# Light Collection in a Polished Plastic Scintillator Read Out by Side-Mounted SiPMs: a Geant4 Matrix Simulation Study

J. Turko

October 22, 2026

**Abstract**

We describe a Geant4 (v11.3.2) simulation of a 250 mm×250 mm×10 mm polished plastic scintillator (PVT, UPS-92S/EJ-200 class) read out by side-coupled silicon photomultipliers (SiPMs), modelled on the muon-trigger detector of Rao *et al.* [J. Appl. Phys. **138**, 114504 (2025)], and ask how far it reproduces the *measured* light-collection behaviour of four surface treatments.

The physics question is sharper than it first appears, because the four treatments differ in *how* they return light to the plate: the paint returns it diffusely, the two mirrors specularly, and the bare plate returns none at all. A polished plate facing a black holder traps light by total internal reflection over a cone of half-angle 39.3°, but every photon outside that cone dies on the black wall, whereas the two mirrors keep the same cone and hand the escaped fraction back with a reflectivity of 0.90–0.96. Even in the idealised model the bare plate is therefore dimmer than both mirrors—only the diffuse paint is dimmer—and in the measurement it is the dimmest of the four. We resolve that inversion with two calibrated surface parameters—a mean-field plate–holder contact fraction $f$ and the optical backing of the aluminium foil—and then show that the measured ordering is recovered for every directly-coupled layout.

The five layouts include a corner-cut variant, Config 2 (mod), which replaces the square corners by 45° chamfers and mounts one sensor on each cut face. With $f = 0.045$ and an air-backed foil, a 60-file matrix scan (5 SiPM layouts × 4 treatments × 3 beam positions, 2500 events each) and a whole-plate irradiation (25 000 events per configuration and treatment) give, for all five layouts,

$$\text{bare} < \text{TiO}_2 < \text{Al} < \text{glossy},$$

with glossy paper brightest, air-backed aluminium within 91 % to 92 % of it, and the contact-limited bare plate weakest. Config 2 (mod) keeps the ordering but moves the brightest patch to the instrumented corner and leaves the plate centre relatively dark. The ordering is explained by a single mechanism: the response tracks the *distance from the interaction point to the nearest sensor* whenever the cavity is not a perfect light mixer, so the diffuse paint (contrast $\kappa_{2D} = 1.91$–$10.90$) and the contact-limited bare plate (1.56–4.14) are position dependent, while the specular wrappers (1.07–1.37) are not. That same mechanism is what makes the eight channels of config 1 a position detector: using a symmetry-augmented nearest-neighbour regression that combines the integrated charges with a 12.5 % optical constant-fraction (CFD) wavefront timing observable, the diffuse paint localises the muon to 12.3 mm per axis from light sharing alone (11.9 mm combined), whereas the specular wrappers carry the information in the arrival-time wavefront instead and reach 15.4 mm–16.2 mm per axis (19.4 mm for the bare plate). We also report per-event photon yields, photoelectron spectra, wavelength and arrival-time distributions, and a systematic comparison with the published measurements, including the one wrapper for which the simulation and the measurement disagree on the sign of the position trend. A ten-design controlled campaign then isolates what each design knob is worth: the larger sensor is the only near-total improvement (2.1 times the light and 1.4 times better position resolution for 2.25 times its area), blackening the four narrow faces buys a factor 3.6 in timing at 88 % of the light, and a fibre read-out on every face buys the flattest response and the best resolution per photoelectron at the price of speed.

## Contents


**1 Introduction and motivation** **3**

**2 The measurement being reproduced** **4**
2.1 What was measured . . . 4
2.2 The statements this simulation is tested against . . . 5
2.3 Where the model deliberately departs from the experiment . . . 6

**3 The detector and its optical model** **6**
3.1 Scintillator plate . . . 6
3.2 SiPM readout and coupling . . . 7
3.3 Reflector treatments . . . 8
3.3.1 Bare plate in its black holder . . . 9
3.3.2 Titanium-dioxide paint (EJ-510) . . . 10
3.3.3 Aluminium foil . . . 10
3.3.4 High-gloss photo paper . . . 11
3.4 Config 4: wavelength-shifting fibre clamp . . . 11
3.5 Summary of detector parameters . . . 14
3.6 Optical property tables . . . 14
3.7 Optical physics implementation . . . 17
3.8 Wavelength shifting . . . 17
3.9 Photodetection: the SiPM photocathode . . . 18
3.10 Per-event optical accounting . . . 18

**4 Simulation campaigns and surface calibration** **19**
4.1 Beam, irradiation patches, and efficiency definition . . . 19
4.2 Bare-plate holder contact . . . 21
4.3 Aluminium backing: grease versus air . . . 23

**5 Light collection: yield and the wrapper ordering** **25**
5.1 The three-patch matrix scan . . . 25
5.2 The whole-plate average . . . 32
5.3 Survival versus mixing: the two axes that organise every result . . . 34

**6 The uniformity of the response over the plate** **35**
6.1 Full-plate maps . . . 35
6.2 A single number for the spread: $\kappa_{2D}$ . . . 40
6.3 The shape of the field: distance to the nearest sensor . . . 43

**7 The spectral and temporal signature of the detected light** **45**
7.1 Wavelength of detected photons . . . 45
7.2 Arrival times and pulse persistence . . . 46

**8 Position reconstruction from the SiPM pattern** **49**
8.1 What the eight channels measure . . . 50
8.2 A better clock than the first photon . . . 50
8.3 Two ways to localise the muon . . . 52
8.4 What the eight channels see . . . 53
8.5 Linear opposite-pair response: first hit versus optical CFD . . . 55
8.6 Performance of the learned estimator . . . 56
8.7 Response and resolution map . . . 57
8.8 What this would require in practice . . . 59

8.9 What the eight-sensor read-out buys . . . 60

**9 Comparison with the measurement 61**
9.1 The bare configuration and the detection-efficiency threshold . . . 62
9.2 The one disagreement: the position trend of the diffuse paint . . . 65

**10 What the design knobs are worth: a controlled design study 65**
10.1 What the designs look like . . . 67
10.2 What each knob buys in light . . . 70
10.3 Where the light goes . . . 73
10.4 Timing: what the light costs on the way out . . . 75
10.5 Position resolution, and the trade-off the four knobs obey . . . 75
10.6 What to build . . . 76

**11 Caveats and open items 77**

**12 Summary 79**

**A Geant4 optical-physics implementation notes 80**
A.1 The boundary process and the unified surface model . . . 80
A.2 Reflector finishes . . . 81

**B The position-reconstruction machinery in detail 81**
B.1 The first-arrival time as an extreme order statistic . . . 81
B.2 Variants of the constant-fraction estimator . . . 82
B.3 The learned estimator in detail . . . 82

## 1 Introduction and motivation

Plastic scintillators read out at their edges by SiPMs are attractive for large-area, low-cost muon triggers and veto systems for cosmic-ray muon tomography [18, 19]. The amount of scintillation light that reaches the photosensor is governed almost entirely by how the non-instrumented faces of the plate are treated: a polished face traps light by total internal reflection (TIR) over a cone of half-angle 39.3°, and what happens to the light that leaves that cone—handed back by a mirror, re-emitted diffusely by a paint, or absorbed by a black wall—decides the yield. Understanding this trade-off quantitatively is the central design question, and it is precisely where simulation is most useful, because the photon transport is a multi-bounce random walk that is difficult to model analytically [7].

Of the four surface treatments compared in Ref. [1]—no reflective layer at all, a white $TiO_2$ paint, aluminium foil and high-gloss paper—the bare plate is the only one that returns no light to the plate at all. It is a polished TIR guide, but every photon outside its 39.3° cone crosses the air gap and is absorbed by the black holder, whereas the two mirrors keep exactly the same cone and hand the escaped fraction back with a reflectivity of 0.90–0.96. The naive expectation, that a polished plate in a black holder should be at least as good as a diffuse paint, is the opposite of what the experiment finds, and the reason is not obvious: in the idealised model ($f = 0$) the bare plate collects 305 $N_{\mathrm{pe}}$/event at the config-1 centre—more than the diffuse paint (125) but less than air-backed aluminium (482) and glossy paper (521)—whereas in the measurement it collects the *least* of the four. A clamped plate touches its holder at scattered high spots, and each contact frustrates the total internal reflection that the whole design relies on. Reproducing the measurement therefore requires modelling not only the reflectors but also the *non*-reflector, and the size of that hidden loss channel has to be calibrated against data.

This report documents a Geant4 (v11.3.2) [2, 3] simulation built to address that question for the specific geometry and surface treatments of Ref. [1]. The deliverable is a self-contained

"matrix scan": every combination of five SiPM layouts and four reflector treatments, at three beam positions on the plate, plus a uniform whole-plate irradiation. The goal is not to fit a single number but to test how far the simulation reproduces the *ordering* and the *position dependence* of the light-collection efficiency that the experiment observes, to expose the physics behind both the parts it reproduces and the parts it does not, and to quantify the residuals.

Table 1 collects the whole study in one place, so that the individual sections can be read as the derivation of the numbers in it. The three quantities are the mean number of photoelectrons per muon crossing (whole-plate irradiation, 25 000 events per cell), the position contrast $\kappa_{2D}$ of the full-plate efficiency field (the ratio of the brightest to the darkest 50 mm cell), and, for config 1, the per-axis resolution with which the eight-channel pattern localises the muon.

**Table 1:** The study at a glance. *Left*: mean number of photoelectrons per muon crossing, from the uniform whole-plate irradiation (25 000 events per cell). *Right*: the position contrast $\kappa_{2D}$ of the full-plate efficiency field, i.e. the ratio of the brightest to the darkest 50 mm cell. C2m abbreviates Config 2 (mod); its photoelectron yields are per generated event and are 0.48 % higher per entering event. *Last column*: the per-axis resolution $\sigma_x$ with which the eight SiPM channels of config 1 localise the muon (Sec. 8).

| | photoelectrons / event | | | | | position contrast $\kappa_{2D}$ | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Treatment | C1 | C2 | C2m | C3 | C4 | C1 | C2 | C2m | C3 | C4 | $\sigma_x$ [mm] |
| Bare | 79.9 | 40.4 | 38.8 | 20.5 | 19.5 | 1.56 | 2.08 | 2.84 | 4.14 | 3.35 | 19.4 |
| $TiO_2$ | 186.1 | 94.1 | 92.6 | 47.9 | 36.9 | 1.91 | 2.56 | 3.69 | 8.41 | 10.90 | 11.9 |
| Al | 480.8 | 253.8 | 242.6 | 129.2 | 82.8 | 1.07 | 1.14 | 1.22 | 1.30 | 1.37 | 15.7 |
| Glossy | 520.7 | 275.1 | 267.4 | 140.7 | 87.0 | 1.07 | 1.13 | 1.18 | 1.28 | 1.36 | 15.9 |

The remainder of this document is organised as follows. Section 2 states precisely what Ref. [1] measured, which of its statements this simulation can be tested against, and where the model deliberately departs from the experimental geometry. Section 3 describes the detector model: the scintillator, the SiPM read-out, the five read-out layouts (including the wavelength-shifting fibre clamp of config 4 and the corner-cut Config 2 (mod)), the reflector treatments, the tabulated optical inputs that the transport actually consumes, and the optical-physics implementation. The line-by-line verification of the Geant4 boundary process against the Geant4 source is collected in Appendix A. Section 4 describes the simulation campaigns and fixes the two unmeasured surface inputs first: the beam and patch setup, the bare-holder contact scan, and the aluminium grease-versus-air comparison. These select the nominal contact fraction and Al backing used everywhere below. Section 5 presents how much light is collected and why the wrapper ordering comes out the way it does; Sec. 6 presents how uniform the response is over the plate and what sets it; Sec. 7 presents the spectral and temporal signature of the detected light. Section 8 turns the whole-plate data set into a position-reconstruction study, and Sec. 9 compares the whole set of results with the published measurements. Section 10 isolates the design knobs themselves—the finish of the four narrow faces, the sensor area, the sensor arrangement and a wavelength-shifting read-out on every face—in a ten-design controlled campaign. Section 11 documents the open items, and Sec. 12 summarises.

## 2 The measurement being reproduced

Before presenting results it is worth stating what is being reproduced, in the terms of the experiment, and where the model and the experiment are known to differ. Everything in this section is quoted from Ref. [1].

### 2.1 What was measured

A 250 mm×250 mm×10 mm plate of UPS-92S organic scintillator is read out by CEFLA S.C. ASD-NUV4S-P-40 SiPMs, each with a 4 mm×4 mm active area, mounted on the *narrow* side

faces of the plate. That choice is deliberate: because the area of the narrow faces is small, a large fraction of the light is transported by total internal reflection off the large faces and then collected towards the narrow ones, so the detected yield is higher on the narrow faces than on the large ones. Configurations with the SiPM and the fibre clamp on the large faces were explicitly not considered, for the same reason.

Four *surface treatments* were applied to the non-instrumented faces, in addition to the bare plate:

1. EJ-510 white reflector paint with $TiO_2$ suspension (Eljen Technology);
2. commercial aluminium foil, shiny side out, with small amounts of optical grease applied selectively to ensure contact between the scintillator and the reflective layer;
3. no reflective material at all — the polished plate simply *placed* in a black 3D-printed holder;
4. super high-gloss resin-coated photo paper ($300\,\mathrm{g\,m^{-2}}$, Print4Life), cut to size and placed on each surface *without* grease.

These are the four treatments modelled here, one-to-one.

Four *read-out configurations* were then assembled (Table IV of Ref. [1]); these are modelled here, and a fifth variant is added:

**Config 1** eight SiPMs, two on each of the four narrow faces (`TBLR1`, `TBLR2`), $128\,\mathrm{mm^2}$ of active area in total;

**Config 2** four SiPMs, one on each narrow face (`TBLR1`), $64\,\mathrm{mm^2}$;

**Config 2 (mod)** the same four $4\,\mathrm{mm}\times4\,\mathrm{mm}$ sensors and $64\,\mathrm{mm^2}$ of active area as Config 2, but mounted on four 45° corner chamfers instead of the lateral faces; the plate becomes a convex octagon (Sec. 3);

**Config 3** two SiPMs, both on the same narrow face (`T1`, `T2`), $32\,\mathrm{mm^2}$;

**Config 4** one SiPM plus a wavelength-shifting fibre clamp, whose four fibres provide an effective collection area of $2500\,\mathrm{mm^2}$.

The efficiency was measured with a muon coincidence detector (MCD) system of two $50\,\mathrm{mm}\times50\,\mathrm{mm}\times10\,\mathrm{mm}$ reflective-painted reference scintillators read out by photomultiplier tubes. The MCD was placed over one of three *regions of interest* on the plate — the central region, a middle-edge region and a corner region — and coincidences between the two MCD arms provided the reference muon sample. The reported observable is the detection efficiency

$$\mathrm{DE}(u_{\mathrm{thresh}}) = \frac{N_{\mathrm{det}}(u_{\mathrm{thresh}})}{N_{\mathrm{ref}}}, \tag{1}$$

i.e. the fraction of reference muons that produce a trigger signal above the discriminator threshold $u_{\mathrm{thresh}}$, together with the pulse-height (detected photon yield) distribution of the trigger itself.

### 2.2 The statements this simulation is tested against

The experiment reports a small number of clear, qualitative statements, and these are the yardstick used in Sec. 9:

- configurations *without* a reflective layer consistently produce the lowest detected photon yield at the SiPMs;
- the signal-to-noise ratios are highest and nearly identical for the aluminium foil and the high-gloss paper;
- the lowest detected photon yield distributions occur for all configurations when the MCD is positioned at the *corner* of the scintillator plate;
- all configurations except those without a reflective layer reach a detection efficiency of 80 % or more at $u_{\mathrm{thresh}} = 400\,\mathrm{mV}$, whereas the bare configuration is the only one that falls short;
- the WLS-fibre configuration (config 4) produces a significantly higher detected photon yield distribution than config 3 at all measurement positions, and reaches a detection efficiency of 90 % at $u_{\mathrm{thresh}} = 400\,\mathrm{mV}$ across its full active area;
- the converted (wavelength-shifted) photons still produce electrical signals with approximately 30 % efficiency.

The first three concern the *ordering* of the treatments and the *sign* of the position trend, and are the statements this simulation reproduces, fails to reproduce, or contradicts; the fourth and fifth are threshold statements that the simulation can address only indirectly, since it contains no electronics (Sec. 11); the sixth quantifies the optical efficiency of the WLS path and is the natural yardstick for the one configuration that the simulation does *not* reproduce.

### 2.3 Where the model deliberately departs from the experiment

Two geometric departures are worth stating explicitly, because both affect the comparison and neither is accidental.

*The config-3 and config-4 faces.* In the experiment, config 3 reads out the *top* narrow face and the config-4 fibre clamp sits on the *left* narrow face — two adjacent, not shared, faces. In this simulation both assemblies are placed on the same narrow face of the model (Sec. 3), which has the advantage of keeping the four layouts on a common geometric footing and of making the two single-sided layouts directly comparable to each other, at the cost of removing the adjacency that the experiment realises. Any statement about the relative performance of config 3 and config 4 in this report therefore refers to the shared-face geometry and cannot be read as a statement about the experimental pair.

*The position of the irradiated patches.* The three regions of interest are defined by where the MCD is placed, and in the experiment they are chosen so that the MCD (which is 50 mm square) sits entirely on the plate. Here the same requirement is imposed, and the edge and corner patches are placed on the side of the plate *opposite* the instrumented face of the single-sided layouts, so that the three patches sample the far side of the cavity for configs 3 and 4.

Finally, the experiment itself warns that the four configurations "cannot be directly compared with one another", because the number of parallel SiPMs changes the total input capacitance, the effective gain and the mean probability of a photon hitting the sensitive area. The same caveat applies here, and it is the reason the results below are presented per layout rather than pooled.

## 3 The detector and its optical model

### 3.1 Scintillator plate

The active volume is a rectangular PVT scintillator $250 \times 250 \times 10$ mm, mirroring the UPS-92S plate of Ref. [1]. It is assigned the Geant4 NIST base material `G4_PLASTIC_SC_VINYLTOLUENE` with a custom optical properties table built from the EJ-200 and UPS-923A data sheets [11, 12, 13]. The optical constants—the refractive index ($n = 1.58$, essentially flat across the visible), light yield, emission peak, bulk attenuation length, scintillation decay and rise times, and the Birks constant [14, 15]—are collected in Table 3 and are not repeated here. Two entries are deliberate modelling choices rather than quoted numbers: the bulk attenuation length is peaked at 3.8 m but falls steeply in the UV to model self-absorption of the short-wavelength part of the emission, and the emission spectrum (Fig. 4) is essentially zero below 380 nm and above 550 nm. Both scintillation and Čerenkov photons are produced and tracked; the optical grid spans 310 nm to 700 nm so that the Čerenkov continuum, which extends well below the scintillation band, is covered.

For Config 2 (mod) only, the plate is a convex octagon rather than a box: each corner is cut by a 45° plane with a 12 mm leg, so the outline is $|x| + |y| \leq 238$ mm and the eight vertices are $(125, \pm 113)$, $(-125, \pm 113)$, $(\pm 113, 125)$ and $(\pm 113, -125)$ mm. The solid is built analytically as a Geant4 `G4ExtrudedSolid`, so the four diagonal faces have exact normals; the four 4 mm sensors are centred on them at $(\pm 119, \pm 119)$ mm (report frame) and are flush with the face. The cut removes 0.461 % of the plate area, all at the corners. Setting the cut length to zero restores the plain `G4Box` bit-for-bit, which is how the other layouts are built.

### 3.2 SiPM readout and coupling

Each SiPM [8] is modelled mechanically as a $4 \times 4 \times 0.6\,\text{mm}$ box of "SiPM epoxy" ($n = 1.55$), coupled to a side face of the plate through a 0.1 mm silicone grease pad ($n = 1.46$). The coupling chain is therefore *scintillator* → *grease* → *SiPM*, with Fresnel transmission at each dielectric interface and photodetection at the final grease/SiPM boundary. This describes the side-mounted sensors of configs 1, 2, 2 (mod) and 3. In config 4 the read-out SiPM instead sits at the $-y$ end of the WLS fibre bundle, and its $4\,\text{mm} \times 4\,\text{mm}$ grease pad overlaps the slab's $-y$ face: the pad centre is at $(x, y) = (-125.55, -125.05)\,\text{mm}$, so 1.45 mm of its width crosses the slab edge and $5.8\,\text{mm}^2$ of the $16\,\text{mm}^2$ pad is in direct optical contact with the scintillator. That contact is modelled explicitly and is on by default (Sec. 3.4), so the config-4 SiPM receives both direct blue light through the contact and green wavelength-shifted light from the fibre ends.

Five layouts are studied (schematic in Fig. 1):

**Config 1 (8 SiPMs)** two SiPMs per side face, at ±50% of the half-length.

**Config 2 (4 SiPMs)** one SiPM per side face, at the *same* ±50% offsets as config 1—i.e. config 1 with one device removed per side, the removed slot rotated from side to side so the layout remains four-fold symmetric.

**Config 2 (mod) (4 SiPMs)** the four corners of the square are truncated by 45° cuts with a 12 mm leg, giving a convex octagon with four 17.0 mm-wide diagonal faces at $(\pm 119, \pm 119)\,\text{mm}$ in the report frame. One $4\,\text{mm} \times 4\,\text{mm}$ SiPM is centred on each cut face, so the four sensor normals point towards the plate centre. This is a variant of Config 2, not one of the four Table IV layouts.

**Config 3 (2 SiPMs)** both SiPMs on the *same* narrow face—the $-x$ face in the simulation frame, which is the report plan view's top edge (Sec. 4)—at ±50%, matching T1/T2 of Ref. [1].

**Config 4 (1 SiPM + WLS clamp)** a single SiPM reading out a wavelength-shifting (WLS) fibre clamp along the $-x$ narrow face (Sec. 3.4).

SiPM footprints are clamped so they cannot overhang the slab face.

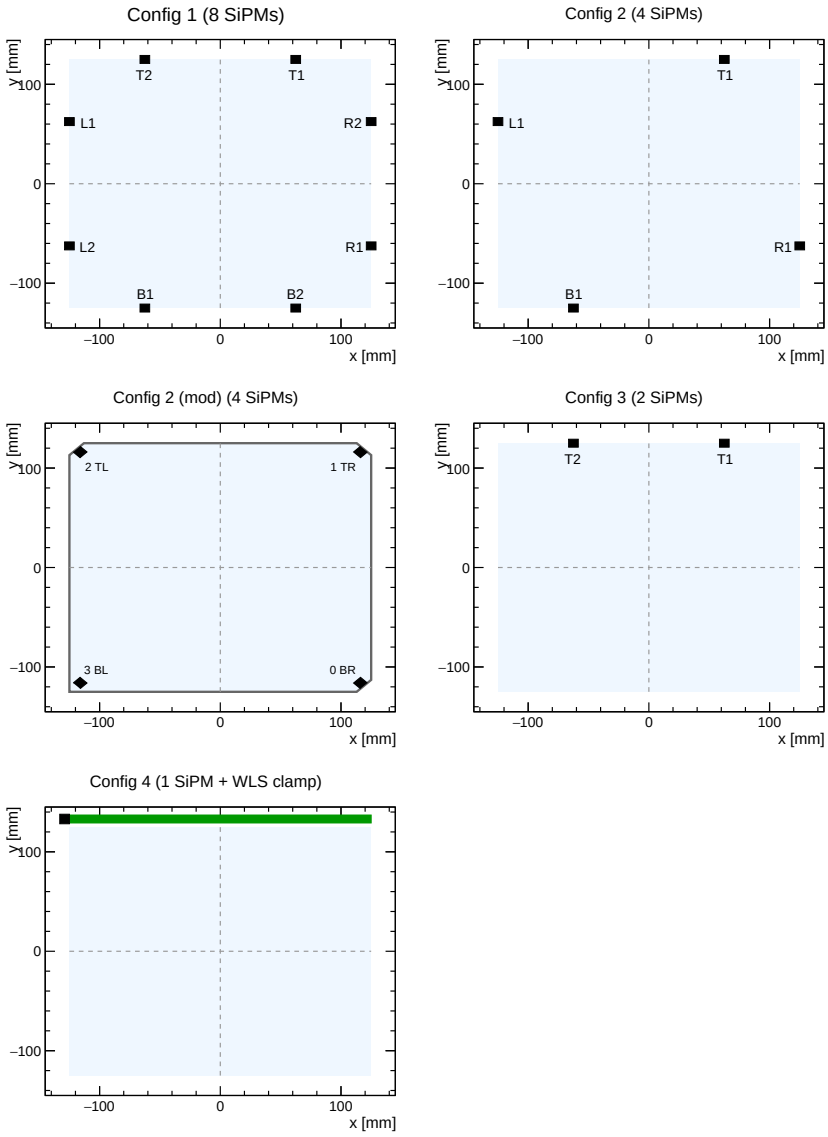



**Figure 1:** Schematic plan view of the five detector layouts on the 250 mm×250 mm plate footprint, in a $2 \times 3$ grid whose last cell is empty. Black squares mark the SiPMs (drawn oversized for visibility; the active area is 4 mm×4 mm; side-mounted except for the diagonal faces of Config 2 (mod)), and the dashed grey lines are the $x = 0$, $y = 0$ axes. Config 1 places two SiPMs on each of the four edges; config 2 places one SiPM per edge at the same offsets as config 1 (one device removed per side); Config 2 (mod) cuts the four corners at 45° and puts one SiPM on each diagonal face at $(\pm 119, \pm 119)$; config 3 places both SiPMs on the top ($+y$, report frame) edge; config 4 uses a single SiPM reading out a WLS fibre clamp on the same top edge, with the read-out SiPM at its left end (green bar), following Fig. 3(b) of Ref. [1]. In the simulation frame both configs 3 and 4 sit on the $-x$ narrow face (the report plan view maps $(x, y) \to (y, -x)$). The inwards-offset labels name the eight side-mounted sensors (T/B/R/L = top/bottom/right/left); on each edge "1" marks the sensor nearer the corner reached when travelling clockwise around the perimeter, so "1" sits at the top-right (T1), bottom-right (R1), bottom-left (B1) and top-left (L1) corners. This is the scheme used in the light-sharing discussion below. The same black-square markers are overlaid on the collection-efficiency maps of Figs. 18–22.

### 3.3 Reflector treatments

Four treatments are applied as a *logical skin* over the non-instrumented surfaces of the plate; the grease/SiPM patches override the skin locally with dedicated *border* surfaces. The mapping from each physical treatment to the Geant4 optical-surface parameters is the heart of the model—it determines the light-collection ordering—so it is given in full. Table 2 lists every property that is

actually attached to each surface, and the subsubsections below describe each reflector physically, state how it is modelled, and assess how faithfully the model represents the real object. (A fifth finish, PTFE tape, exists in the code for completeness but is not part of the reference study.) The strong sensitivity of light collection to the wrapping and reflector choice is well established experimentally [21].

**Table 2:** Geant4 optical-surface parameters for the four reflectors, exactly as attached in `src/GeometryMuonScint.cc`. $R(\lambda)$ is tabulated on the shared ten-point 360 nm to 650 nm grid and quoted here as its range; the full arrays are in the code. A dash marks a property that is neither set nor used for that finish.

| | **Bare** (black holder) | **$TiO_2$** (EJ-510 paint) | **Al foil (grease/air)** (backing choice) | **Glossy** (photo paper) |
|---|---|---|---|---|
| Physical contact | 1.2 mm air gap | direct (optical) | grease film / air gap | air gap |
| Geant4 surface object | none* | skin | skin | skin |
| Type | `dielectric_dielectric` | `dielectric_dielectric` | `dielectric_dielectric` | `dielectric_dielectric` |
| Model | `glisur`* | `unified` | `unified` | `unified` |
| Finish | `polished`* | `groundfront-painted` | `polished-backpainted` | `polished-backpainted` |
| `sigma_alpha` | — | 0.10 rad | 0 | 0 |
| `REFLECTIVITY` $R(\lambda)$ | — | 0.955–0.983 | 0.904–0.925 | 0.900–0.955 |
| Backing `RINDEX` | — | — | 1.46 grease / 1.0003 air | 1.0003 (air) |
| `SPECULARSPIKE` $f_{ss}$ | — | 0 | 1 | 1 |
| `SPECULARLOBE` $f_{sl}$ | — | 0 | 0 | 0 |
| `BACKSCATTER` $f_{bs}$ | — | 0 | 0 | 0 |
| Total internal reflection | yes (Fresnel/TIR) | no (Lambertian) | grease/air ($\leq 67.5°$ grease) (full cone air) | yes (full cone) |

*The bare plate carries *no* surface object: Geant4 then applies its built-in `glisur/polished dielectric_dielectric` default, with Fresnel and TIR taken from the material refractive indices. The black holder shell, in contrast, does carry an absorbing skin (`MuonScintHolderAbsorber`, a `polished dielectric_dielectric` surface with `REFLECTIVITY` = `TRANSMITTANCE` = 0), so the sub-critical light that refracts across the air gap is killed at the wall—and the holder bulk, with its 1 µm absorption length, would absorb it anyway. The bare model also carries an optional mean-field contact fraction $f$ (production default $f = 0.045$; the clean air-gap reference is $f = 0$); for $f > 0$ every hit on a bare face is absorbed with probability $f$ ($R = 1 - f$, $T = 0$), representing partial plate–holder contact.

### 3.3.1 Bare plate in its black holder

*Physical object.* The polished UPS-92S plate is placed in a black 3D-printed ABS enclosure, its faces simply resting near the wall.

*Model.* No wrapping skin is attached. The plate keeps its native polished scintillator ($n = 1.58$) against air ($n = 1.0003$) across a real 1.2 mm gap; light below the critical angle ($\arcsin(1/1.58) = 39.3°$) refracts across the gap and is absorbed in the holder, whose black ABS has an attenuation length of 1 µm, while light above it is returned by total internal reflection. Fresnel reflection and TIR are taken from the material `RINDEX` tables.

*Fidelity.* This is the least faithful configuration and the source of the report's central modelling choice. A real clamped plate touches the holder at scattered high spots, and each contact forms a frustrated-TIR sink that removes trapped light; surface scratches do the same. Those loss channels are absent in the clean air-gap model ($f = 0$), where the plate keeps the full TIR cone but loses the whole sub-critical fraction at the black wall: it is brighter than the diffuse paint but dimmer than the two mirrors in every layout (305 $N_{\mathrm{pe}}$/event at the config-1 centre, against 482 for air-backed aluminium and 521 for glossy paper), whereas the reference measurement gives it

the *lowest* signal of all four treatments. The code therefore offers an optional mean-field contact fraction, `/dcs-monitor/det/muonScint/setBareContactFraction <f>` ($0 \le f \le 1$): for $f > 0$ every hit on a bare face is absorbed with probability $f$ (a polished `dielectric_dielectric` skin with `REFLECTIVITY` $= 1 - f$ and `TRANSMITTANCE` $= 0$), representing frustrated TIR over an effective contact area. The loss is applied to every bare layout, including config 4, whose bare faces carry the same skin (only the clamp face is exempt, being coupled to the plate through the grease film). The dedicated scan (Sec. 4.2) gives a nominal $f = 0.045$, the smallest sampled fraction that places all nine config/position cells below the corresponding $TiO_2$ reference; $f = 0$ is kept as the clean-air reference and lower bound on the loss.

### 3.3.2 Titanium-dioxide paint (EJ-510)

*Physical object.* A white, diffuse-reflectance paint applied directly to the plate (three coats, $\approx 0.11$ mm), in optical contact with the scintillator.

*Model.* `groundfrontpainted` with a purely Lambertian reflection: a random draw against `REFLECTIVITY` returns the photon with a cosine-law distribution and *no* specular or TIR component ($f_{ss} = f_{sl} = f_{bs} = 0$). The reflectance rises from 0.955 in the UV to a plateau of 0.983 near 470 nm.

*Fidelity.* The Lambertian/no-TIR treatment is the physically correct description of light emerging from a thick, strongly scattering paint, and is this wrapper's strongest feature. The *absolute* reflectance curve is its weakest: no public spectral-reflectance data exist for EJ-510, so $R(\lambda)$ is a fitted representative white-paint curve ($\approx 0.96$–$0.98$), not a measurement of the actual coating, and no angular dependence of the diffuse lobe is modelled. The `sigma_alpha` value is set for bookkeeping but is inert at this finish (`groundfrontpainted` reflects diffusely regardless of the facet normal).

### 3.3.3 Aluminium foil

*Physical object.* Commercial shiny aluminium foil wrapped around the plate; per Ref. [1] optical grease is applied in places so that the foil contacts the scintillator rather than leaving an air gap.

*Model.* `polishedbackpainted` with a selectable backing refractive index, chosen pre-init with `/dcs-monitor/det/muonScint/setAlBacking air|grease`. The production choice is `air` ($n = 1.0003$), which leaves the full TIR cone intact and lets only the sub-critical fraction cross to the foil, modelling a foil separated from the plate by a trapped air layer. The alternative, `grease` ($n = 1.46$), represents a foil applied over the coupling grease, as in Ref. [1]; the scintillator/grease interface is a normal Fresnel/TIR boundary, but since the index step is small the critical angle is wide ($\arcsin(1.46/1.58) = 67.5°$): most light refracts into the grease film and is returned by the foil as a pure *specular* reflection ($f_{ss} = 1$). It is retained as the lower-bound systematic. In both cases `REFLECTIVITY` is the normal-incidence reflectance of evaporated aluminium computed from the McPeak *et al.* $n, k$ data [20] (0.904 at 650 nm rising to 0.925 at 360 nm).

*Fidelity.* Two idealisations. (i) The tabulated reflectance is that of a smooth evaporated film and is therefore an *upper bound*: household foil is rougher and carries a native oxide, both of which lower $R$ and add a small diffuse component we do not model. (ii) The foil is assumed to cover the plate uniformly, whereas real wrapping leaves wrinkles and trapped air. The production campaign uses the `air` backing, which retains the full TIR cone and recovers the measured near-equality of aluminium and glossy paper, reaching 91 % to 92 % of the glossy yield in the five direct-coupled layouts. The `grease` backing is retained as the lower-bound systematic (Sec. 4.3). Note that the air backing is itself the *optimistic* end of the physical range: it is the limiting case of a perfectly trapped air layer, whereas the experiment describes grease applied *selectively*, i.e. a foil that contacts the plate in places and is decoupled in others. Neither extreme is the real object, and the scan of Sec. 4.3 brackets them.

### 3.3.4 High-gloss photo paper


*Physical object.* A commercial super-high-gloss photographic paper (Print4Life, $300\,\mathrm{g\,m^{-2}}$) wrapped around the plate with an air gap (no grease).

*Model.* `polishedbackpainted` with the backing index set to air ($n = 1.0003$), so the plate retains its full TIR cone and only the sub-critical fraction crosses the gap to the paper, which returns it as a specular reflection ($f_{ss} = 1$) with a fitted $R(\lambda) \approx 0.900$–$0.955$—slightly lossier than the aluminium.


*Fidelity.* The reference reports glossy paper and aluminium foil as the two best wrappers (large, nearly equal signals), which motivates modelling glossy paper as a *slightly lossy mirror* rather than a diffuser. This is a model choice rather than a measurement: real photo paper is not a true mirror and has a diffuse component, and its $R(\lambda)$ is again fitted (no measured data), so this is the reflector whose optical model is least constrained by independent data.

## 3.4 Config 4: wavelength-shifting fibre clamp


The fourth layout follows the single-SiPM, WLS-readout variant of Ref. [1]. Four 1.0 mm-diameter Kuraray Y-11(200) multi-clad wavelength-shifting fibres [16, 17] run the full 250 mm length of the $-x$ narrow face in a single row. Over most of the length they are parallel at a 2.5 mm centre-to-centre pitch—so a solid web of clamp material separates the milled 1.1 mm channels—and converge over a 41 mm length (39 mm ramp plus a 2 mm stub) to a touching 1.0 mm bundle that presents all four ends to a single 4 mm×4 mm SiPM at the $-y$ end; their far $+y$ ends are closed by individual aluminium mirror caps. Each fibre is modelled as a multi-clad guide: a Y-11 core ($n = 1.59$) inside a PMMA inner cladding ($n = 1.49$) inside a low-index fluoropolymer outer sheath ($n = 1.42$)—the low-index staircase that sustains core–cladding total internal reflection. In the production geometry the fibre solid is an analytic, mitered set of `G4CutTubs` legs (one per straight segment of the bent centreline), placed so adjoining legs meet at exact miter planes; this facet-free construction is what the runs use. (An earlier tessellated swept cylinder, which occasionally produced stuck optical tracks, is retained as an optional visualisation-only variant.) A thin 0.10 mm grease film couples the plate face to the clamp, and each fibre protrudes 0.05 mm through its channel mouth into that film, keeping the grease continuous against the scintillator. The deliberate 0.05 mm air annulus between the 1.0 mm fibre and its 1.1 mm channel is essential: the fibre must not touch the clamp ($n = 1.55$), and the outer sheath ($n = 1.42$) needs the low-index clearance to keep guiding the light. The clamp body is 3D-printed white plastic, modelled by default as a Lambertian reflector with 85 % reflectivity applied to *every* clamp face (channel walls and grease-facing front included), so light leaking out of the fibre is returned rather than lost. The far-end mirror is a full aluminium disc whose logical volume carries a reflecting skin as well as the fibre–cap border surfaces, so that light travelling in the *core*—not only the cladding—is also turned around at the far end. WLS re-emission is drawn from the digitized Y-11 emission spectrum with an exponential delay of 7 ns (Sec. 3.8), and the `G4OpWLS` process is enabled automatically when this geometry is built. In the report's top-down frame the clamp runs along the *top* edge with the single read-out SiPM at the *top-left* corner, as in Fig. 3(b) of Ref. [1]. Unlike the side-mounted sensors of configs 1–3, this read-out SiPM is coupled to the slab as well as to the fibres. Its 4 mm×4 mm grease pad is centred at $(x, y) = (-125.55, -125.05)$ mm and therefore overlaps the slab's $-y$ face by 1.45 mm×4 mm ($5.8\,\mathrm{mm^2}$); this is a real optical contact, not a gap. The contact is implemented with a pair of `G4LogicalBorderSurface` objects carrying the polished Fresnel coupling surface in both directions, so that it locally overrides the reflector skin and the SiPM sees direct blue scintillation light through the pad. The direct path is enabled by default (`setWLSPadSlabContact true`); setting it to `false` restores the legacy fibre-only model, in which the pad is separated from the slab and the SiPM receives only wavelength-shifted light from the fibre ends.

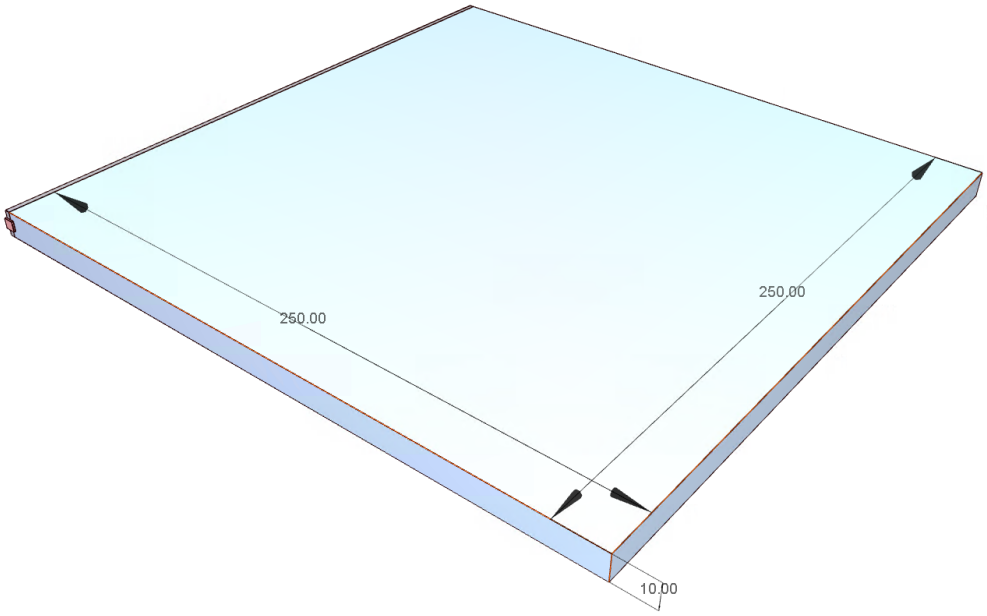


**(a)** Three-dimensional view of the complete config-4 assembly, with the principal dimensions annotated.

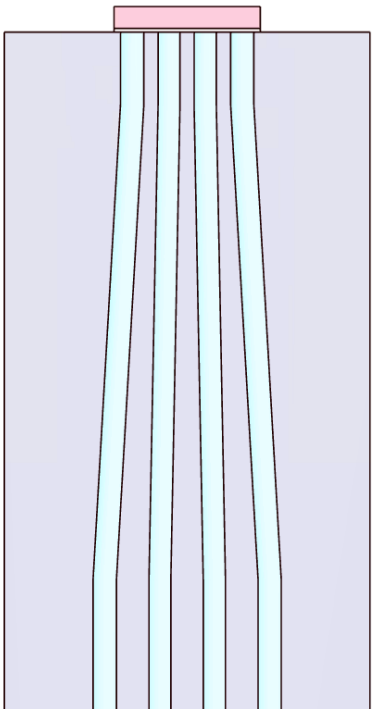


**(b)** Top view of the black fibre clamp: the four fibre channels and the read-out SiPM at the end of the converged bundle (report-frame top-left).

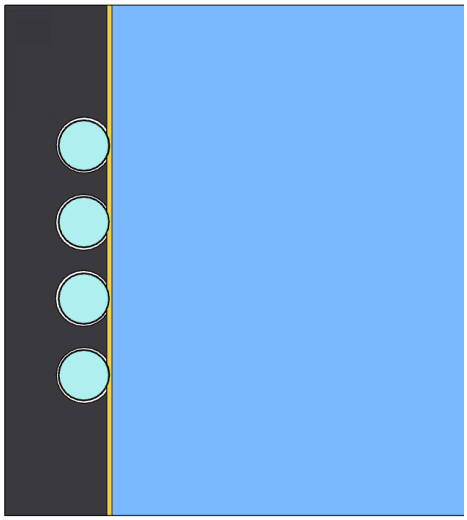


**(c)** Cross-section through the clamp: the scintillator, the thin grease film in the slab–clamp gap, the four fibre discs seated in their 1.1 mm channels with a 0.05 mm air annulus, and the outboard black clamp.


**Figure 2:** Geometry-only views of the config-4 WLS-fibre clamp, rendered from the Geant4 VRML geometry export (*no* beam-on). Following the event-display colour scheme, fibre cores are pale green, cladding dark green, the grease film amber, the black clamp and holder dark grey, and the read-out SiPM red. The four 1.0 mm fibres sit on the $-x$ narrow face in 1.1 mm channels separated by clamp webs, with only a thin grease film in the slab–clamp gap; they converge to a bundle read out at $-y$ by one SiPM and mirrored at $+y$. These screenshots show the clamp in its earlier black visualisation colour; the production clamp is white (Fig. 3).

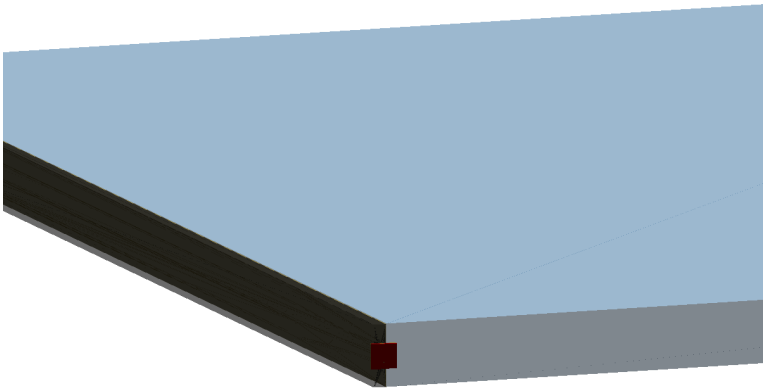

**(a)** Oblique view of the whole plate with the clamp strip on the $-x$ narrow face and the single read-out SiPM at the $-y$ end; the fibres run the full plate length in $y$.

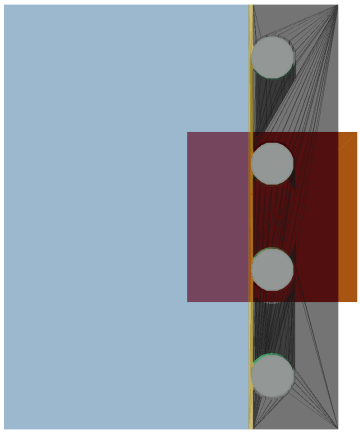

**(b)** Cross-section through the clamp: scintillator, grease film, and the four multi-clad fibre discs seated in their channels.

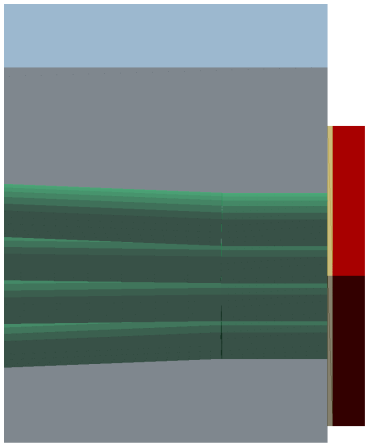

**(c)** Close-up of the four fibre ends converging onto the single read-out SiPM (here the Boolean clamp and grease film are hidden).

**Figure 3:** OpenGL (`TSG_OFFSCREEN`) geometry renders of the config-4 assembly (multi-clad $n = 1.59/1.49/1.42$ fibres, white clamp), generated head-lessly from Geant4 (no beam-on, drawn without wireframe edges). Panels (a) and (b) use the *tessellated* visualisation preset (`macros/muon_vis_wls_ogl.mac`): it is geometrically equivalent to the production analytic preset—identical round 1.0 mm fibres and clamp/grease volumes—but its clamp and grease film render as solids, whereas the analytic cut-tube cutters do not implement `CreatePolyhedron()` and would appear as point clouds. Panel (c) instead uses the *analytic production* geometry (`macros/muon_vis_wls_ogl_coupling.mac`) with only those two Boolean solids hidden, so that the plain `G4CutTubs` fibres, the read-out pad and the SiPM are seen coupling. These renders complement the hand-made VRML screenshots of Fig. 2.

### 3.5 Summary of detector parameters

The principal parameters of the three active components—the scintillator plate, the WLS fibre, and the SiPM—are collected in Table 3, alongside the corresponding values quoted for the reference experiment of Ref. [1]. Where a quantity is not reported in Ref. [1] or is not modelled here, a dash is shown; the simulation follows the experimental values wherever they are available, and the optical model of Sec. 3.7 is built entirely from the values in the last column.

**Table 3:** Principal parameters of the scintillator, the WLS fibre, and the SiPM, comparing the reference experiment of Ref. [1] with the values adopted in this simulation.

| Parameter | Ref. [1] | This simulation |
|---|---|---|
| *Scintillator (UPS-92S / PVT)* | | |
| Material | UPS-92S (AdvTECH UK) | PVT (`G4_PLASTIC_SC_VINYLTOLUENE`) |
| Dimensions | $250 \times 250 \times 10$ mm | $250 \times 250 \times 10$ mm |
| Refractive index | 1.58 | 1.58 |
| Density | 1.05 g cm$^{-3}$ | 1.032 g cm$^{-3}$ |
| Light output | 50–60% of anthracene ($\approx 8$ to $10 \times 10^3$ ph/MeV) | $1.0 \times 10^4$ MeV$^{-1}$ |
| Emission peak | 425 nm | 425 nm (2.917 eV) |
| Bulk attenuation length | 2000 mm | 3.8 m (peak, falling in the UV) |
| Scintillation decay time | 2.4 ns | 2.1 ns |
| Rise time | — | 0.9 ns |
| Birks constant | — | 0.126 mm MeV$^{-1}$ |
| Surface finish | all sides polished | all sides polished |
| *WLS fibre (Kuraray Y-11(200))* | | |
| Fibre diameter | 1.0 mm | 1.0 mm (core+clad) |
| Cladding | multi-cladding | multi-clad: PMMA ($n = 1.49$) + fluoropolymer sheath ($n = 1.42$) |
| Core refractive index | — | 1.59 |
| Absorption peak | 430 nm | 430 nm (digitized Kuraray Y-11) |
| Emission peak | 476 nm | 476 nm |
| Attenuation length | $> 3500$ mm | $\gtrsim 5$ m (transport) |
| WLS absorption length at 430 nm | — | 1.0 mm (systematic 0.3 mm to 3 mm, not scanned) |
| WLS decay time | — | 7 ns (exponential) |
| Read-out arrangement | single row, 250 mm long | 4 fibres, 2.5 mm pitch $\rightarrow$ 1.0 mm bundle (41 mm convergence) |
| Channel diameter | — | 1.1 mm (0.05 mm air annulus) |
| *SiPM (CEFLA S.C. ASD-NUV4S-P-40)* | | |
| Active area | $4 \times 4$ mm$^2$ | $4 \times 4$ mm$^2$ |
| Number of cells | 9340 | — |
| Peak sensitivity | 420 nm | 410 nm |
| Photon detection efficiency | 43% | 0.431 (peak, digitized curve) |
| Epoxy refractive index | 1.5115 | 1.55 |
| Optical coupling | BC-630 grease | 0.1 mm grease film ($n = 1.46$) |
| Gain / dark-count rate / capacitance | $10^6$ / 50–100 kHz/mm$^2$ / 0.84 nF | — (light transport only) |

### 3.6 Optical property tables

Figure 4 plots the spectral input tables actually fed to Geant4, over the 310 nm to 700 nm range used in the transport. The left panel compares the normalised spectral shapes: the scintillator emission peaks at 425 nm, the Y-11 absorption band at 430 nm, and the Y-11 re-emission lies in the green at 476 nm—the shift that makes the config-4 read-out spectrum green. Drawing the WLS absorption and emission on one axis makes their overlap explicit, while the absolute WLS absorption strength is carried by the middle panel. That panel gives the attenuation lengths on a logarithmic scale: the scintillator is transparent across the visible but its bulk attenuation

collapses in the UV, whereas the digitized Y-11 WLS absorption is effectively transparent redward of 500 nm and rises to its 430 nm peak (absorption length 1 mm); the WLS absorption onset is marked by the dashed line near 486 nm. The right panel is the SiPM photocathode efficiency = PDE($\lambda$), the digitized ASD-NUV4S-P-40 curve peaking at 0.431 near 410 nm. These curves are exactly the tabulated points of `src/GeometryMuonScint.cc`; Geant4 interpolates them linearly, so the drawn segments are what the simulation uses. The left and middle panels together therefore carry the complete WLS spectral input (emission and absorption), and no separate WLS-spectrum figure is needed.

The remaining input data are shown in Figs. 5–7, all plotted directly from the same source arrays: the time structure of the two optical sources—the scintillation pulse on linear and logarithmic scales, and the exponential Y-11 re-emission delay (Fig. 5); the tabulated reflectivity $R(\lambda)$ of the three reflective wrappers, also read out at the scintillation and WLS emission peaks (Fig. 6); and the refractive-index ladder, the multi-clad fibre's radial index staircase, and the critical angles implied by it (Fig. 7).

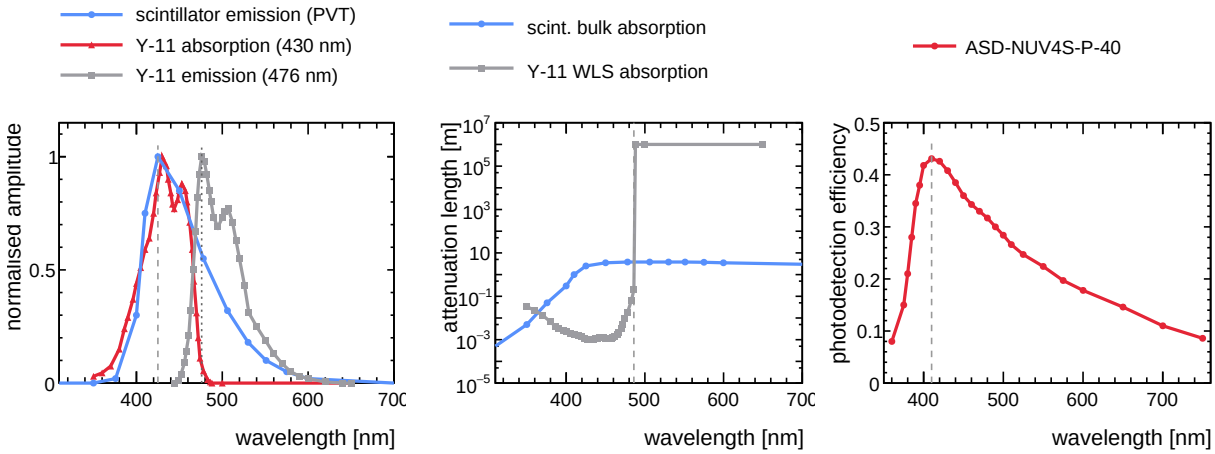



**Figure 4:** Optical property tables used by the simulation. *Left:* normalised spectral shapes of the PVT scintillator emission (peaking at 425 nm) and of the digitized Y-11 WLS fibre absorption (430 nm) and re-emission (476 nm); the absorption/emission overlap is the input to the `G4OpWLS` energy constraint $E'_\gamma \leq E_\gamma$. *Middle:* attenuation lengths on a logarithmic scale—the scintillator bulk absorption and the fibre WLS absorption (absolute scale set to 1 mm at the 430 nm peak). *Right:* SiPM photocathode PDE($\lambda$), the digitized curve peaking at 410 nm. The vertical dashed line in each panel marks the characteristic wavelength of that panel's process—the scintillator emission peak at 425 nm and the Y-11 emission peak at 476 nm (left), the WLS absorption onset at 486 nm (middle), and the SiPM PDE peak at 410 nm (right); the scintillator emission peak and the SiPM PDE peak therefore nearly coincide, whereas the WLS absorption onset and the Y-11 emission peak are red-shifted into the WLS band. Markers are the tabulated points; segments are the linear interpolation Geant4 applies.

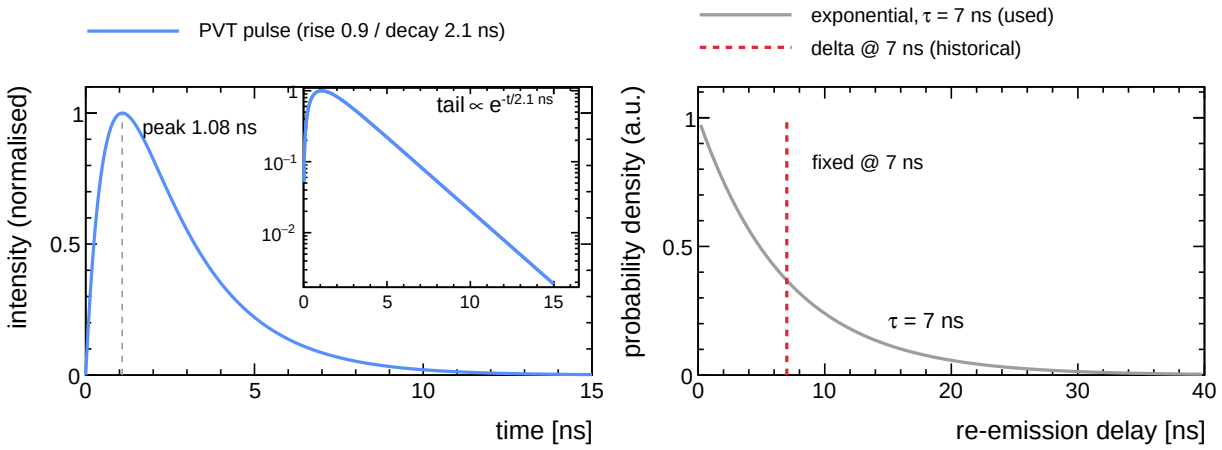



**Figure 5:** Time structure of the two optical sources. *Left:* the PVT scintillation pulse $f(t) \propto \left(1 - e^{-t/\tau_r}\right) e^{-t/\tau_d}$ with rise $\tau_r = 0.9\,\text{ns}$ and decay $\tau_d = 2.1\,\text{ns}$, normalised to its peak and shown on a linear scale; the dashed line marks the maximum at 1.08 ns. The inset (upper-right) replays the same pulse on a logarithmic ordinate, exposing the pure-exponential tail $e^{-t/\tau_d}$. *Right:* the Y-11 WLS re-emission probability density: exponential with $\tau = 7\,\text{ns}$ used in production (solid), compared with the historical fixed-delay profile at 7 ns (dashed). The corresponding spectral tables are in Fig. 4.

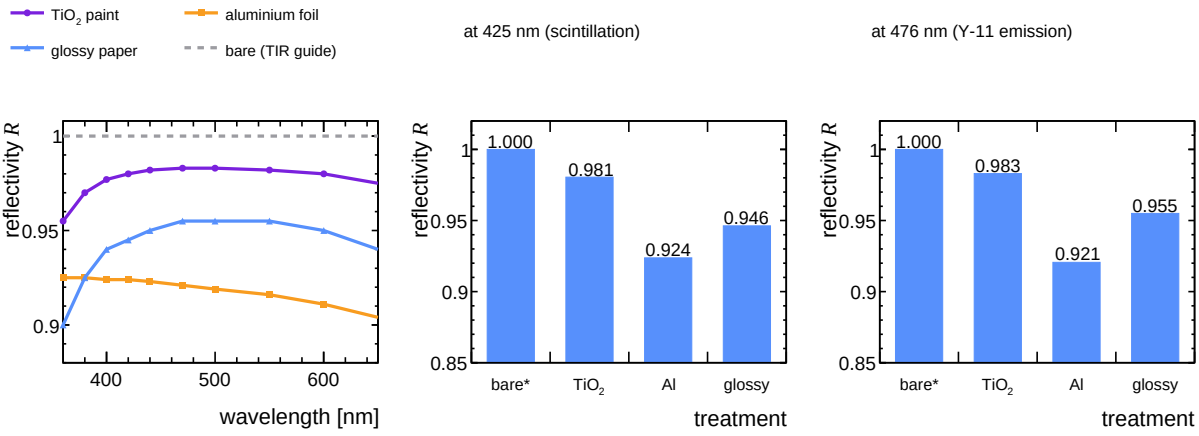



**Figure 6:** Reflector treatments. *Left:* tabulated reflectivity $R(\lambda)$ of the three reflective wrappers ($TiO_2$ paint, aluminium foil, high-gloss paper) on the shared 10-point grid, with the bare plate's lossless total-internal-reflection guide line. *Middle:* $R$ at the scintillation emission peak (425 nm). *Right:* $R$ at the Y-11 emission peak (476 nm), the wavelength of the config-4 re-emitted light. In both bar panels the bare plate is shown at unity as the TIR ceiling, not as a reflector.

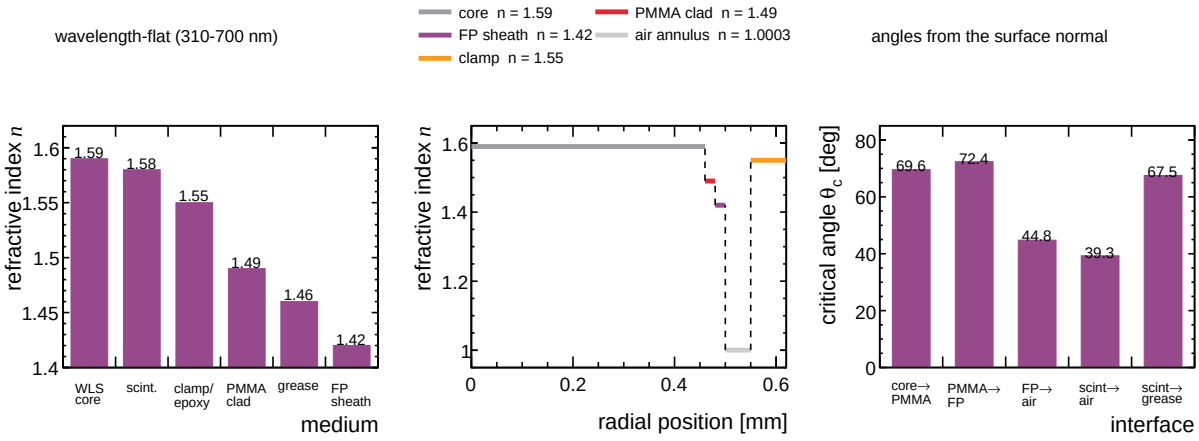



**Figure 7:** Refractive-index structure of the optical model. *Left:* the index ladder of the bulk media, all wavelength-flat across the visible—fibre core, scintillator, clamp/holder/epoxy, PMMA inner cladding, optical grease and fluoropolymer sheath. *Middle:* the radial index profile of the multi-clad Y-11 fibre from the core axis outward: core ($n = 1.59$), PMMA cladding ($n = 1.49$), fluoropolymer sheath ($n = 1.42$), the deliberate 0.05 mm air annulus, and the surrounding clamp ($n = 1.55$). *Right:* the critical angles $\theta_c = \sin^{-1}(n_2/n_1)$ of the successive layer pairs, measured from the interface normal. The large thresholds at the core–clad and clad–sheath boundaries are what sustain core–cladding total internal reflection, while the plate's air interface sets the usual escape cone.

### 3.7 Optical physics implementation

Optical photons are transported by the standard Geant4 optical physics module [4], with scintillation, Čerenkov, bulk absorption, Rayleigh scattering and boundary processes all active. Multiple scattering (Mie) is disabled; wavelength shifting (the `G4OpWLS` process) is enabled only for the config-4 fibre layout (Sec. 3.4) and inert for all others. The boundary physics of the Geant4 unified surface model, the `RINDEX` requirements it imposes, and the three code paths used by the four finishes are described in Appendix A, where they are verified line-by-line against the Geant4 source. This subsection states the two process-specific pieces of the model: the wavelength shifter and the photocathode.

### 3.8 Wavelength shifting

In the config-4 layout, photons that reach the fibre cores are absorbed and re-emitted isotropically at longer wavelength by the `G4OpWLS` process, which is configured through the fibre material's `WLSABSLENGTH`, `WLSCOMPONENT` and `WLSTIMECONSTANT` properties. Both spectra are the digitized Kuraray Y-11(200) curves: the absorption band peaks at 430 nm (onset $\approx$ 486 nm) and the re-emission peak is 476 nm (Fig. 4). The absolute absorption strength is set by the 430 nm absorption length, 1.0 mm in production (with a systematic band of 0.3 mm to 3 mm available through the `setWLSAbsLength` command, but not scanned here; see Sec. 11). The re-emission is sampled with an exponential time profile, $\tau = 7$ ns, rather than a fixed delay. `G4OpWLS` samples the secondary from `WLSCOMPONENT` subject to $E'_\gamma \leq E_\gamma$, so the emission table is cut at the absorption onset; a small overlap of the emission tail with the absorption band gives mild self-absorption. The process is switched on by the physics list when the WLS geometry is detected (the Geant4 optical-physics constructor reads the process activation at build time, so the flag is set before the base construction). Because most of the shifted emission lies red-ward of the absorption band, the re-emitted light is transported along the fibre by TIR to the read-out SiPM—which is why the detected config-4 spectrum is green-shifted (mean $\sim$ 510 nm) relative to the direct-coupled configurations.

### 3.9 Photodetection: the SiPM photocathode

Photodetection is delegated entirely to Geant4, rather than being drawn manually in the sensitive detector. The grease/SiPM boundary is a `dielectric_metal` surface whose MPT carries the SiPM `EFFICIENCY` as a function of photon energy (equivalently, of the wavelength $\lambda$), i.e. the photon detection efficiency (PDE) of an ASD-NUV4S-P-40 device [10], peaking at 0.431 near 410 nm (the digitized 25-point curve of Fig. 4; values fall to $\approx 0.30$ at 490 nm), with `REFLECTIVITY` $= 0$.

The mechanism is worth stating precisely because it is the reason the sensitive detector needs no random draw of its own. In `DielectricMetal()`, when the Fresnel–PDE roll places a photon in the "absorbed" channel, `DoAbsorption()` is called. Inside it:

$$f_{\text{status}} = \begin{cases} \text{Absorption}, & \xi \geq \text{EFFICIENCY}(\lambda), \\ \text{Detection}, & \xi < \text{EFFICIENCY}(\lambda), \end{cases} \qquad \xi \sim U(0,1), \tag{2}$$

where EFFICIENCY($\lambda$) is the tabulated PDE. The absorbed photon is assigned a non-zero `LocalEnergyDeposit` *only* when the PDE draw succeeds. Back in `PostStepDoIt`, if the status is `Detection` *and* the invoke-SD flag is set, the sensitive detector is invoked:

$$f_{\text{status}} = \text{Detection} \ \wedge \ f_{\text{InvokeSD}} \implies \text{InvokeSD(step)}. \tag{3}$$

The flag is enabled in the physics list via `G4OpticalParameters::SetBoundaryInvokeSD(true)`. Consequently the sensitive-detector `ProcessHits` fires *only* for genuine photoelectrons (it tests that the step energy deposit is positive), counts one photoelectron per call, and kills the photon (the SiPM is opaque). This is a clean separation of concerns: the physics of the photocathode lives in the optical surface, and the sensitive detector only books hits.

### 3.10 Per-event optical accounting

Two per-event counts recur throughout this report. Write $N_{\text{pe}}^{(e,s)}$ for the number of photoelectrons detected in SiPM $s$ during event $e$, and $N_{\gamma}^{(e)}$ for the number of optical photons generated in the slab during event $e$ (scintillation plus Čerenkov), irrespective of their later fate.

A thread-local diagnostic record (`OpticalDiag`) accumulates, per event: scintillation photons, Čerenkov photons, terminated photons, detected photoelectrons, and photons that escaped to the world. The primary muon's first-entry position in the slab is captured on the first step inside the scintillator logical volume and stored in slab-local coordinates. At end of event the sensitive detector writes one row per (event, SiPM), *including zero-detection rows*, so the sample is unbiased in the muon interaction position. Each row carries the entry position, the event's produced-photon count (the efficiency denominator), the detected count in that SiPM, the first arrival time, the mean and RMS detected wavelength, and the track weight. Three variable-length branches additionally list the individual photoelectrons: their global arrival times (`tDetected`), wavelengths (`wlDetected_nm`) and creating processes (`creatorDetected`, with 1 = `OpWLS`, 2 = scintillation, 3 = Čerenkov). The per-row count, timing and spectral data therefore support per-SiPM, combined and spatially-binned collection-efficiency analyses together with offline pulse-shape and process-mix studies.

Figure 8 shows a head-less event display of a single vertical muon in the glossy-wrapped plate (config 1). For legibility the display uses a 30 MeV muon—just below the Čerenkov threshold of the scintillator—with the scintillation yield rescaled, so that the individual optical tracks can be followed: photons are generated along the muon path, propagate by total internal reflection and specular reflection off the wrapper, and terminate on the SiPM patches at the four edges.

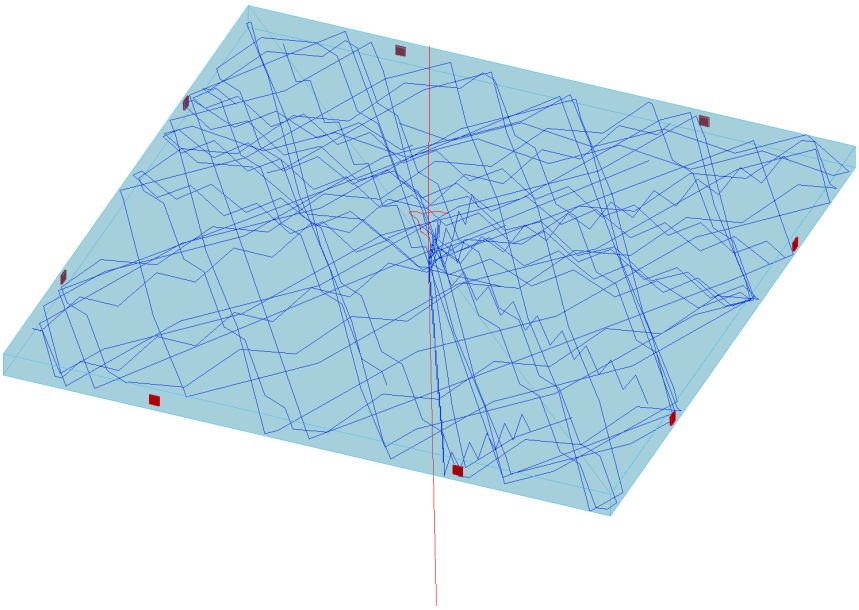


**Figure 8:** Head-less (`TSG_OFFSCREEN`) event display of one vertical muon in the glossy-wrapped plate with the config-1 layout, on a white background. The red line is the muon and the blue lines are optical photons (here purely scintillation, since the muon is below the Čerenkov threshold); the plate and its reflective wrapper are drawn as translucent surfaces with their edges outlined, and the SiPMs are opaque red. Both the muon energy (30 MeV, below the Čerenkov threshold) and the photon yield are chosen for visualisation only, so that individual tracks are resolved rather than merging into a saturated blob. The display is generated reproducibly by `macros/muon_vis.mac`.

## 4 Simulation campaigns and surface calibration

### 4.1 Beam, irradiation patches, and efficiency definition

The primary source is a vertical muon pencil beam: a 50 mm×50 mm square beam of 4 GeV $\mu^-$ normally incident on the plate, with the beam centre placed at three positions, each irradiating a 50 mm×50 mm patch lying *entirely on* the polished plate. With the plate spanning $[-125, 125]$ mm in both $x$ and $y$, the patch centres are

$$\text{centre} = (0, 0), \qquad \text{edge} = (0, -100), \qquad \text{corner} = (100, -100)\ \text{mm},$$

so the illuminated regions are $[-25, 25]^2$, $[-25, 25] \times [-125, -75]$ and $[75, 125] \times [-125, -75]$ respectively (report frame: $+y$ is the top, $-x$ the left). This places the edge and corner regions on the bottom ($-y$) edge, opposite the single instrumented face of config 3 (top, $+y$), and it matches the 50 mm×50 mm active area of the muon coincidence detector (MCD) that defines the regions of interest in Ref. [1]. All three patches have the same area, so the denominator of Eq. 4 is the same at all three positions and the three points of a curve are directly comparable. Each (config, reflector, position) runs 2500 events after a single `/run/initialize`. The matrix therefore comprises

$$5\ \text{configs} \times 4\ \text{reflectors} \times 3\ \text{positions} = 60\ \text{files}, \qquad 60 \times 2500 = 150\,000\ \text{generated events}.$$

Two focused calibration campaigns bracket the remaining surface inputs and are presented first. A bare-contact scan runs configs 1–3 at eleven contact fractions $f = 0, 0.005, \ldots, 0.050$ at the three beam positions, $3 \times 11 \times 3 = 99$ files with 1000 events each (99 000 events); an aluminium-backing scan runs configs 1–3 with `grease` and `air` backing at the three positions, $3 \times 2 \times 3 = 18$ files

with 1000 events each (18 000 events). The Al scan is taken from the earlier production campaign because the Al model is unchanged and that scan is complete; the contact scan is the new extended campaign. Together with the whole-plate run of Sec. 5 ($20 \times 25\,000 = 500\,000$ events), the campaign totals 767 000 events, of which 267 000 are matrix-style (matrix + contact + Al).

For Config 2 (mod) the corner patch is not entirely on the solid: the 12 mm chamfer removes a right triangle of 72 mm$^2$ from the $50 \times 50$ mm patch, i.e. 2.88 % of it (and 0.461 % of the whole plate, split equally over the four corners). A muon that lands in a removed triangle does not enter the scintillator and writes no `sipmHits` row. The efficiency of Eq. 4 is a ratio of detected to *produced* photons for events that do enter, so it is unaffected by this loss; yields quoted per generated event are 2.88 % low at the corner and 0.46 % low in the whole-plate run. Whole-plate detection probabilities use distinct event numbers, not row counts.

Production runs were executed on the HPC cluster. The optional per-slab optical track-length flux map is disabled for the matrix (it is retained as a separate diagnostic); the collection efficiency is reconstructed entirely offline from the `sipmHits` tree at any desired binning, so the map is not needed.

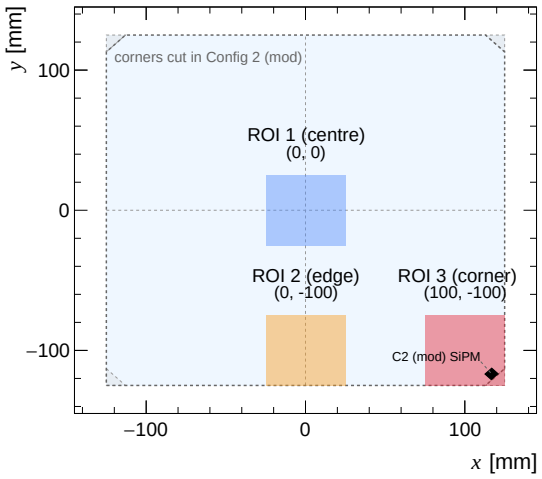



**Figure 9:** Plan view of the three irradiation sites (regions of interest) on the 250 mm×250 mm plate, in the report frame ($+y$ top, $-x$ left). Each coloured square is the 50 mm×50 mm footprint of the vertical muon beam: ROI 1 (centre, blue) at $(0, 0)$, ROI 2 (edge, orange) at $(0, -100)$, and ROI 3 (corner, red) at $(100, -100)$. The edge and corner sites lie on the bottom ($-y$) edge, opposite the single instrumented face of config 3.

The collection efficiency is defined, for a set $\mathcal{S}$ of SiPMs and an event $e$, as

$$\varepsilon = \frac{\sum_{e} \sum_{s \in \mathcal{S}} N_{\mathrm{pe}}^{(e,s)}}{\sum_{e} N_{\gamma}^{(e)}}, \tag{4}$$

where the outer sum runs over all simulated events and the inner sum over the SiPM set $\mathcal{S}$. The all-SiPM sum over the three beam positions is the per-position figure of merit. A *plate-averaged* efficiency is the appropriate global figure of merit, but the three patches sample only part of the plate; it is therefore obtained from the uniform whole-plate irradiation of Sec. 5 and reported there.

For presentation, all position-resolved results (the maps of Fig. 9 and the whole-slab maps of Sec. 6) are shown in the report frame with the top edge at $+y$, the bottom at $-y$, the left at $-x$ and the right at $+x$. The internal simulation frame is this view rotated by 90° clockwise; the primary muon entry points and the SiPM markers are mapped into the report frame by

$(x, y) \to (y, -x)$ before plotting. This rotation is a rigid change of view and leaves every scalar result (yields, spectra, efficiencies) unchanged; it only fixes the orientation of config 3 (top edge) and of the edge/corner irradiation sites (bottom edge).

The optical measurements do not fix two remaining surface inputs: the effective bare-holder contact fraction $f$ and the aluminium backing. We determine both before presenting any production result, so that every matrix and whole-slab yield below uses one consistent nominal surface model. Both calibrations use the same beam patches and efficiency definition just described.

### 4.2 Bare-plate holder contact

The clean bare model assumes a 1.2 mm air gap between the polished plate and the black holder. A real clamped plate touches the holder at scattered high spots, and each contact frustrates total internal reflection and removes trapped light. To bracket this unmeasured loss channel we repeat the three-patch scan for a mean-field contact fraction $f$: every hit on a bare face is absorbed with probability $f$ and otherwise follows the normal Fresnel/TIR path, implemented as a polished `dielectric_dielectric` skin with `REFLECTIVITY` $= 1 - f$ and `TRANSMITTANCE` $= 0$ (Sec. 3.3.1). The extended scan covers configs 1–3, the three beam positions and eleven fractions $f = 0$, 0.005, …, 0.050, with 1000 events per case (99 files, 99 000 events). It is an effective area fraction, not a measurement of the holder gap.

Figure 10 shows the absolute yield versus $f$, with the matrix $TiO_2$ reference drawn as dashed lines, and the normalised centre yield. At $f = 0$ the config-1 bare plate collects 304.95, 295.37 and 288.55 $N_{pe}$/event at the centre, edge and corner; the corresponding config-2 values are 160.21, 153.68 and 152.25, and the config-3 values 81.27, 79.20 and 80.23. A 1% contact fraction already removes about half the light: at the config-1 centre the yield falls to 155.01 $N_{pe}$/event, and at the nominal $f = 0.045$ to 74.37. The loss is therefore strongly non-linear in the first few percent of contact area, as expected when a small fraction of the surface provides a fast escape path for the trapped mode volume.

The nominal value is chosen from the crossings themselves, listed in Table 5. At the centre the crossing is remarkably stable across layouts, $f = 0.0167$–$0.0172$ for configs 1–3. At the edge and corner the required fraction drops to 0.0034–0.0088 in the four-sided layouts, where the diffuse $TiO_2$ reference is bright, while in the single-sided config 3 it rises to 0.0387 (edge) and 0.0408 (corner), because the $TiO_2$ edge and corner patches there are the dimmest of the three positions. No single $f$ matches every cell exactly; the production nominal $f = 0.045$ is the smallest sampled fraction that places all nine cells below $TiO_2$, at the cost of over-suppressing the four-sided centre. At that value the nine bare yields are 74.37/64.42/63.25 (cfg 1), 37.60/32.35/32.04 (cfg 2) and 19.22/16.32/16.04 (cfg 3) for centre/edge/corner. The same global $f$ thus matches the ordering in every layout and position; we retain $f = 0$ as the clean-air reference and lower bound on the loss.

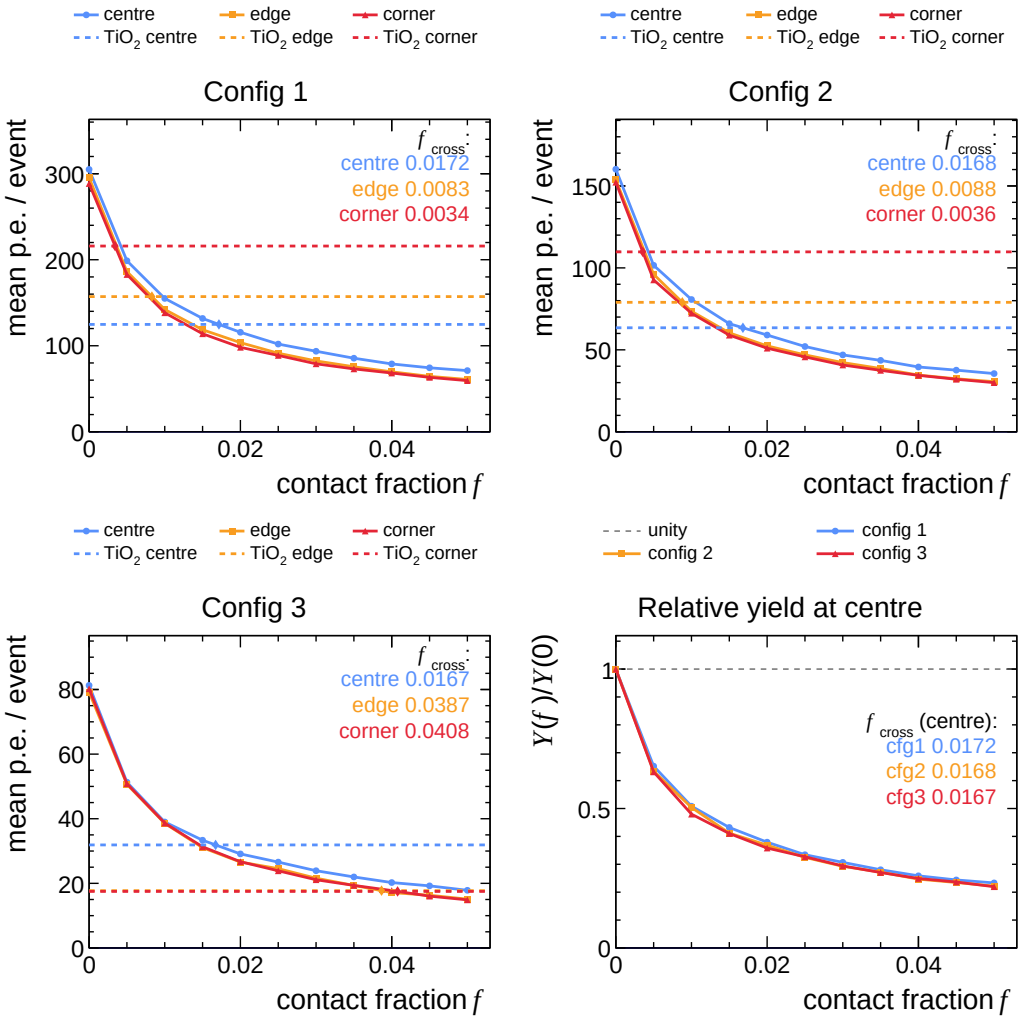



**Figure 10:** Bare-plate contact-fraction scan. The first three panels show the mean photoelectron yield versus contact fraction $f$ for configs 1–3, with the centre, edge and corner patches as separate curves and the corresponding matrix $TiO_2$ reference as a dashed line in the same colour. A full diamond marks the interpolated crossing where the bare yield falls below $TiO_2$; the crossing fractions are listed, colour-matched to the curves, in the empty upper-right corner of each of the first three panels. The bottom-right panel shows the centre yield normalised to $f = 0$, with the centre crossing fractions of configs 1–3 listed in the region between the unity line and the curves. The contact model is a mean-field per-hit loss ($R = 1 - f$, $T = 0$), so $f$ is an effective area fraction, not a measured holder contact area.

Table 4 lists the config-1 centre scan in detail, with the signed difference from the matrix $TiO_2$ reference of 124.79 $N_{pe}$/event.

**Table 4:** Config-1 centre contact-fraction scan. $N_{\mathrm{pe}}$ is the mean photoelectron yield per event with its statistical uncertainty, $Y(f)/Y(0)$ is normalised to the air-gap value, and $\Delta$ is the signed difference from the matrix $TiO_2$ reference (124.79 pe/event). The production nominal is $f = 0.045$.

| $f$ | $N_{\mathrm{pe}}$ | $Y(f)/Y(0)$ | $\Delta$ (pe) |
|---|---|---|---|
| 0.000 | $304.95 \pm 2.75$ | 1.000 | +180.16 |
| 0.005 | $198.78 \pm 1.74$ | 0.652 | +73.99 |
| 0.010 | $155.01 \pm 1.47$ | 0.508 | +30.21 |
| 0.015 | $131.75 \pm 1.18$ | 0.432 | +6.95 |
| 0.020 | $115.67 \pm 1.09$ | 0.379 | −9.13 |
| 0.025 | $101.94 \pm 0.83$ | 0.334 | −22.85 |
| 0.030 | $93.61 \pm 0.80$ | 0.307 | −31.18 |
| 0.035 | $85.51 \pm 0.77$ | 0.280 | −39.28 |
| 0.040 | $78.87 \pm 0.71$ | 0.259 | −45.92 |
| 0.045 | $74.37 \pm 0.61$ | 0.244 | −50.43 |
| 0.050 | $71.12 \pm 0.68$ | 0.233 | −53.67 |

**Table 5:** Interpolated contact fraction $f_{\mathrm{cross}}$ at which the bare yield falls below the matrix $TiO_2$ reference, for each layout and beam position, and the bare yield at the production nominal $f = 0.045$. The $TiO_2$ reference is the v6p5 matrix value (Sec. 5).

| Config | Position | Bare at $f = 0$ | $TiO_2$ | $f_{\mathrm{cross}}$ | Bare at 0.045 |
|---|---|---|---|---|---|
| 1 | centre | 304.95 | 124.79 | 0.0172 | 74.37 |
| 1 | edge | 295.37 | 157.14 | 0.0083 | 64.42 |
| 1 | corner | 288.55 | 215.91 | 0.0034 | 63.25 |
| 2 | centre | 160.21 | 63.46 | 0.0168 | 37.60 |
| 2 | edge | 153.68 | 78.99 | 0.0088 | 32.35 |
| 2 | corner | 152.25 | 109.78 | 0.0036 | 32.04 |
| 3 | centre | 81.27 | 31.89 | 0.0167 | 19.22 |
| 3 | edge | 79.20 | 17.74 | 0.0387 | 16.32 |
| 3 | corner | 80.23 | 17.50 | 0.0408 | 16.04 |

### 4.3 Aluminium backing: grease versus air

The aluminium foil is the one wrapper whose optical contact is explicitly ambiguous in the reference construction: grease is applied in places, but wrinkles and trapped air leave other regions decoupled. The production model uses the `air` backing ($n = 1.0003$, critical angle 39.3° at the scintillator), which leaves the full TIR cone intact, so only the sub-critical fraction reaches the foil. The alternative `grease` backing ($n = 1.46$, critical angle 67.5°) lets most trapped light refract into the grease and return specularly from the foil; it is retained as the lower-bound systematic. Both use the same tabulated aluminium reflectance ($R = 0.904$–$0.925$). The backing scan covers configs 1–3 at the three positions, with 1000 events per case, using `/dcs-monitor/det/muonScint/setAlBacking air|grease`. It is taken from the earlier complete production campaign because the Al model is unchanged; the v6p5 matrix air-backed centre value (482.23 pe/event) agrees with the v5 scan value (480.05) to better than 0.5 %.

Figure 11 and Table 6 show the result. Air backing raises the aluminium yield by a factor 2.38–2.59 depending on layout and position. At the config-1 centre the foil goes from 201.92 to 480.05 pe/event, at the config-2 centre from 102.51 to 254.57, and at the config-3 centre from 51.98 to 127.90. The air-backed foil reaches 92.2 %, 92.5 % and 90.9 % of the glossy yield from the production matrix (Sec. 5) in those three cases, i.e. it recovers the measured near-equality of aluminium and glossy paper. The grease-backed branch is roughly a factor 2.4 lower—about 37 %–39 % of the glossy yield—and would put the foil below the clean-air ($f = 0$) bare plate, so the backing choice is the dominant Al systematic. The enhancement is slightly larger at the

edge and corner than at the centre for config 3, but the position dependence within each backing remains weak.

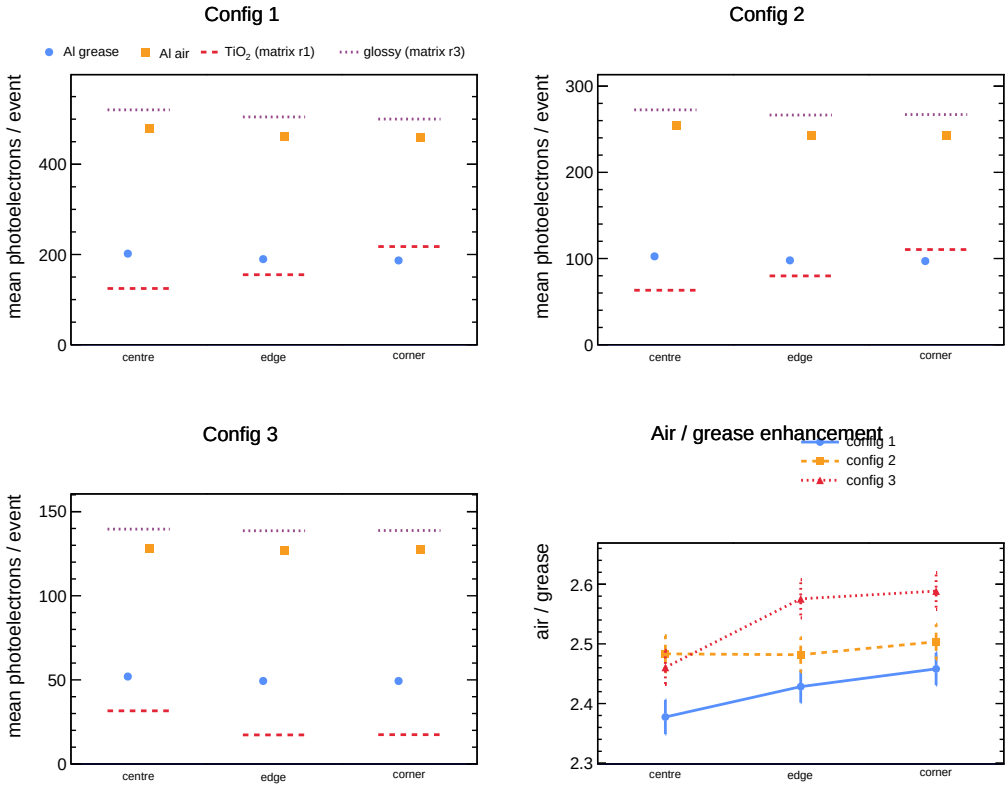



**Figure 11:** Aluminium backing scan. The first three panels compare the grease and air backings at the three beam positions for configs 1–3, with the matrix $TiO_2$ and glossy references shown for orientation; the bottom-right panel shows the air/grease enhancement ratio. The backing index changes the critical angle, not the tabulated aluminium reflectance, so the difference is entirely due to whether the plate retains its full TIR cone.

**Table 6:** Aluminium yield for the grease and air backings, and the air/grease ratio, for configs 1–3 and the three beam positions (1000 events per case). The production campaign uses the air backing; the grease column is the lower-bound systematic. The scan is from the earlier complete Al campaign (the Al model is unchanged); the v6p5 air matrix centre agrees with it to better than 0.5 %.

| Config | Position | Grease (pe) | Air (pe) | Air/grease |
|---|---|---|---|---|
| 1 | centre | $201.92 \pm 1.79$ | $480.05 \pm 3.94$ | $2.377 \pm 0.029$ |
| 1 | edge | $189.72 \pm 1.58$ | $460.71 \pm 3.39$ | $2.428 \pm 0.027$ |
| 1 | corner | $186.80 \pm 1.45$ | $459.18 \pm 3.67$ | $2.458 \pm 0.027$ |
| 2 | centre | $102.51 \pm 0.90$ | $254.57 \pm 2.16$ | $2.483 \pm 0.030$ |
| 2 | edge | $97.85 \pm 0.86$ | $242.85 \pm 1.86$ | $2.482 \pm 0.029$ |
| 2 | corner | $97.06 \pm 0.86$ | $243.00 \pm 1.87$ | $2.504 \pm 0.029$ |
| 3 | centre | $51.98 \pm 0.45$ | $127.90 \pm 1.00$ | $2.461 \pm 0.029$ |
| 3 | edge | $49.35 \pm 0.46$ | $127.10 \pm 1.04$ | $2.575 \pm 0.032$ |
| 3 | corner | $49.34 \pm 0.44$ | $127.71 \pm 0.99$ | $2.588 \pm 0.031$ |

The two backings bracket the as-built foil: uniform grease is the lower bound and a perfectly trapped air layer the upper bound. The air-backed result is consistent with the reference measurement's near-equality of aluminium and glossy paper. Together with the contact scan, the calibration fixes the production surface model: $f = 0.045$ for the bare plate and the air backing

for aluminium. Every matrix and whole-slab result in Secs. 5 and 6 uses these nominal values; $f = 0$ and grease are retained only as systematic bounds.


## 5 Light collection: yield and the wrapper ordering

With the surface model fixed at $f = 0.045$ and air-backed aluminium, we now present the production results.

### 5.1 The three-patch matrix scan

Figure 12a shows the per-event optical-photon yield (the denominator of Eq. 4) for the four reflectors. The mean yield is essentially independent of the reflector—about 19 600 photons per event—which is the correct physical behaviour: the reflector changes how photons are transported, not how many are produced. The small spread reflects event-to-event variation in the muon path length.

Figure 12b shows the corresponding photoelectron spectra. Here the reflector has a clear effect: at the config-1 centre the calibrated model gives 74.3 $N_{\mathrm{pe}}$/event for the contact-limited bare plate, 124.8 $N_{\mathrm{pe}}$/event for $TiO_2$, 482.2 $N_{\mathrm{pe}}$/event for air-backed aluminium and 520.7 $N_{\mathrm{pe}}$/event for glossy paper. The ordering is bare $<$ $TiO_2$ $<$ Al $<$ glossy, with the air-backed foil close to glossy paper. The bare curve is therefore a broad, low-occupancy distribution rather than the full-cone TIR distribution obtained at $f = 0$, which still loses the whole sub-critical fraction at the black wall; the difference is the contact-loss systematic of Sec. 4.2.

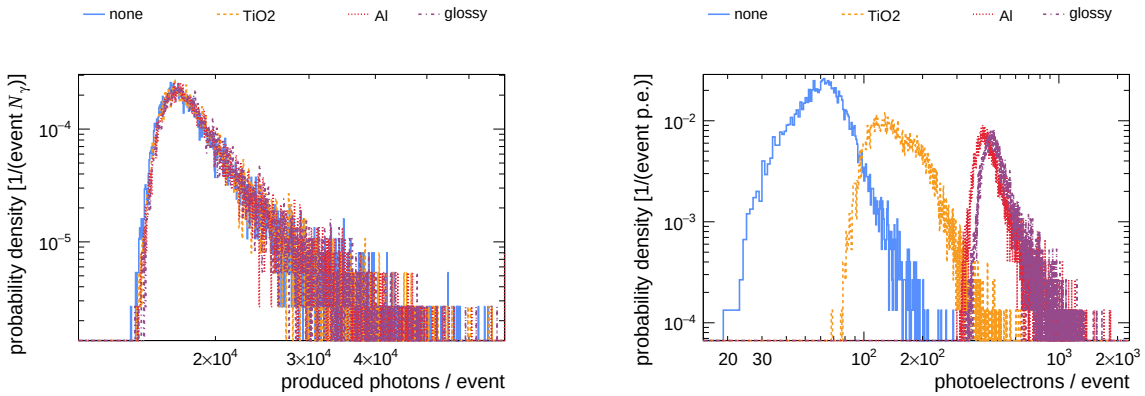


**(a)** Yield (produced photons/event). **(b)** Photoelectrons/event.

**Figure 12:** Per-event distributions for config 1, plotted as a probability density (unit area, 1 event per unit of the abscissa) with logarithmic $x$- and $y$-axes. The production yield (left) is reflector-independent, as it must be; the detected photoelectron count (right) depends strongly on the wrapper. The log $y$-axis is needed because the four curves have the same event count but very different widths and heights: the narrow, low-occupancy $TiO_2$ distribution and the broad, high-occupancy bare and glossy distributions cannot both be resolved on a linear scale.

The efficiency scale is set by the SiPM PDE and the coupling: of order 19 600 photons are produced and the best wrapper delivers $\approx$ 521 photoelectrons, i.e. $\approx$ 2.65%. Given a PDE of $\sim$0.4 and the geometric acceptance of a side-mounted sensor, this is consistent.

The three irradiation patches separate the response by position, and the tempting single-coordinate summary is the distance $r$ of the patch from the plate centre, but $r$ is blind to azimuth, and the shortcoming is decisive here: configs 3 and 4 instrument a *single* face, so the collection depends on the *direction* from which the plate is irradiated, not merely on the distance. All three patches also lie on the half of the plate opposite the instrumented face of the single-sided layouts, so their distances are not even monotonic in the proximity to a sensor. We therefore keep the three patches separate and compare them directly.

Figure 13 groups the three patches by layout (one panel per config, four reflector curves) and Fig. 14 groups them by reflector (one panel per wrapper, five layout curves). The conspicuous feature is that the specular wrappers are nearly *flat* across the three patches in the four Table IV layouts: there the maximum/minimum patch ratio spans 1.0 % to 4.2 % for aluminium and 0.8 % to 3.6 % for glossy paper. Config 2 (mod) is the exception, because its corner patch sits next to an instrumented chamfer; including it, the ratios reach 20.5 % (Al) and 17.3 % (glossy). The diffuse $TiO_2$ paint is the opposite extreme, varying by 74.9 % to 257.9 % (a factor 1.75–3.58). The contact-limited bare plate lies between them: 8.3 % to 164.8 %, with the four-sided layouts 1 and 2 and config 3 near 17 %, config 4 at 8.3 %, and the corner-cut layout at 164.8 %.

The *sign* of the position trend is wrapper- and layout-dependent, and this is the first place where the simulation and the measurement part company. For the bare plate, aluminium and glossy paper the three-patch ordering is centre > edge > corner in the four Table IV layouts, i.e. the corner is the dimmest patch, exactly as reported in Ref. [1]. For the diffuse $TiO_2$ paint the trend is *reversed* in the four-sided layouts 1 and 2 (corner > edge > centre, a factor $\approx$1.75), while in the single-sided layouts 3 and 4 the centre is again the brightest patch. Config 2 (mod) is a deliberate exception to the paper's corner rule: its corner beam lands beside an instrumented chamfer, and the corner is therefore the brightest patch for *every* wrapper (corner/centre ratios 2.65 bare, 3.58 $TiO_2$, 1.21 Al and 1.17 glossy). The mechanism behind the $TiO_2$ reversal is discussed in Sec. 5.3; it is the same mechanism that sets the uniformity of the full-plate maps and the ability of the SiPM pattern to localise the muon.

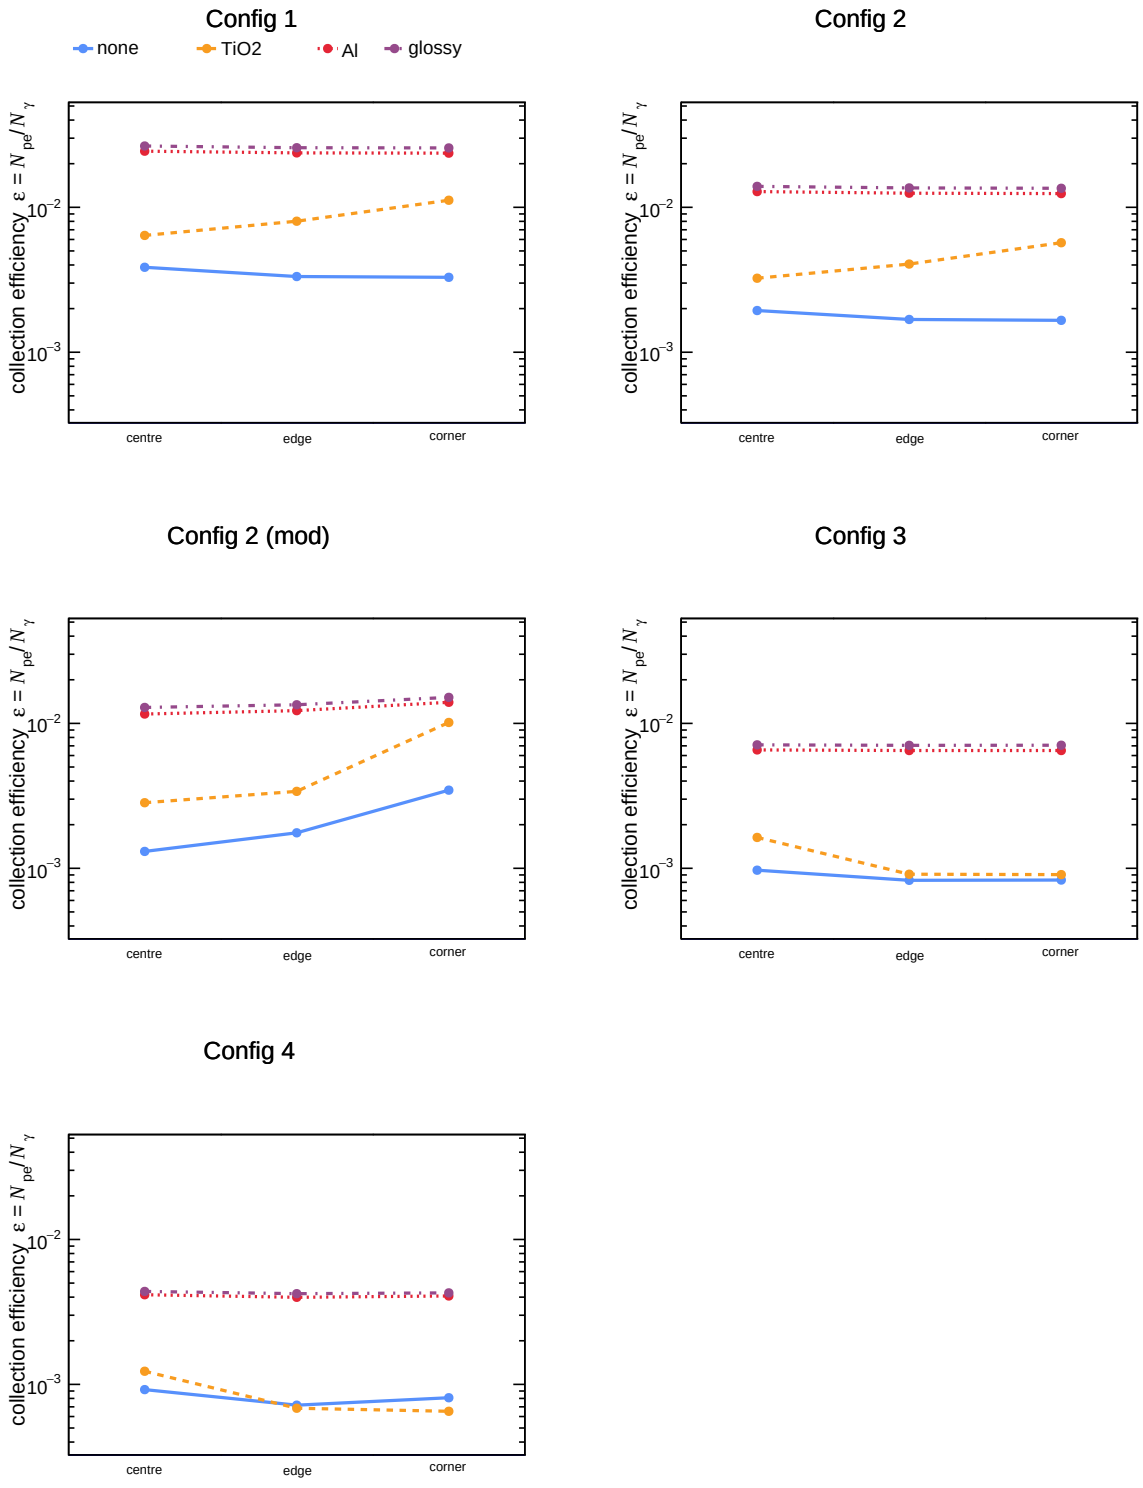



**Figure 13:** Collection efficiency at the three irradiation patches (centre, edge, corner), one panel per detector layout, with the four reflector curves (logarithmic $y$-axis). All three patches have equal area and lie fully on the plate, so the points are directly comparable; the one exception is the corner patch of Config 2 (mod), 2.88 % of which falls outside the chamfered solid (the efficiencies themselves are normalised to entering muons). Aluminium and glossy paper are nearly flat across the three patches in the four Table IV layouts; the contact-limited bare plate varies by up to 18 % there, and the diffuse $TiO_2$ paint shows by far the strongest position dependence. In Config 2 (mod) the corner is the brightest patch for every wrapper because it is next to an instrumented chamfer.

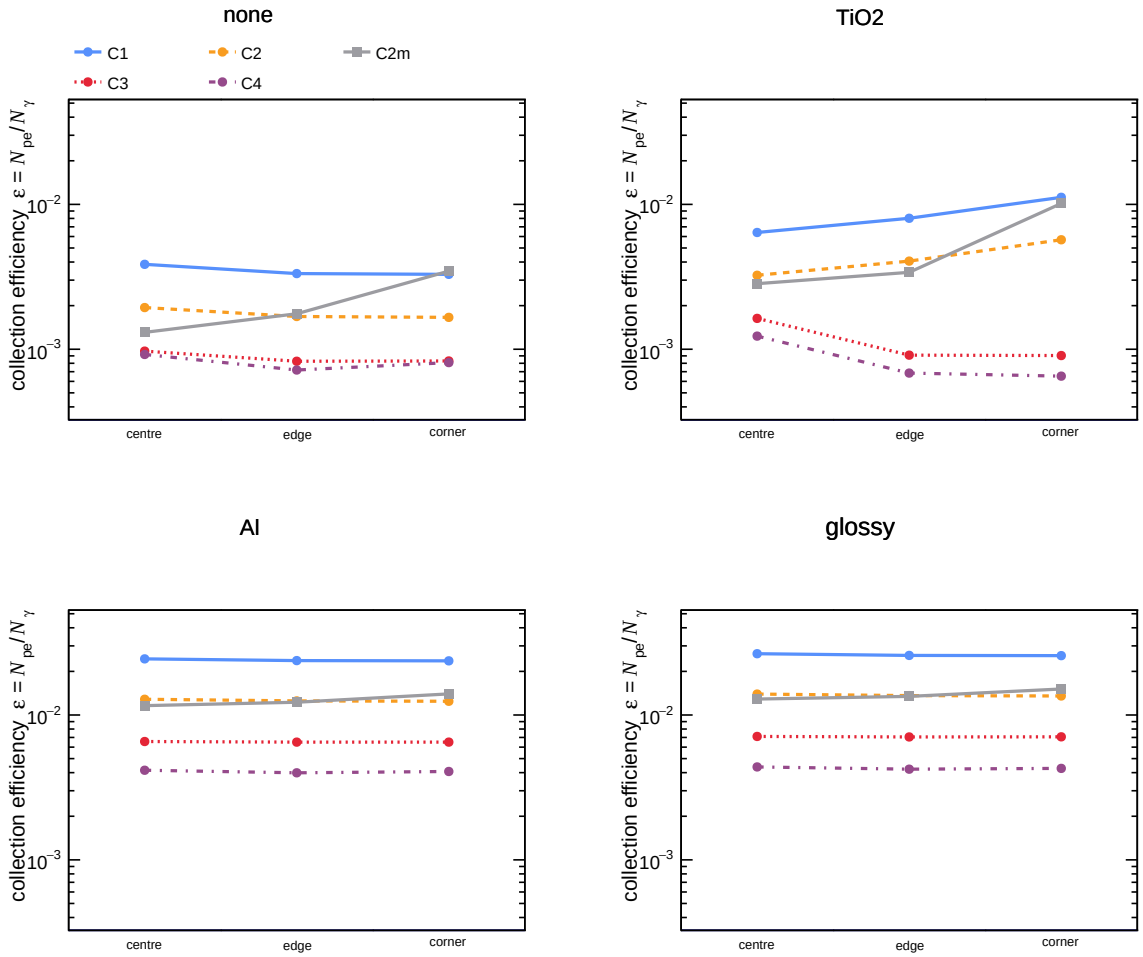



**Figure 14:** The same data grouped by reflector (one panel per wrapper), with the five layouts as curves. Aluminium and glossy paper are nearly flat in the four Table IV layouts, while the contact-limited bare plate varies by up to 18 %. The diffuse $TiO_2$ paint varies by a factor $\approx 1.75$ in the four-sided layouts (corner highest); in the single-sided layouts (3 and 4) it drops from centre toward the edge and corner patches, which sit on the far side of the plate from its sensors. In Config 2 (mod) all four wrappers rise towards the corner patch, because that patch lies beside an instrumented chamfer.

Figure 15 resolves the directional response most directly. For config 1 (the layout with the most sensors) it shows the *share* of the collected light seen by each of the eight sensors, in one panel per reflector, with the three irradiation patches as grouped bars (dashed line: the uniform expectation of 1/8). The difference between the wrappers is instructive. Glossy paper and aluminium spread the light almost uniformly: at the corner patch the largest and smallest single-sensor shares differ by only 1.23 and 1.23. The diffuse $TiO_2$ paint concentrates it strongly: the largest and smallest shares differ by a factor 11.20, and the two sensors on the faces bordering the illuminated corner together collect 73.6 % of the photoelectrons (about three times the uniform share each), while the remaining six share the rest. The contact-limited bare plate is intermediate (5.35), a direct consequence of the position-dependent holder-loss model. The total efficiency still varies only modestly across the three patches for Al and glossy (Table 7), so the cavity keeps the *amount* of collected light nearly constant while rearranging its spatial division. A radius-only summary averages these distinct per-sensor patterns into a single number and hides precisely this information.

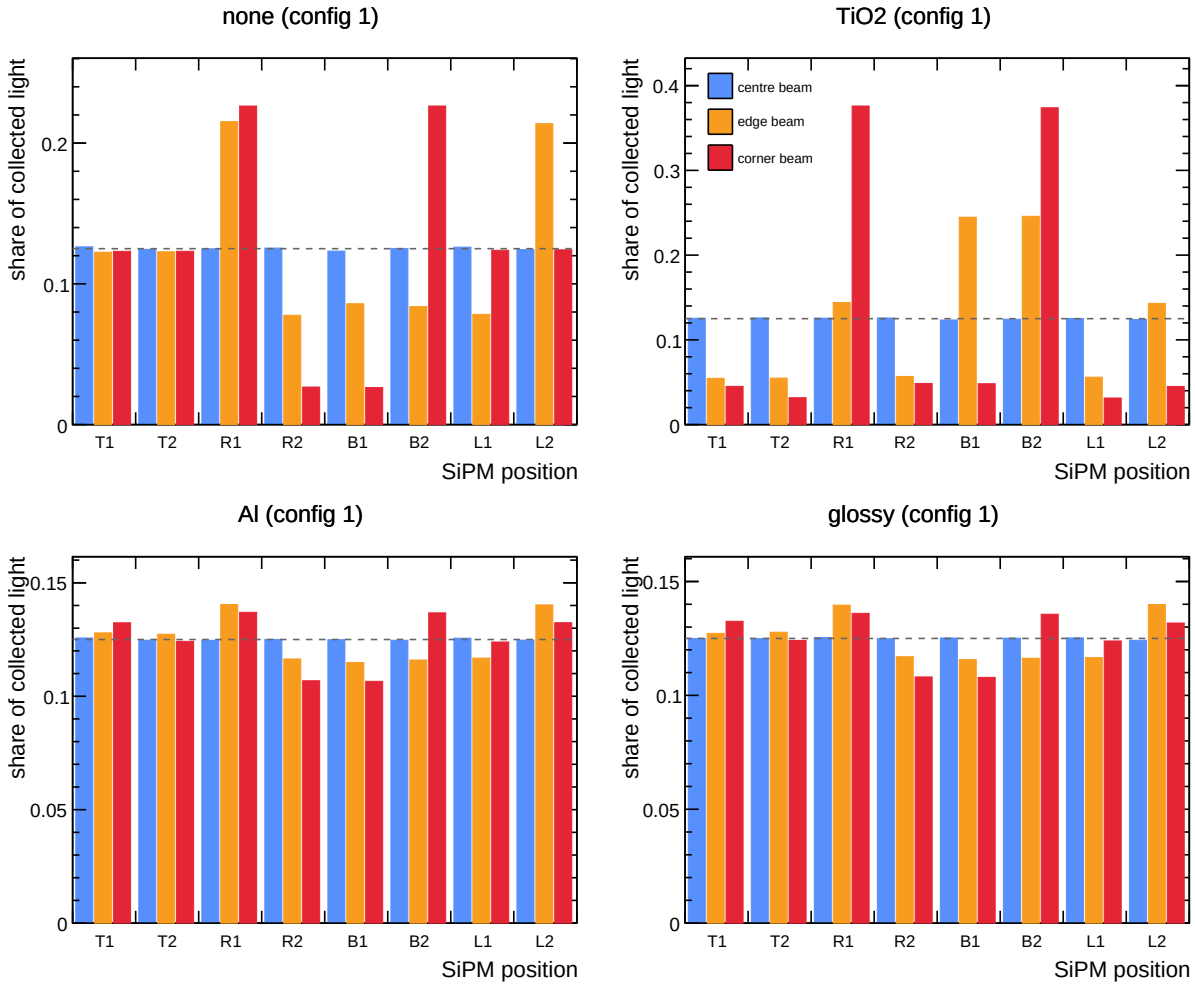



**Figure 15:** Direction-aware light sharing, config 1, one panel per reflector. Each group of bars is one sensor (x axis) and the three colours are the irradiation patches (blue: centre, orange: edge, red: corner); the height is that sensor's share of the light collected at that patch, and the dashed line marks the uniform expectation 1/8. Glossy paper and aluminium spread the light almost uniformly over all eight sensors (corner max/min 1.23 and 1.23), the contact-limited bare plate is intermediate (5.35), whereas the diffuse $TiO_2$ paint concentrates it on the two sensors nearest the beam (corner max/min 11.20).

Table 7 lists the absolute centre/edge/corner efficiencies for config 1; the fully position- and direction-resolved maps over the *entire* plate are given in Sec. 6.

**Table 7:** Position dependence of the collection efficiency, config 1 (all SiPMs). Each beam patch is 50 mm×50 mm and lies fully on the plate, so the produced-photon denominators are equal.

| Reflector | Centre | Edge | Corner |
|---|---|---|---|
| Bare | $3.857 \times 10^{-3}$ | $3.329 \times 10^{-3}$ | $3.288 \times 10^{-3}$ |
| $TiO_2$ | $6.398 \times 10^{-3}$ | $8.019 \times 10^{-3}$ | $1.119 \times 10^{-2}$ |
| Al | $2.440 \times 10^{-2}$ | $2.374 \times 10^{-2}$ | $2.365 \times 10^{-2}$ |
| Glossy | $2.649 \times 10^{-2}$ | $2.578 \times 10^{-2}$ | $2.569 \times 10^{-2}$ |

Figure 16 collects the per-event photoelectron spectra over the whole matrix scan in the layout of Fig. 10 of Rao et al. [1]: the three irradiation regions (centre, edge, corner) are the rows and the five detector configurations are the columns, in the order C1, C2, C2m, C3, C4, with the four reflector treatments overlaid in every cell. Two adaptations are made. First, the voltage pulse-height spectra of the measurement are replaced by the simulation's number of photoelectrons per event, the quantity that is directly comparable between our model and the experiment. Second,

the WLS-clamp configuration and Config 2 (mod) are added as extra columns, so that all five layouts appear in one figure on a common logarithmic axis (panel (b)) rather than in separate figures.

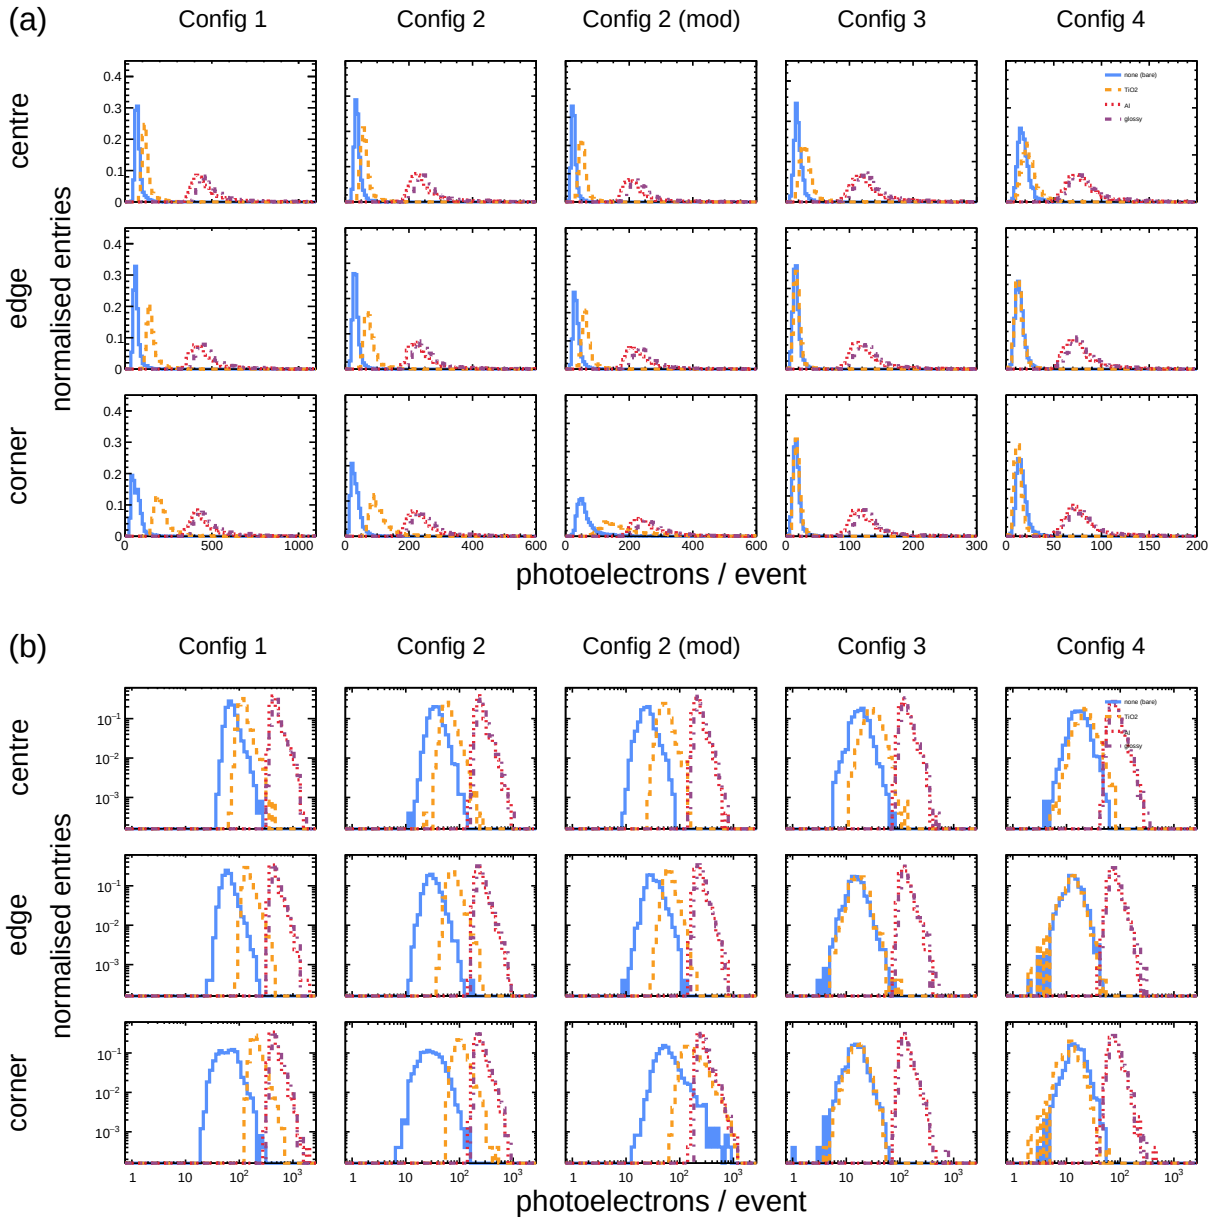



**Figure 16:** Photoelectron spectra in the layout of Fig. 10 of Rao et al. [1]: rows are the irradiation regions (centre, edge, corner) and columns the detector configurations in the order C1, C2, C2m, C3, C4 (C2m is Config 2 (mod); the WLS-clamp layout is the last column). Each cell overlays the four reflector treatments. The histograms are normalised entry distributions (each cell is scaled so its entries sum to unity). The *upper* grid (a) uses linear axes and the *lower* grid (b) logarithmic axes; both share the same reflector colours and styles and the same units. Panel (a) gives each column its own linear abscissa, truncated at that configuration's 99.5th percentile (rounded up) and binned linearly, so that the narrow high-density core of every layout is resolved. A single shared linear abscissa would instead collapse the WLS-clamp layout (config 4), which collects roughly an order of magnitude fewer photoelectrons than the direct-coupled layouts, into the first few percent of the axis. Panel (b) shows every cell over its full distribution on a single shared logarithmic abscissa with logarithmic bins, so the five layouts remain directly comparable there. Zero-photoelectron events form a pulse below threshold and lie off the abscissa. The wrappers shift and broaden the spectrum from the low, contact-limited bare distribution through $TiO_2$ and air-backed Al to the wide, bright glossy one; in the four Table IV layouts, apart from $TiO_2$ and the bare plate, the spectra vary by at most 3.4 % across positions.

The figure condenses the trends established above. At the config-1 centre the mean yields are 74.3, 124.8, 482.2 and 520.7 pe/event for bare, $TiO_2$, Al and glossy, so the calibrated ordering bare $<$ $TiO_2$ $<$ Al $<$ glossy holds in every direct-coupled cell, with the contact-limited bare plate

the lowest and glossy the highest. The position dependence is wrapper-specific: for the diffuse $TiO_2$ paint the corner spectrum is shifted highest in the four-sided layouts (a factor $\approx 1.75$ in the mean, configurations 1 and 2, and 3.58 in the corner-cut layout) but the centre is highest in the single-sided layouts 3 and 4. In the four Table IV layouts, aluminium and glossy paper vary by at most 4.2 % across positions, whereas the contact-limited bare plate varies by up to 17.5 %; in Config 2 (mod) the corner is brightest for all four wrappers and the variation reaches 21 % (Al), 17 % (glossy) and 165 % (bare). This is the same reflector-versus-position interplay summarised in Table 7 and the efficiency maps, presented here as the pulse-height distributions that a threshold-based read-out would actually see.

### 5.2 The whole-plate average

The matrix scan pools only three 50 mm×50 mm patches, all on the $-y$ half of the plate, so the efficiency it yields depends on the choice of patches and is *not* a plate average. The whole-slab run removes that bias: the GPS plane is expanded to $250 \times 250$ mm (`halfx` = `halfy` = 125 mm) and 25 000 events are generated per (config, reflector), so the primary muon's first-entry position is sampled *uniformly* over the entire plate and the pooled ratio $\sum N_{\mathrm{pe}} / \sum N_{\gamma}$ is the *plate-averaged* collection efficiency—the appropriate global figure of merit. Figure 17 shows it for every (config, reflector) pair, and Table 8 lists the numbers.

With the calibrated surfaces every layout reproduces the measured ordering,

$$\text{bare} < \mathrm{TiO_2} < \mathrm{Al} < \text{glossy} \quad \text{(all five layouts)},$$

with glossy paper the brightest wrapper in every layout and air-backed aluminium within 92 % of its yield in the four Table IV layouts (95 % in config 4, 91 % in Config 2 (mod)). The contact-limited bare plate is now the weakest wrapper in every layout, as the experiment finds. The spread from weakest to brightest is a factor 6.5–6.9 in the four directly-coupled layouts, set mainly by the bare contact loss, and 4.5 in config 4. The efficiency scales roughly with the photosensitive area: the eight-SiPM layout (config 1, $\varepsilon = 4.081 \times 10^{-3}$) is highest, four SiPMs on four faces (config 2, $2.068 \times 10^{-3}$) roughly halve it, and concentrating the two sensors of config 3 on a single face ($1.048 \times 10^{-3}$) halves it again. Config 2 (mod) has the same four sensors and active area as config 2, but its sensors sit at the corners, farther from most of the plate, and the cut removes 0.46 % of the area; it reaches $1.993 \times 10^{-3}$, 3.6 % below config 2. Re-aiming the sensors at the plate centre therefore does not recover the light sharing that the side-mounted layout lacks. The single-SiPM WLS-fibre layout (config 4, $1.007 \times 10^{-3}$) is comparable to config 3: it is lower for $TiO_2$, Al and glossy by 20 %–40 %, and now slightly lower for the bare plate as well (1.007 versus $1.048 \times 10^{-3}$).

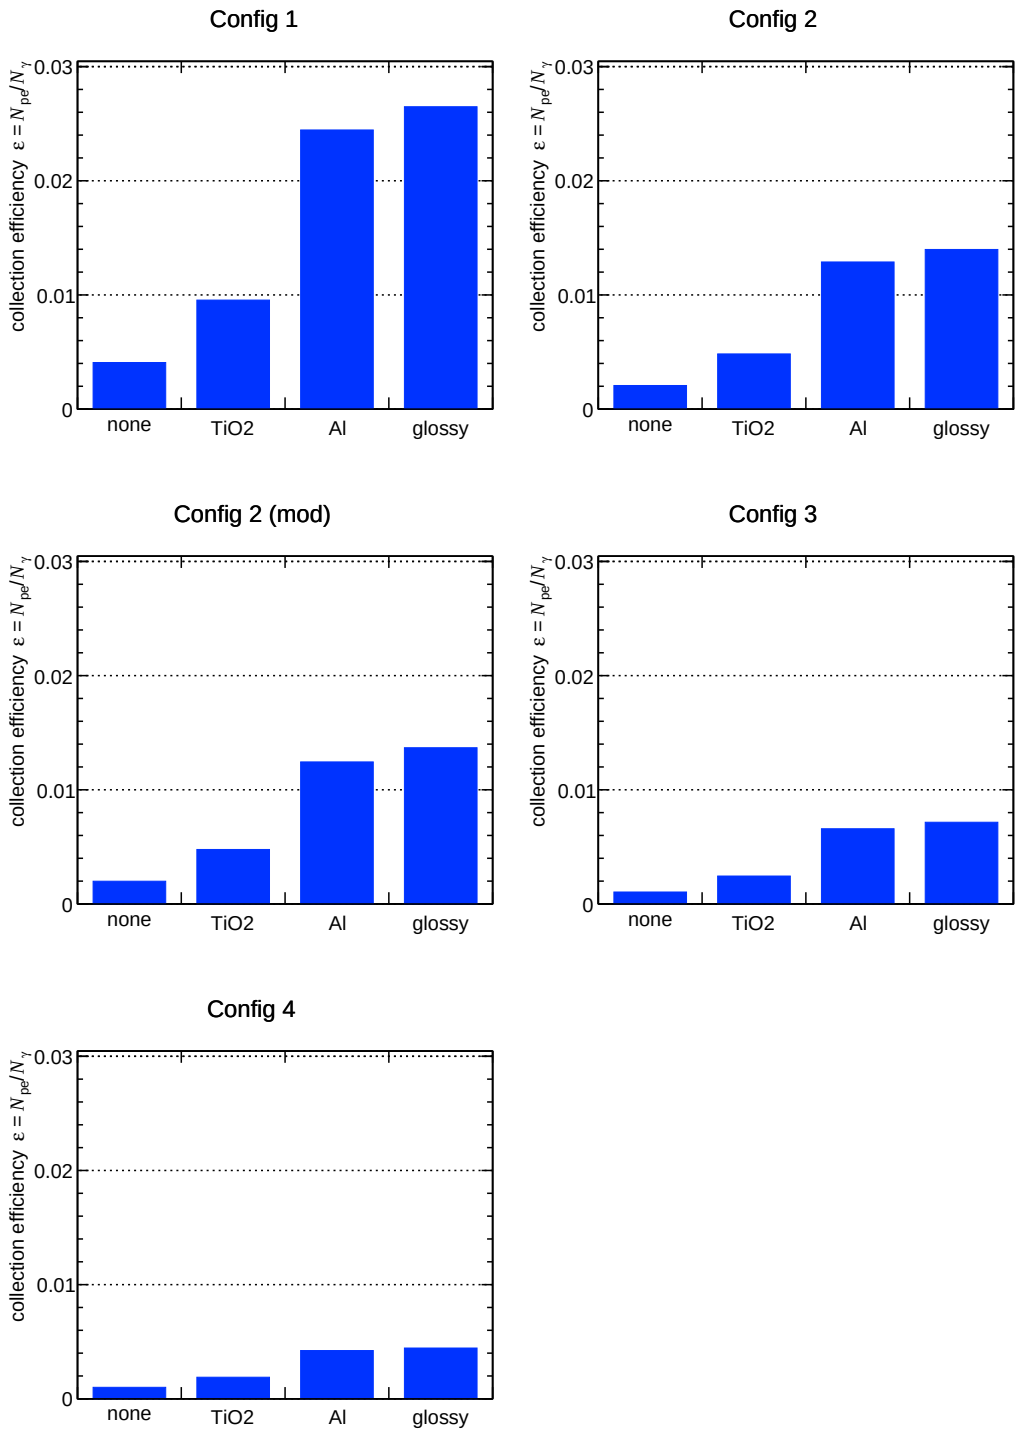



**Figure 17:** Plate-averaged collection efficiency $\varepsilon = \sum N_{\mathrm{pe}} / \sum N_{\gamma}$ for the four reflector treatments and five detector layouts, from the uniform whole-plate irradiation (25 000 generated events per panel). Glossy paper is brightest in every layout and air-backed aluminium is second; the contact-limited bare plate is the weakest wrapper in every layout.

**Table 8:** Plate-averaged collection efficiency (all SiPMs, uniform whole-plate irradiation; the pooled ratio of Eq. 4 over all events). The statistical uncertainties are below the quoted digits.

| Layout | Bare | $TiO_2$ | Al | Glossy |
|---|---|---|---|---|
| Config 1 (8 SiPMs) | $4.081 \times 10^{-3}$ | $9.551 \times 10^{-3}$ | $2.445 \times 10^{-2}$ | $2.649 \times 10^{-2}$ |
| Config 2 (4 SiPMs) | $2.068 \times 10^{-3}$ | $4.834 \times 10^{-3}$ | $1.289 \times 10^{-2}$ | $1.398 \times 10^{-2}$ |
| Config 2 (mod) (4 SiPMs) | $1.993 \times 10^{-3}$ | $4.773 \times 10^{-3}$ | $1.244 \times 10^{-2}$ | $1.368 \times 10^{-2}$ |
| Config 3 (2 SiPMs) | $1.048 \times 10^{-3}$ | $2.447 \times 10^{-3}$ | $6.588 \times 10^{-3}$ | $7.158 \times 10^{-3}$ |
| Config 4 (1 SiPM, WLS) | $1.007 \times 10^{-3}$ | $1.891 \times 10^{-3}$ | $4.228 \times 10^{-3}$ | $4.448 \times 10^{-3}$ |

A complementary, absolute figure of merit is the mean photoelectron yield per event, and it is the quantity the experiment actually measures, because the experiment reports a pulse height (or a threshold crossing) rather than a dimensionless efficiency. It is also the quantity that does *not* carry the model dependence of the PDE and the coupling, which is why both are quoted. Because the whole-plate beam covers the entire scintillator, almost every primary enters the slab, and 499 510 of the 500 000 events register at least one photoelectron (detection probability 0.99902). Of the 490 without one, 14 are in config 3 bare and 476 (119 per wrapper) are in Config 2 (mod), where the muon hits a removed corner; the latter is the geometric loss of Sec. 4, not a light-collection failure. The mean per event and the mean per *detected* event therefore differ by at most 0.5 % (Config 2 (mod)). Table 9 lists the mean per event for every (config, wrapper) pair. Since the optical-photon production is set by the muon energy deposit and is independent of the wrapping, the yield is simply the plate-averaged efficiency of Table 8 scaled by the (layout-independent) mean number of photons produced per event, so it reproduces exactly the same wrapper ordering.

**Table 9:** Mean photoelectron yield per event for the full-slab irradiation (whole-plate beam, 25 000 events per cell), for each layout and reflector treatment. Of the 500 000 whole-plate events, 499 510 detect at least one photoelectron (detection probability 0.99902; 14 events without a detected photoelectron are in config 3 bare and 476 are corner-clipped muons of Config 2 (mod)). The Config 2 (mod) entries are per generated event; per entering event they are 0.48 % higher. The statistical uncertainties are below the quoted digits.

| Layout | Bare | $TiO_2$ | Al | Glossy |
|---|---|---|---|---|
| Config 1 (8 SiPMs) | 79.86 | 186.13 | 480.75 | 520.70 |
| Config 2 (4 SiPMs) | 40.38 | 94.12 | 253.79 | 275.13 |
| Config 2 (mod) (4 SiPMs) | 38.82 | 92.56 | 242.63 | 267.37 |
| Config 3 (2 SiPMs) | 20.45 | 47.86 | 129.22 | 140.73 |
| Config 4 (1 SiPM, WLS) | 19.52 | 36.88 | 82.81 | 87.00 |

### 5.3 Survival versus mixing: the two axes that organise every result

The ordering of Table 8 is not a single effect, and it is worth separating it into two, because they pull in opposite directions and because almost every other result in this report follows from the same pair.

*Survival* is the fraction of the trapped light that survives the transport. It is governed by the critical angle at the plate's non-instrumented faces and by what happens to the sub-critical fraction that leaves the guided mode:

- the bare plate keeps the full TIR cone, but the sub-critical 39.3° cone that crosses the air gap reaches the black holder and is absorbed—so the bare plate keeps the cone but loses everything outside it;
- the diffuse paint destroys the cone altogether: there is no TIR at a `groundfrontpainted` surface, and the light is re-emitted isotropically, so most of it is re-absorbed on the next encounter;

- the two mirrors keep the cone and return the sub-critical fraction with a reflectivity of 0.90–0.96, which is why they are the brightest.

The bare plate is thus *not* the brightest, even though it keeps the full TIR cone, because the region outside the cone is exactly where a black holder catches everything. Adding the contact loss of Sec. 4.2—a loss on *every* bounce, not only on the sub-critical cone—takes it from third-brightest to weakest, which is what the measurement requires.

*Mixing* is the degree to which the light that survives has forgotten where it was produced. A cavity bounded by a specular mirror and a TIR guide is a good mixer; a cavity whose walls are Lambertian is a poor one, because each re-emission randomises the direction and the light leaves towards whichever wall is nearest, so the probability of reaching a sensor depends on the geometry of the plate and on the sensor positions. The three-patch data of Sec. 5 already shows the two extremes: in the four Table IV layouts the specular wrappers are flat to within 0.8 % to 4.2 % across the three patches, while the diffuse paint varies by a factor 1.75–2.21. Config 2 (mod) exaggerates the effect without changing its order: even there the paint varies by a factor 3.58 against 1.21 (Al) and 1.17 (glossy), because the corner sensor is much closer to the illuminated corner than to the centre.

The useful statement, and the one that organises the rest of the report, is that these two axes are *not* independent. The wrappers that survive well (glossy, Al) mix well, because both properties come from the same specular+TIR boundary; the wrapper that mixes badly (the paint) survives badly, for the same reason. The bare plate is the interesting case: it mixes *excellently* (it is a perfect TIR guide, like the two mirrors) but survives badly (absorbing wall, plus the contact loss), and it is the only wrapper for which the two axes disagree. This is visible in the data as a bare plate that is dim, yet whose response still varies with position by a few to 19 %—the residual structure of a cavity that mixes well but not perfectly.

The consequence for the position reconstruction of Sec. 8 is direct: light sharing carries position information exactly when the mixing is poor, so the diffuse paint—the dimmest of the reflective wrappers and the least uniform—is the only one whose *integrated charges* localise the muon, while the bright, perfectly mixing specular wrappers have to be read out in time instead.

## 6 The uniformity of the response over the plate

### 6.1 Full-plate maps

The same whole-slab events that give the plate average of Sec. 5 also resolve the response by entry position. Reconstructing the efficiency from the `sipmHits` tree in $5 \times 5$ mm cells gives the field

$$\varepsilon(x,y) = \frac{\sum_{e\,:\,(x_e,y_e)\in\text{cell}} \sum_{s\in\mathcal{S}} N_{\text{pe}}^{(e,s)}}{\sum_{e\,:\,(x_e,y_e)\in\text{cell}} N_{\gamma}^{(e)}}, \tag{5}$$

where the sums run over the whole-slab events whose primary-muon first-entry position $(x_e, y_e)$ falls inside the cell, i.e. identically to Eq. 4 but binned in the entry position.

Figure 18 shows the complete set of full-plate maps for config 1, one panel per reflector. The plate-averaged efficiencies are $4.081 \times 10^{-3}$ (bare), $9.551 \times 10^{-3}$ ($TiO_2$), $2.445 \times 10^{-2}$ (Al) and $2.649 \times 10^{-2}$ (glossy). The contact-limited bare plate has a modest inner deficit—$3.841 \times 10^{-3}$ within $r < 60$ mm versus $4.135 \times 10^{-3}$ outside, about 7.1 %—reflecting the holder-loss model. Aluminium and glossy paper are essentially flat ($2.431 \times 10^{-2}$ versus $2.448 \times 10^{-2}$ and $2.636 \times 10^{-2}$ versus $2.651 \times 10^{-2}$, i.e. 0.7 % and 0.6 %). $TiO_2$ is the only wrapper with a strong gradient, and it runs the other way: the inner disc ($r < 60$ mm, $6.729 \times 10^{-3}$) is *dimmer* than the outer annulus ($1.018 \times 10^{-2}$), a factor of 1.51. The map itself is not a radial gradient at all: it is a *bright frame around a dark central cross*, and the brightest cells are the ones immediately adjacent to a SiPM (the cells reaching $1.215 \times 10^{-2}$ against $6.40 \times 10^{-3}$ in the central $50 \times 50$ mm cell). The specular transport erases the entry position almost completely.

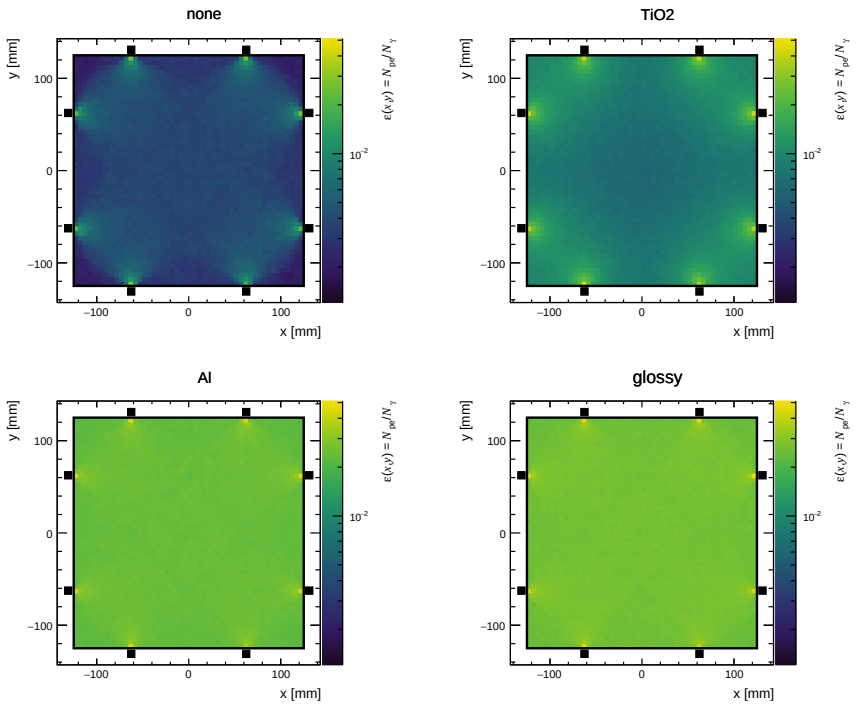



**Figure 18:** Full-plate collection-efficiency maps for config 1, from 25 000 whole-slab events per panel ($5 \times 5$ mm cells, on a logarithmic colour scale shared by the panels). Aluminium and glossy paper are almost flat; the contact-limited bare plate (top left) is the weakest and has a modest inner deficit, while $TiO_2$ (top right) is the only one with a strong gradient, dimmest in a central cross and brightest towards the edges and corners. The bold rectangle is the 250 mm×250 mm slab outline and the black squares mark the eight SiPM positions.

Figure 19 repeats the whole-slab scan for config 2 (four sensors, one on each lateral face at the config-1 offsets). Every configuration is weaker than its config-1 counterpart—roughly halved, as expected from the reduced sensor area—while the ordering is unchanged. The bare plate gives $\varepsilon = 2.068 \times 10^{-3}$ ($1.954 \times 10^{-3}$ inside $r = 60$ mm versus $2.094 \times 10^{-3}$ outside); $TiO_2$ reaches $4.834 \times 10^{-3}$ with the same centre deficit ($3.407 \times 10^{-3}$ versus $5.153 \times 10^{-3}$), and Al and glossy reach $1.289 \times 10^{-2}$ and $1.398 \times 10^{-2}$, both nearly flat. The bare $<$ $TiO_2$ $<$ Al $<$ glossy sequence is therefore robust against the sensor count: fewer sensors lower the overall light collection but do not change the physics of the wrapper.

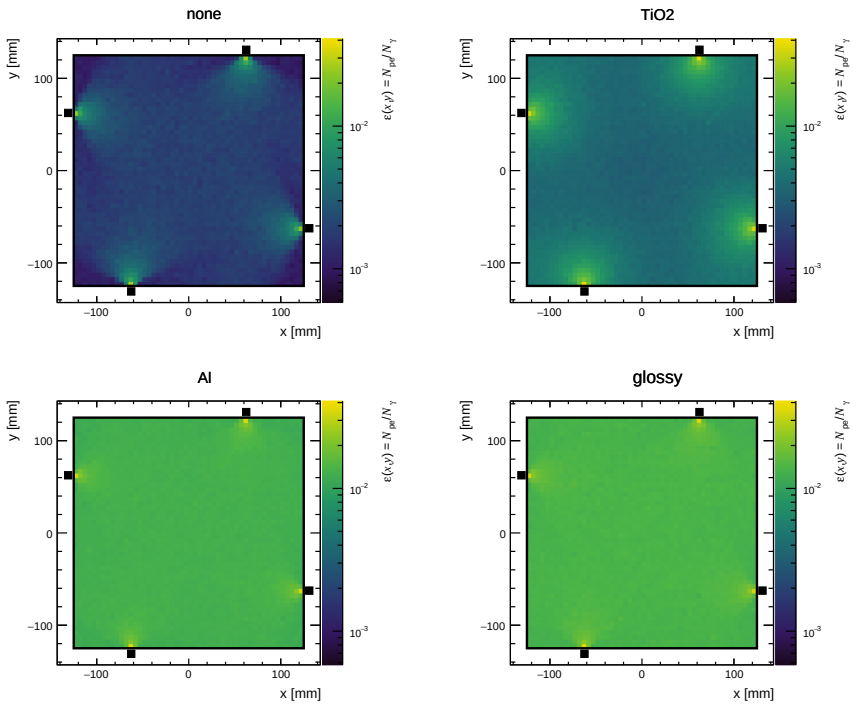



**Figure 19:** Full-plate collection-efficiency maps for config 2 (four SiPMs, one per lateral face at the config-1 offsets), otherwise identical to Fig. 18. The reflector ordering is the same, Al and glossy are almost flat, and each efficiency is about half the config-1 value.

Figure 20 shows Config 2 (mod). The integrated efficiencies are $1.993 \times 10^{-3}$ (bare), $4.773 \times 10^{-3}$ ($TiO_2$), $1.244 \times 10^{-2}$ (Al) and $1.368 \times 10^{-2}$ (glossy), 1 % to 4 % below their config-2 values, so the cut and the corner placement cost very little total light. The *shape* of the field is different, however. All four wrappers now have a pronounced central deficit: inside $r < 60$ mm the efficiency is $1.397 \times 10^{-3}$ versus $2.126 \times 10^{-3}$ outside for the bare plate (a ratio 0.657), 2.974 versus $5.177 \times 10^{-3}$ for $TiO_2$ (0.574), and 93 % to 94 % of the outer value for Al and glossy. There is no top–bottom asymmetry at all—the top/bottom ratios are 1.006, 1.016, 1.002 and 1.003—because the four sensors are four-fold symmetric. The maps show a bright four-pointed star at the chamfers around a dark centre, and the contrast is larger than in config 2 for every wrapper ($\kappa_{2D} = 2.84$, 3.69, 1.22 and 1.18 against 2.08, 2.56, 1.14 and 1.13).

This is the nearest-sensor rule in its clearest form. The four sensor normals point at the plate centre, but the light is not focused: the centre is 168 mm from every sensor, the largest such distance in the study, whereas the corner beam lies about 27 mm from a chamfer sensor. Re-aiming the sensors therefore does not make the cavity a better mixer; it moves the bright region from the edges to the corners and makes the centre relatively darker. The 0.461 % of the plate removed by the cuts is too small to be visible in the maps or in the plate-averaged efficiencies.

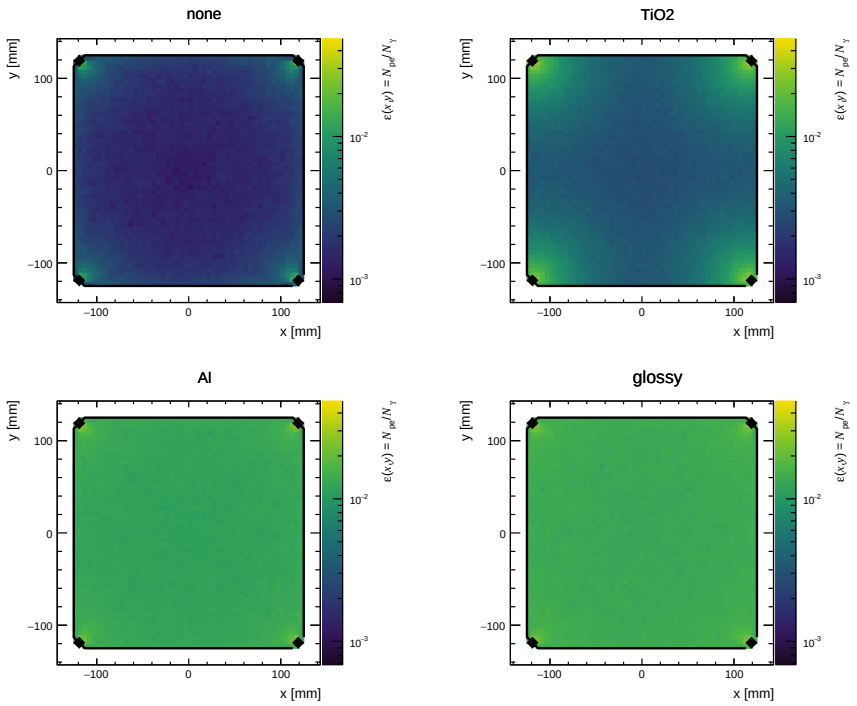



**Figure 20:** Full-plate collection-efficiency maps for Config 2 (mod), the corner-cut four-sensor layout, otherwise identical to Figs. 18–19. The octagon outline and the four SiPMs on the diagonal faces are marked; the cut removes 0.461 % of the plate. All four wrappers show a dark centre and a bright star at the chamfers, because the centre is farther from every sensor than any other point of the plate, and there is no top–bottom asymmetry.

Figure 21 shows config 3, in which both sensors sit on the same (top, $+y$) face. The integrated efficiencies are bare $1.048 \times 10^{-3}$, $TiO_2$ $2.447 \times 10^{-3}$, Al $6.588 \times 10^{-3}$ and glossy $7.158 \times 10^{-3}$, roughly half their config-2 values because concentrating both sensors on one face halves the solid angle available to photons born on the opposite side. Aluminium and glossy paper remain nearly flat (2.2 % and 2.0 % between the inner and outer regions). The $TiO_2$ panel is brightest near the instrumented top ($+y$) edge and dimmest on the far ($-y$) side: in the report frame the top/bottom efficiencies are $3.839 \times 10^{-3}$ and $1.073 \times 10^{-3}$, a factor 3.58. The contact-limited bare plate shows the same sign but a much weaker asymmetry ($1.217 \times 10^{-3}$ versus $0.881 \times 10^{-3}$).

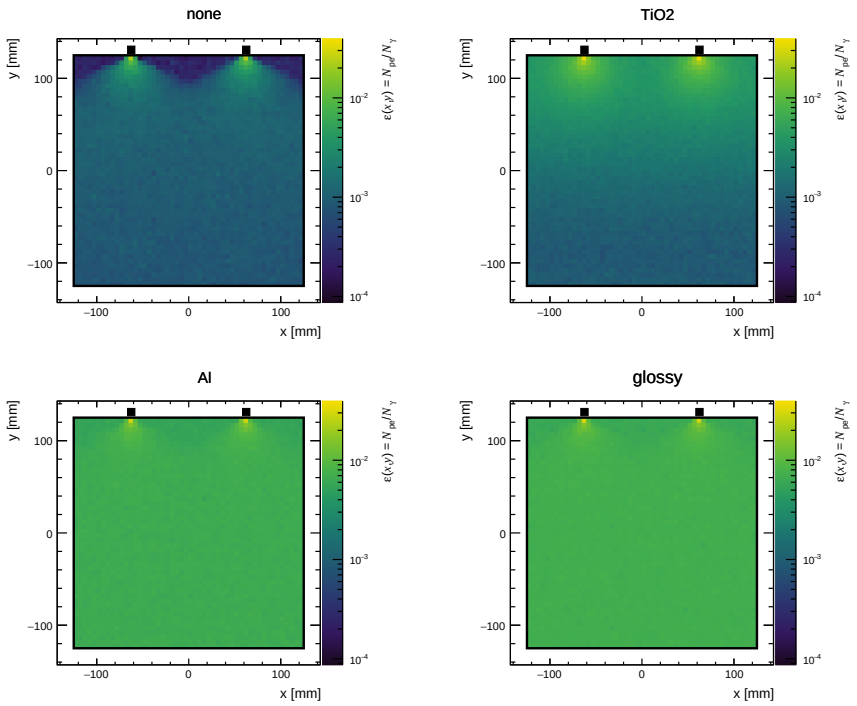



**Figure 21:** Full-plate collection-efficiency maps for config 3 (two SiPMs, both on the top $+y$ face). The $TiO_2$ panel shows the clearest top–bottom asymmetry, the contact-limited bare plate shows a weaker one, and the Al and glossy panels remain nearly flat.

Figure 22 completes the set with the single-SiPM WLS-fibre layout (config 4). The efficiencies are bare $1.007 \times 10^{-3}$, $TiO_2$ $1.891 \times 10^{-3}$, Al $4.228 \times 10^{-3}$ and glossy $4.448 \times 10^{-3}$, comparable to config 3 and with the same ordering bare $<$ $TiO_2$ $<$ Al $<$ glossy. Glossy paper is again the most efficient wrapper and air-backed Al is second. $TiO_2$ shows the clearest gradient: in the report frame the top/bottom efficiencies are $2.995 \times 10^{-3}$ and $0.808 \times 10^{-3}$, a factor 3.71. The contact-limited bare plate shows a weaker but visible gradient ($1.225 \times 10^{-3}$ versus $0.783 \times 10^{-3}$, a factor 1.56), and Al and glossy agree to within about 9 % between the top and the bottom half, so even with a single readout face the specular transport largely erases the entry-point dependence.

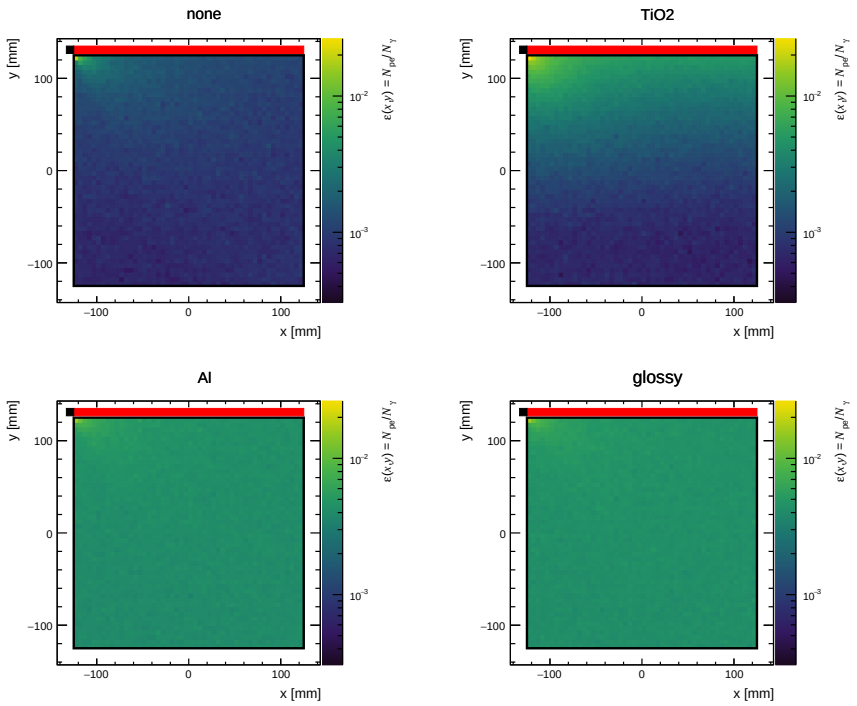



**Figure 22:** Full-plate collection-efficiency maps for config 4 (single SiPM + WLS fibre clamp). The efficiencies are comparable to config 3 and follow the same ordering, with the contact-limited bare plate now the weakest. The $TiO_2$ panel retains a strong top–bottom gradient, the bare plate a weaker one, while the Al and glossy panels are almost flat. The red bar along the top ($+y$) edge marks the WLS fibre clamp (the fibres run the full plate length along it) and the black square at its left end is the single read-out SiPM, so the fibres can be located relative to the read-out. Same report frame and binning as Figs. 18–21, each panel on its own logarithmic colour scale.

Across all five layouts glossy paper is the brightest wrapper and air-backed aluminium the second, while the weakest is the contact-limited bare plate in every layout. The efficiency scales roughly with the collected photosensitive area, confirming that the read-out layout sets the overall scale while the wrapper sets the ordering. The corner-cut layout has the same area as config 2 and sits 3.6 % below it (bare), the small residual of placing the same sensors farther from the plate centroid.

### 6.2 A single number for the spread: $\kappa_{2\mathrm{D}}$

A purely radial contrast is deliberately *not* used. The read-out layouts have no continuous rotational symmetry—configs 1, 2 and 2 (mod) are four-fold symmetric, configs 3 and 4 single-sided—and the plate is square, so the collection efficiency is not a function of radius alone. Beyond the inscribed circle ($r > 125\,\mathrm{mm}$) only the four corner wedges of the plate are populated, so a fixed-width radial bin would mix a shrinking range of directions and its radial profile $\varepsilon(r)$ would reflect the geometry of the square rather than the detector. The uniformity is therefore quantified directly in the plate plane $(x, y)$.

The *two-dimensional contrast*

$$\kappa_{2\mathrm{D}} \;=\; \frac{\max_{\mathrm{cell}}\,\varepsilon}{\min_{\mathrm{cell}}\,\varepsilon} \tag{6}$$

collapses the field to a single number, the ratio of the brightest to the darkest region; it answers "how large is the spread" and is the quantity that ranks the layouts and reflectors. $\kappa_{2\mathrm{D}}$ is evaluated on a coarser $5 \times 5$ grid of 50 mm cells, because on the 5 mm cells of the maps the per-cell statistics are too thin for a stable max/min—Poisson noise in the extreme cells would inflate it. The measure is therefore deliberately the *robust* dynamic range, and is smaller than

the raw peak-to-trough range of the fine maps. No symmetry is assumed, so $\kappa_{2D}$ is meaningful for the single-sided layouts 3 and 4 as well as for the four-sided ones.

The direction-sensitive contrast $\kappa_{2D}$ ranks the reflectors consistently in *every* layout,

$$\mathrm{TiO_2} > \text{bare} > \mathrm{Al} \gtrsim \text{glossy},$$

i.e. the diffuse $TiO_2$ paint is the *least* uniform wrapper and glossy paper the most uniform. The diffuse paint is also the dimmest direct-coupled wrapper, while the bright specular wrappers are the most uniform: the specular transport mixes the light so thoroughly that the entry position is largely erased ($\kappa_{2D} \approx 1.1$–$1.4$), whereas the diffuse paint retains a pronounced positional response. The contact-limited bare plate sits between them because the holder loss is itself position dependent. Numerically the $TiO_2$ contrast grows from $\kappa_{2D} = 1.911$, 2.579 and 3.688 in the four-sided layouts 1, 2 and 2 (mod) to 8.413 and 10.897 in the single-sided layouts 3 and 4; the bare plate spans 1.56–4.14, aluminium 1.07–1.37 and glossy 1.07–1.36. A muon crossing anywhere on the plate is therefore collected within about 40 % of the most favourable point for Al/glossy, within a factor of 4.1 for the contact-limited bare plate, and within a factor of 10.9 for $TiO_2$ in the single-sided layouts. Figure 23 collects all twenty values as bar charts, one panel per layout; Table 10 lists the same values numerically, resolving the near-unity entries that the linear bar scale cannot.

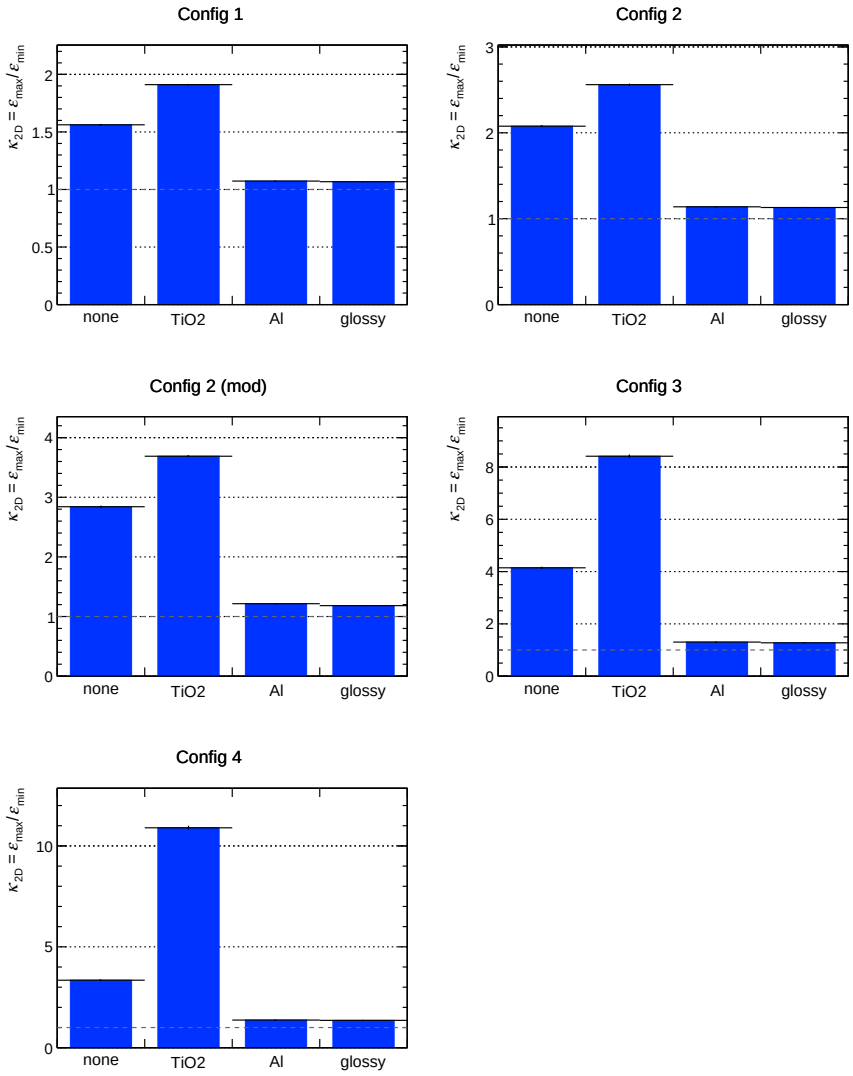



**Figure 23:** Full-plate position contrast $\kappa_{2D} = \varepsilon_{\max}/\varepsilon_{\min}$ over the 50 mm cells of the whole-slab map, one panel per layout and one bar per reflector (each panel on its own linear scale). This is the same kind of comparison as the three near-edge patches, but evaluated over the entire plate; the dashed line marks unity (a perfectly uniform response). $TiO_2$ shows by far the largest contrast in every layout, the contact-limited bare plate is second, and Al and glossy paper stay closest to unity.

**Table 10:** Full-plate position contrast $\kappa_{2D}$ over the 50 mm cells of the whole-slab map, per layout and reflector, with the propagated Poisson uncertainty. These are the values plotted in Fig. 23; the table resolves the near-unity entries that the linear bar scale cannot, and shows the $TiO_2 >$ bare $>$ Al $\gtrsim$ glossy ordering in every layout. The number in parentheses is the uncertainty in the last digits of the preceding value; because the statistic is an extreme value, the propagated Poisson uncertainty is a lower bound on the true spread.

| Reflector | Config 1 | Config 2 | Config 2 (mod) | Config 3 | Config 4 |
|---|---|---|---|---|---|
| Bare | 1.562(8) | 2.077(14) | 2.841(20) | 4.145(43) | 3.346(33) |
| $TiO_2$ | 1.911(7) | 2.561(12) | 3.688(17) | 8.413(67) | 10.897(104) |
| Al | 1.073(2) | 1.138(3) | 1.215(3) | 1.303(5) | 1.371(6) |
| Glossy | 1.068(2) | 1.130(3) | 1.182(3) | 1.275(5) | 1.356(6) |

The single-sided layouts are the most demanding. The largest $TiO_2$ two-dimensional contrast of the entire study appears in config 4 ($\kappa_{2D} = 10.897$), just above config 3 (8.413): the front–back

asymmetry of the diffusely wrapped plate is far stronger than any radial average reveals. The Al and glossy wrappers in the same layouts stay below 1.4, whereas the contact-limited bare plate reaches 4.14 in config 3 and 3.35 in config 4. A single-sided layout is simply not described by a radius, so only the full $(x, y)$ map—not a radial profile—carries the information.

### 6.3 The shape of the field: distance to the nearest sensor

The contrast number of the previous subsection says how large the spread is, but not what shape it has, and the maps show that the shape is not radial at all. For config 1 the bare plate maps to a *checkerboard*: the $50 \times 50$ mm cell efficiencies alternate between $3.3 \times 10^{-3}$ and $5.2 \times 10^{-3}$ from cell to cell, with the bright cells being exactly those that contain a SiPM. For config 2 the bare plate shows the same thing more sharply: the four cells that contain the four sensors read 3.21–3.42 $\times 10^{-3}$ while the remaining twenty-one read 1.65–2.07 $\times 10^{-3}$. For config 3 the bare plate has two bright cells ($2.20 \times 10^{-3}$ and $2.45 \times 10^{-3}$) at the two sensor positions, but the cell *between* them—on the instrumented face, but not on a sensor— is the darkest of the whole plate ($0.59 \times 10^{-3}$): light produced there leaves through the uninstrumented part of that face before it can reach a sensor. The diffuse $TiO_2$ paint shows the complementary structure: a bright frame, with the cells adjacent to the sensors reaching $1.215 \times 10^{-2}$ and the central cross falling to 6.4–8.0 $\times 10^{-3}$.

These patterns are all produced by the same rule, and the rule has a single coordinate: *the response tracks, on average, the distance from the interaction point to the nearest collection site.* Where the cavity mixes the light well, the response is independent of that distance; where it mixes poorly, the response falls off as the interaction point moves away from the sensors, because the light then has a longer and more lossy path to reach one. The rule is a statement about the *envelope* of the map and not a point-by-point description of it: the cell between the two sensors of config 3 quoted above is a counterexample to a strict monotonicity, and the reason is visible—that cell lies on the instrumented face, so its light leaves the plate immediately through the part of that face that carries no sensor. The distance statistic below integrates over such configurations, so what it measures is the trend that survives the averaging.

Figure 24 tests this directly, by binning the whole-slab events in the distance $d$ to the nearest collection site and plotting the efficiency normalised to the plate average against it. For the four direct-coupled layouts the collection sites are the SiPM tiles; for config 4 the collection aperture is the fibre clamp, a line along the top edge, so $d$ is the distance to that line. The four curves of each panel share one shape but not one level:

- in the four Table IV layouts the two specular wrappers are flat to within 5 % over the whole range—they are near-perfect light mixers. In Config 2 (mod) the first bin is 1.28× (Al) and 1.25× (glossy) the plate average, because the nearest sensor is only about 27 mm from the corner;
- the contact-limited bare plate shows a clear excess in the first 25 mm (1.44×, 2.12×, 2.72× and 3.36× the plate average for configs 1, 2, 2 (mod) and 3) and then relaxes to slightly *below* unity, which is the signature of a cavity that mixes well but loses a little light on every extra bounce;
- the diffuse paint shows the largest excess (1.63×, 2.40×, 3.32× and 4.52×) and the steepest decay, reaching 0.36–0.37 of the average at the far side of the plate in the single-sided layouts and 0.59–0.63 in Config 2 (mod).

This single figure therefore contains the explanation of the whole uniformity result: the specular wrappers are uniform because they mix, the paint is non-uniform because it does not, and the bare plate sits in between because the contact loss destroys the perfect mixing of the air-gap guide without destroying its geometry. It also explains the sign flip of the position trend seen in the three-patch scan: in the four-sided layouts the corner patch is close to two sensors and is therefore the brightest, and in Config 2 (mod) it is close to one sensor and still brighter than the centre; in the single-sided layouts the sensors are on the far side of the plate and the centre of

the plate—the point furthest from any sensor—is not the dimmest point, because what matters is the distance to the *nearest* sensor, and the single sensor still beats the far corners.

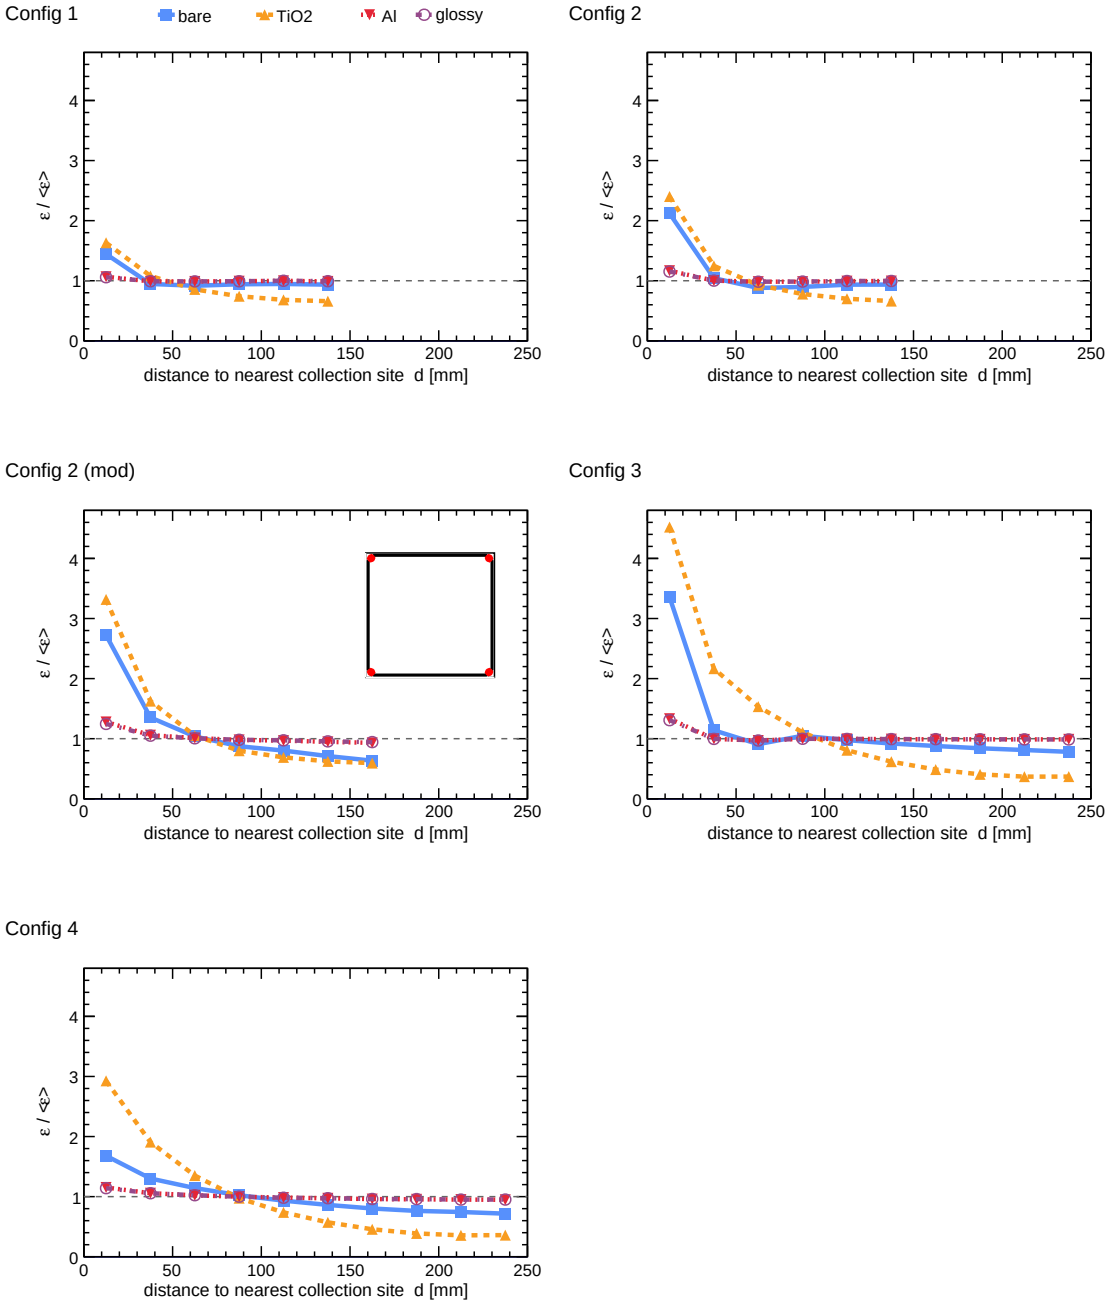



**Figure 24:** The response as a function of the distance to the nearest collection site. Each panel is one layout; the abscissa is the distance $d$ from the muon's entry point to the nearest SiPM tile (configs 1, 2, 2 (mod), 3) or to the WLS fibre line along the top edge (config 4), and the ordinate is the collection efficiency normalised to the plate average of the same layout and treatment. The inset in the Config 2 (mod) panel marks its octagonal outline and the four diagonal sensors. The dashed line is the plate average. The four treatments share one shape and differ only in level: the specular wrappers are flat because they mix the light thoroughly, while the diffuse paint and the contact-limited bare plate are brightest close to a sensor and fall away from it. Error bars are the propagated Poisson uncertainties.

# 7 The spectral and temporal signature of the detected light

## 7.1 Wavelength of detected photons

Figure 25 shows the wavelength distribution of detected photoelectrons, weighted by their count, for the four reflectors. The distribution peaks near 456 nm for the reflective wrappers (config-1 centre means of 456.86 nm for glossy, 456.15 nm for Al and 454.45 nm for $TiO_2$), i.e. slightly red-shifted with respect to the 425 nm emission peak. This is the expected consequence of self-absorption: the shorter-wavelength part of the emission overlaps the absorption band and is attenuated over the multi-bounce path, so the surviving and detected spectrum is red-shifted. The contact-limited bare plate is bluer (449.46 nm) because the holder-contact loss suppresses the longest multi-bounce paths before they can redden the spectrum; its lower yield still leaves a well-defined distribution.

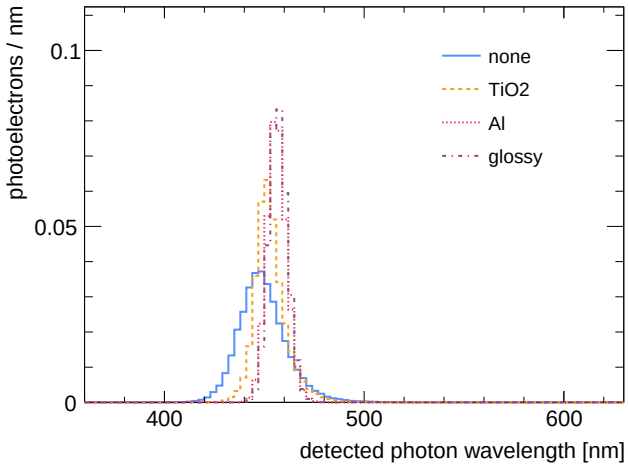



**Figure 25:** Wavelength distribution of detected photoelectrons (config 1), weighted by detected count. The reflective wrappers give a distribution peaking near 456 nm, red-shifted from the 425 nm emission peak by self-absorption over the multi-bounce path.

Figure 26 compares the detected-photon spectrum of the five configurations for each wrapper. Configurations 1, 2, 2 (mod) and 3, in which the SiPMs view the tile directly, all detect the same blue scintillation spectrum: the *mean* wavelength is essentially independent of the number and placement of the sensors, moving only from 457.01 nm (glossy, config 1) through 456.97 nm (Config 2 (mod)) to 457.50 nm (config 3), the small increase reflecting the slightly longer collection path of the single-sided layouts. Config 4 is qualitatively different: the WLS fibres absorb the blue light and re-emit it at their own emission band, so the detected spectrum is shifted to 498.5 nm (glossy) — a green-shift of some 42 nm. The same shift appears for every wrapper, including the bare tile (near 499 nm), confirming that it originates in the fibre wavelength shifter rather than in the wrapper. The detected config-4 light is redder than the Y-11 emission peak (476 nm) because the blue side of the emission is preferentially re-absorbed along the fibre before reaching the read-out.

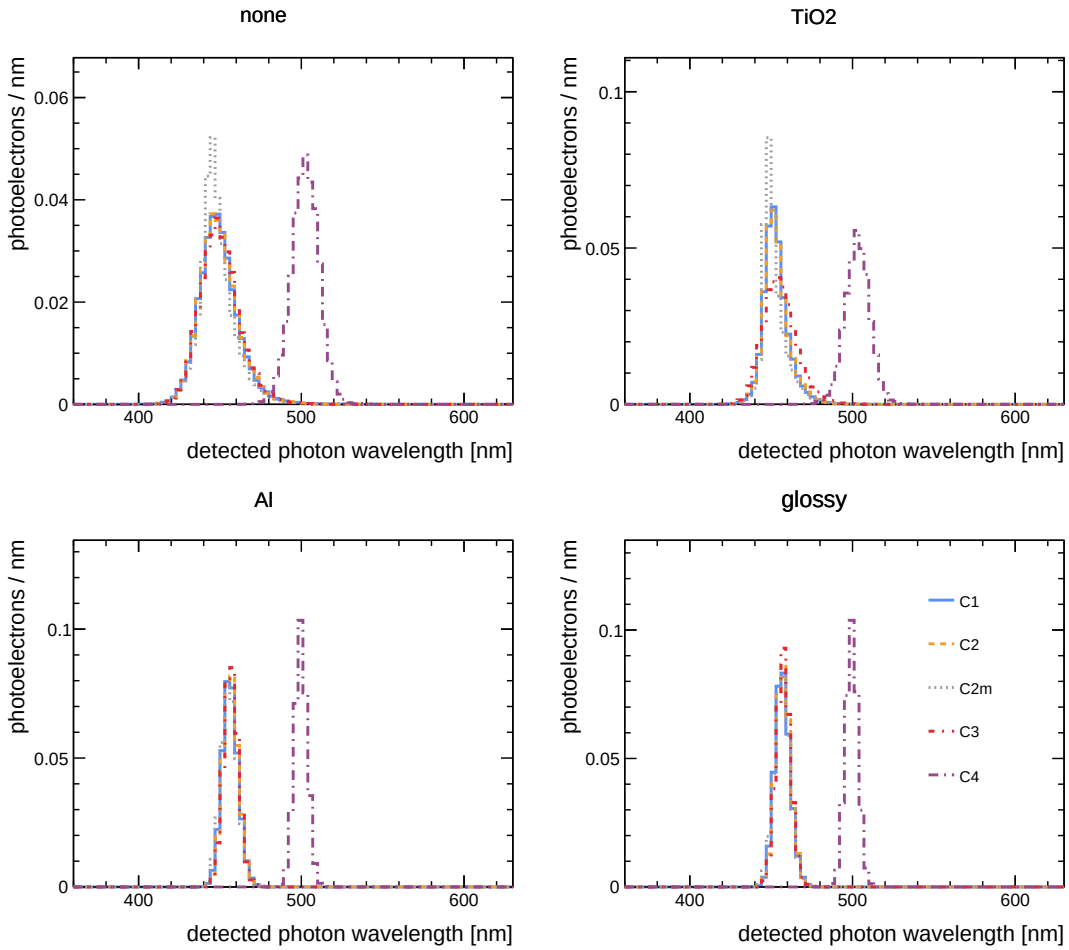



**Figure 26:** Detected-photon wavelength distribution, weighted by photoelectron count, for each wrapper (panel) and each configuration (five curves), using the pooled data of the three irradiation positions. Configurations 1, 2, 2 (mod) and 3 follow the 457 nm blue scintillation spectrum regardless of sensor count, whereas the WLS-fibre readout of config 4 is green-shifted to $\approx 510$ nm by the Y-11(200) emission band and the self-absorption along the fibre.

### 7.2 Arrival times and pulse persistence

The collection-efficiency maps above treat every detected photoelectron as a point; the per-photoelectron timing columns of the `sipmHits` tree let the *arrival-time structure* of the detected light be examined as well. Figure 27 shows the oscilloscope-style persistence map of the arrival-time profile for the five layouts (glossy paper). For each event the per-SiPM arrival times are summed over the layout's sensors and histogrammed in time, giving a trace of photoelectron count versus arrival time; stacking events and recording, for every 0.1 ns time bin, how many events showed a given count, yields a two-dimensional map whose abscissa is the arrival time, whose ordinate is the instantaneous photoelectron count, and whose colour is the number of events. The rising edge and the decaying tail therefore show how the detected light builds up and dies away, and the vertical spread at a given time is the event-to-event fluctuation of the instantaneous rate. For the four directly-read layouts the modal mean arrival times are 3.85 ns, 3.95 ns, 3.70 ns and 3.75 ns (configs 1, 2, 2 (mod), 3); the prompt peaks reach 54, 43, 50 and 47 photoelectrons per 0.1 ns bin, well above the 30 photoelectrons per bin that the shared ordinate of the figure can show, so the top of the prompt peak is clipped in the display; the single-fibre WLS read-out (config 4) peaks markedly later, at 7.95 ns and at only 18 photoelectrons per bin, which is therefore fully visible. The fractions arriving within 5 ns are 31.6, 30.4, 31.0, 29.8 and 13.4 % for configs 1, 2, 2 (mod), 3 and 4, within 10 ns 63.2, 61.3, 62.2, 60.2 and 40.3 %, while the

late ($t > 20\,\mathrm{ns}$) tail carries 10.7, 12.3, 11.6, 13.1 and 21.5 % of the photoelectrons.

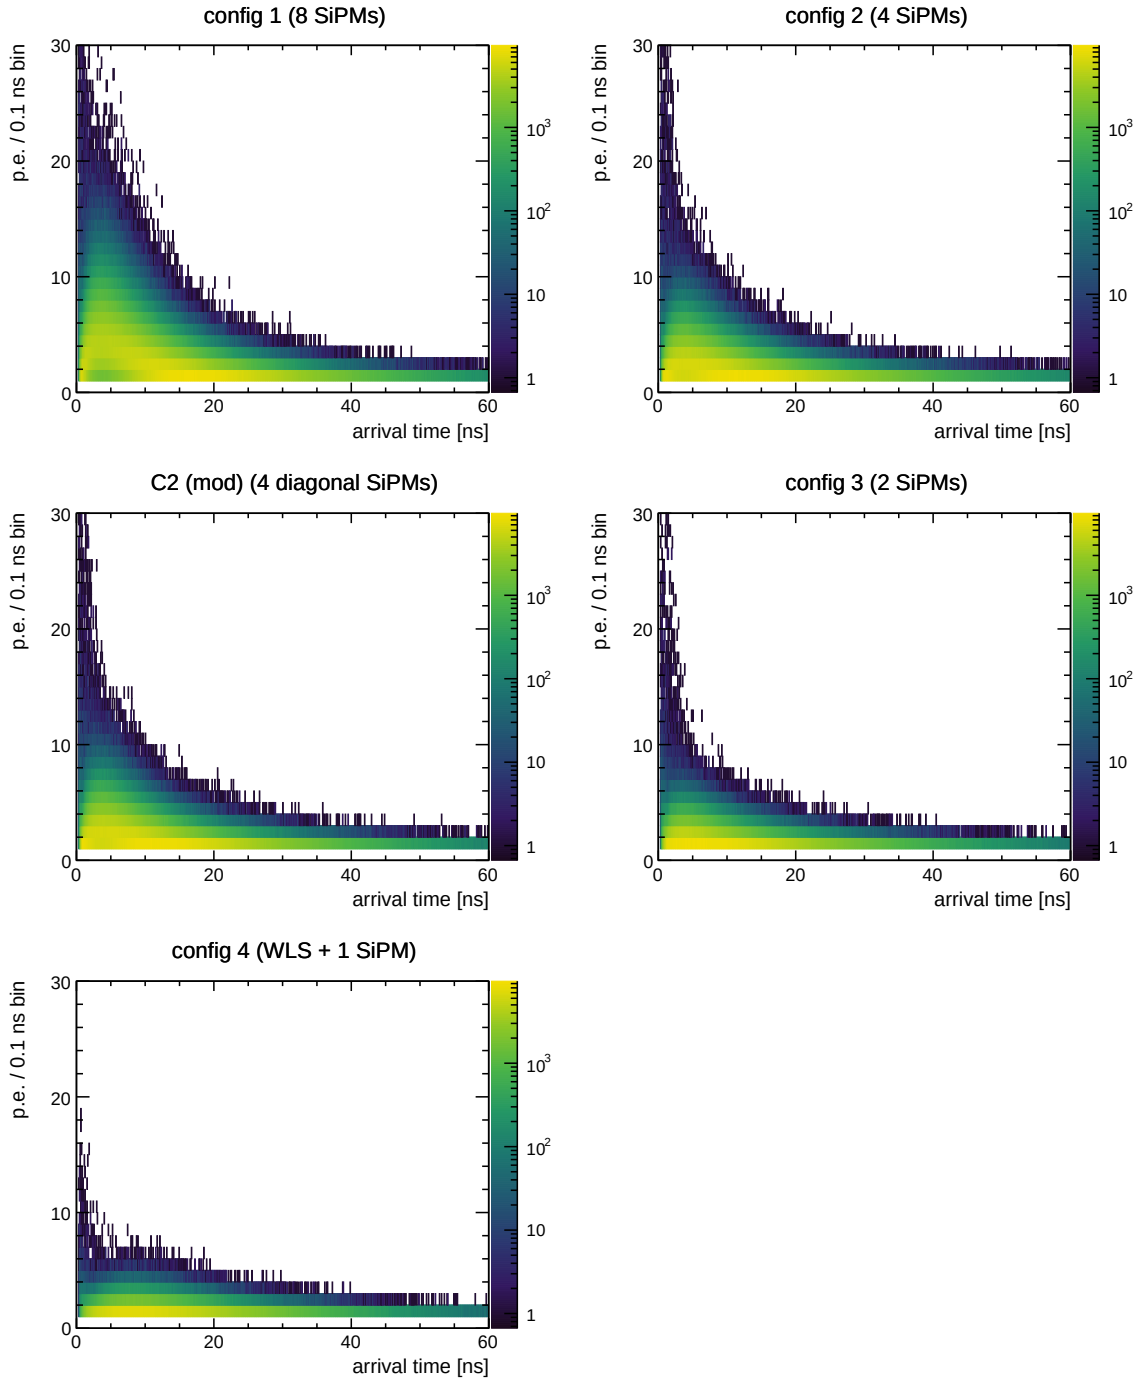



**Figure 27:** Arrival-time persistence map of the detected photoelectrons, one panel per layout (glossy paper, whole-plate irradiation). The abscissa is the global arrival time, the ordinate the number of photoelectrons in the corresponding 0.1 ns time bin (summed over the layout's SiPMs), and the colour the number of events reaching that point (shared logarithmic scale). Empty time bins are omitted; the ordinate is shared across the five panels (the sixth cell is empty) and linear over 0–30 photoelectrons per bin (1 p.e. per bin), the arrival-time axis over 0–60 ns. The prompt rise reflects the direct scintillation and Čerenkov light, while the slower tail is the multi-bounce transport and delayed (self-absorbed and re-emitted) light. The prompt peaks of the four directly-read layouts (configs 1, 2, 2 (mod), 3) extend above the shared ordinate and are therefore clipped; the WLS layout (config 4) builds up roughly 4.1 ns later than the others, its prompt peak shifted by the fibre absorption and re-emission.

The same arrival-time data can be collapsed into one average waveform per layout by averaging

the per-event traces of Fig. 27 over events; Fig. 28 overlays the five averages. This makes the amplitude hierarchy and the time shifts explicit. Integrating the mean rate over the full 60 ns window recovers 520.0, 274.5, 268.1, 140.3 and 86.8 photoelectrons per event for configs 1, 2, 2 (mod), 3 and 4 (the same ordering found in the collection-efficiency maps), and the rising edges of the four directly-read layouts coincide within a fraction of a nanosecond, whereas the WLS read-out of config 4 rises about 4 ns later and decays more slowly – its late tail stands out on the logarithmic ordinate as a straighter, shallower fall.

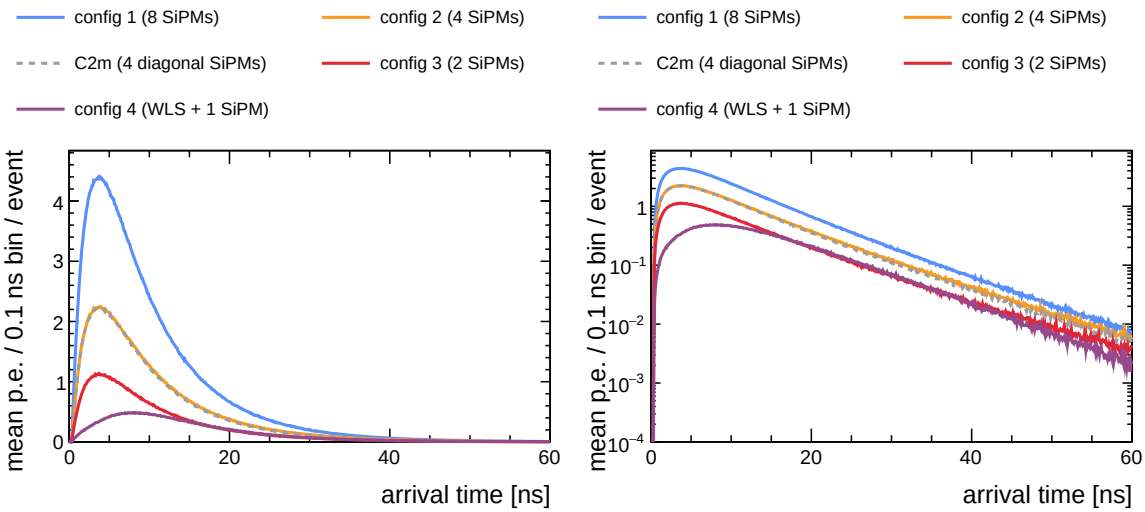



**Figure 28:** Average arrival-time waveform of the detected photoelectrons, one curve per layout (glossy paper, whole-plate irradiation), obtained by averaging the per-event traces of Fig. 27 over events. The abscissa is the global arrival time and the ordinate the mean number of photoelectrons in each 0.1 ns bin per event. The left panel uses a linear ordinate and the right a logarithmic one; all five configurations are drawn on each panel (the prompt peaks of the four directly-read layouts nearly coincide and extend above the linear range). The integrated mean yields are 520.0, 274.5, 268.1, 140.3 and 86.8 photoelectrons per event for configs 1, 2, 2 (mod), 3 and 4. The WLS layout (config 4) peaks roughly 4.1 ns later than the others and retains a long, slowly-decaying tail, the average-waveform counterpart of the persistence map.

Figure 29 combines the two offline observables: the arrival time and the wavelength of each detected photoelectron. Configurations 1, 2, 2 (mod) and 3 collect the blue scintillation spectrum directly, with a photoelectron-weighted mean of 456.7–457.2 nm, whereas the Y-11 WLS read-out of config 4 is green-shifted to 498.5 nm, consistent with the steady-state spectra of Fig. 26. In every layout the spectrum reddens with arrival time: the mean wavelength rises from 450.9 nm ($t < 5$ ns) to 467.7 nm ($t > 20$ ns) for the four direct configurations, and from 471.8 nm to 507.7 nm for config 4, while the rms spread narrows (37.9 → 35.5 nm and 44.1 → 26.5 nm, respectively). The config-4 early light is the direct blue component transmitted through the slab–pad contact; the late light is dominated by the green WLS component. The depleted blue edge of the late light is the signature of self-absorption along the multi-bounce path and, in config 4, of the additional wavelength-dependent attenuation of the WLS fibres.

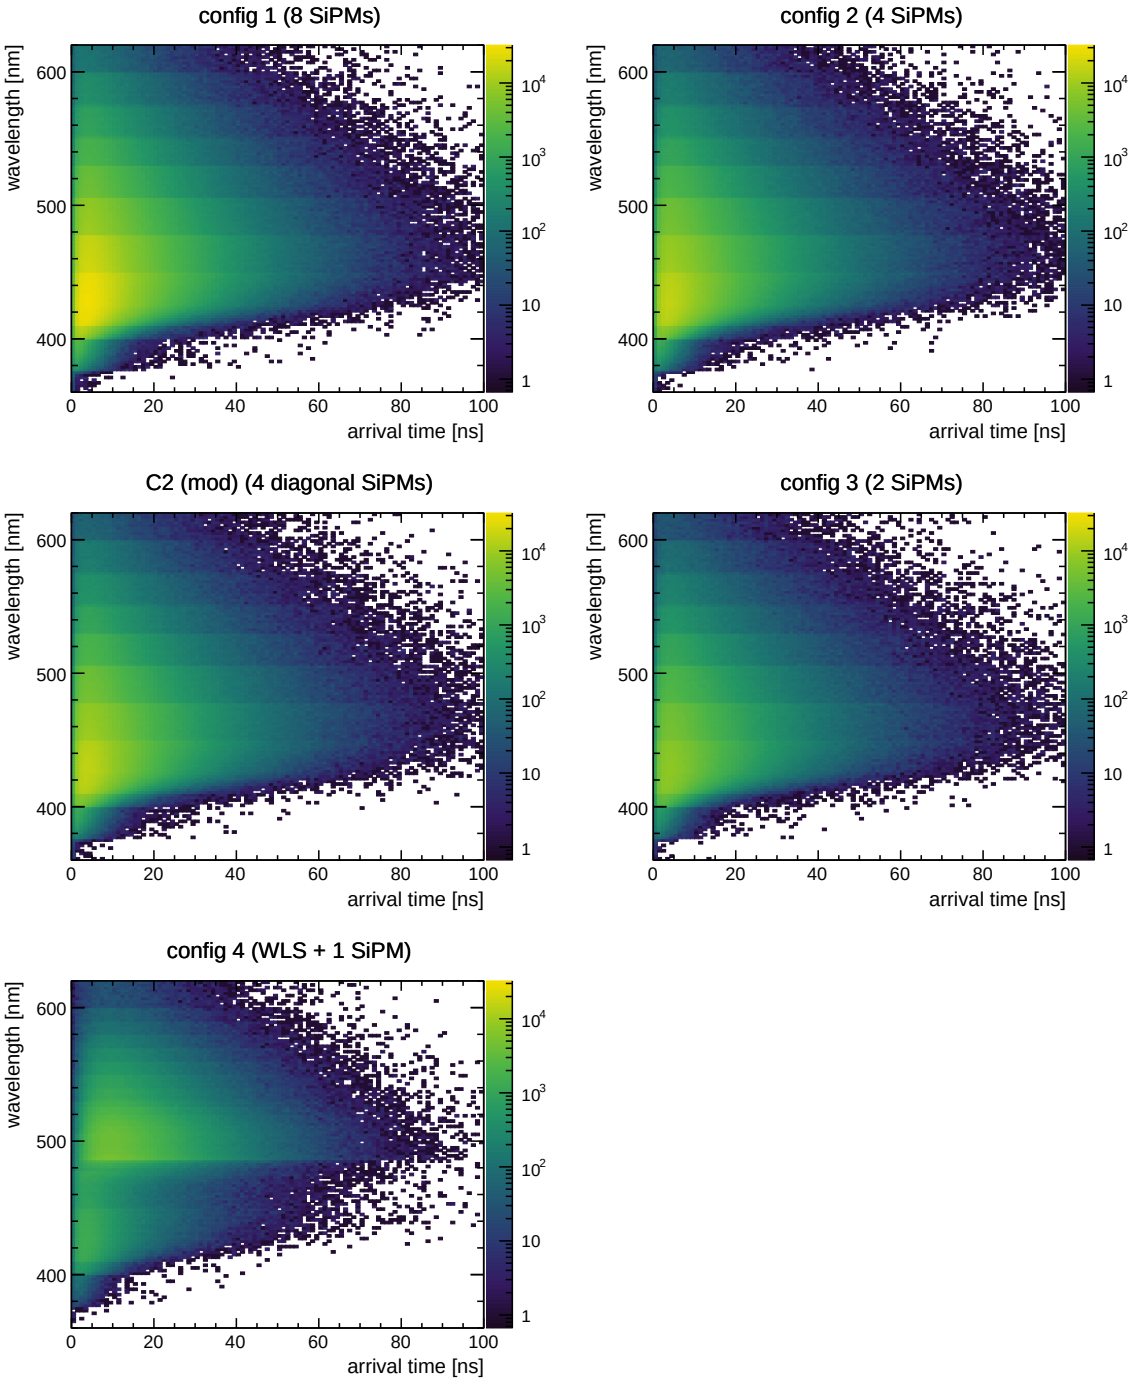



**Figure 29:** Detected wavelength versus arrival time, one panel per layout (glossy paper, whole-plate irradiation), on a shared logarithmic colour scale (number of photoelectrons). Configurations 1, 2, 2 (mod) and 3 populate a narrow band around the 457 nm blue scintillation spectrum; config 4 is green-shifted by the Y-11 WLS fibres. The time dependence of the mean wavelength traces the self-absorption of the shorter-wavelength light over the multi-bounce path (from 450.9 nm to 467.7 nm in the four direct configurations and from 471.8 nm to 507.7 nm in config 4, between the early and late arrival windows).

## 8 Position reconstruction from the SiPM pattern

The eight SiPMs of config 1 view the same scintillation event from eight directions. A natural question for a large-area muon trigger built this way is whether the *relative* pattern of the eight channels—their integrated charges, their arrival-time wavefronts, and the prompt fraction of their charge—carries enough information to localise the interaction point inside the plate. The

whole-plate irradiation of Sec. 5 is the data set that answers it: it samples the interaction point uniformly over the 250 mm×250 mm footprint and records, for every event, both the ground truth (the muon's first-entry position) and the complete per-SiPM photoelectron timestamp list.

### 8.1 What the eight channels measure

For every event the `sipmHits` tree carries, per SiPM $s \in \{0, \ldots, 7\}$, the number of detected photoelectrons $N_s$, the ordered arrival times $t_{(1),s} \le t_{(2),s} \le \cdots \le t_{(N_s),s}$ of the individual photoelectrons in the variable-length branch `tDetected`, the number of photoelectrons that arrived within 3 ns of the interaction $N_s^{\text{prompt}}$ (the prompt fraction), and the mean detected wavelength. These are the optical counterparts of the quantities a read-out chain provides: an integrated charge, a leading-edge or constant-fraction timestamp, and a pulse-shape parameter.

It is worth being explicit about what $N_s$ is, because the distinction matters for the electronics. $N_s$ counts *every* photoelectron detected in the channel over the whole event, so it is the *integral* of the light pulse delivered to that SiPM (multiplied by the gain), not the amplitude of the pulse peak. This is the natural choice: the integral carries the full Poisson statistics of the collected charge, whereas a peak-amplitude measurement uses only the prompt subset of the light and is additionally biased low by the spread of the photoelectron arrival times. In the present data the prompt fraction (photoelectrons arriving before 3 ns) is 53.0 % of the light for the bare plate, 33.7 % for the $TiO_2$ paint and only 15 % to 16 % for the two specular wrappers, so a peak-amplitude read-out would work with a small minority of the collected photons. No peak-amplitude observable is used anywhere in this section; the position information is extracted from pulse integrals and from arrival times.

Only the transverse position can be reconstructed: the muon is vertical and traverses the whole 10 mm thickness, so the light is produced along a vertical track and the side pattern carries no usable $z$ information (the corresponding path-length difference between the two faces of the plate is 10 mm, i.e. 0.05 ns, an order of magnitude below the timing signals below).

### 8.2 A better clock than the first photon

The simplest timing observable is the arrival time of the first photoelectron, $t_s^{\text{first}} = t_{(1),s}$. It is convenient, but it is a poor clock, for two reasons that act in opposite regimes. A channel that collects more photoelectrons triggers earlier simply because it has more chances to catch an early photon: the shift of the trigger time scales as $N_s^{-1/2}$, the same amplitude walk that a fixed-threshold discriminator suffers in an electronic chain. In the diffuse $TiO_2$ wrapper, where a corner muon delivers $\sim 68$ photoelectrons to the two sensors at that corner and only $\sim 6$ to the opposite sensors, this walk alone shifts $t^{\text{first}}$ at the bright sensors by several hundred picoseconds, with no relation whatsoever to the distance of the muon. In the opposite regime, a channel that collects only a handful of photoelectrons is timed by a single photon, and its trigger time fluctuates from event to event depending on whether one prompt photon happens to enter the sensor aperture on its first pass. The extreme-value statistics that quantify the first effect are collected in Appendix B.

The standard cure in an electronic read-out chain is a constant-fraction discriminator, which triggers not on the amplitude of the pulse but on the moment at which the pulse has reached a fixed fraction $\alpha$ of it [8]. The exact optical counterpart is the *wavefront time* of the channel: the time by which a fraction $\alpha$ of the light of that channel has arrived, i.e. the mean arrival time of the leading $\alpha$ fraction of its photoelectrons,

$$\bar{t}_{\le\alpha,s} = \frac{1}{q_s}\left(\sum_{j=1}^{m_s} t_{(j),s} + (q_s - m_s)\, t_{(\min(N_s,\, m_s+1)),s}\right), \qquad q_s = \max(1,\, \alpha N_s), \quad m_s = \lfloor q_s \rfloor. \tag{7}$$

Averaging over the leading photoelectrons removes the $N_s^{-1/2}$ amplitude walk, because every channel is then timed on the same fraction of its own pulse rather than on its first photon; and

it suppresses the single-photon shot noise, because the timing information is spread over the $\lceil \alpha N_s \rceil \approx 8$ photoelectrons of the prompt component instead of resting on one. Below we call this the *optical constant-fraction (CFD) time* of the channel.

We use $\alpha = 12.5\,\%$. The choice is dictated by the cavity physics of Sec. 7.2: in the specular wrappers the prompt, ballistic component carries 15 % to 16 % of the total pulse ($\sim$ 8–10 photoelectrons per channel) while the remaining 84 % to 85 % forms the spatially mixed multi-bounce reverberation tail ($t > 3\,\mathrm{ns}$). A high constant fraction such as $\alpha = 50\,\%$ therefore times the reverberating cavity tail rather than the ballistic wavefront and progressively washes out the timing information, whereas $\alpha = 12.5\,\%$ integrates across the ballistic rising edge just below the reverberation transition.

That argument is checked directly in Fig. 30, which measures the reconstruction error as a function of $\alpha$ over $\alpha = 3\,\%$ to $50\,\%$ for all four wrappers. The result confirms the picture and shows that the choice is not critical: over the whole range 3 % to 20 % the error of the learned estimator changes by less than 6 % (e.g. 16.9 mm at $\alpha = 3\,\%$ and 16.2 mm at $\alpha = 12.5\,\%$ for the glossy wrapper), and the nominal value is within 1 % of the best one over the scanned range. The position of that minimum is not resolved more precisely than about $\alpha = 12.5\,\% \pm 2.5\,\%$: the differences between neighbouring points near the bottom of the curve ($\lesssim 1\,\%$) are of the order of the statistical precision of the error itself (about 1 % with 5000 test events). The transparent linear read-out is more sensitive, because in the two specular wrappers it is the only channel that carries the position information: there the error has a clear minimum at $\alpha \simeq 10\,\%$ to 15 % and grows by a factor $\sim 1.5$ at $\alpha = 50\,\%$ (from 182 mm to 279 mm in glossy paper), which is exactly the loss of timing sensitivity when the constant fraction reaches the reverberation tail. The bare plate and the diffuse paint, whose positions are set by the light sharing and not by the timing, are flat in $\alpha$ throughout. At $\alpha = 50\,\%$ the learned estimator still keeps most of its resolution (from 16.2 mm to 16.4 mm in glossy paper), because the charges and the prompt share continue to carry the position information, whereas the transparent timing read-out loses half of its sensitivity.

Panel (a) of the figure measures what the argument is actually about: the width of the CFD time difference at fixed muon position. For the bare plate and for the diffuse paint it is flat over the whole scan (1.38 ns $\to$ 1.34 ns and 0.89 ns $\to$ 0.85 ns between $\alpha = 3\,\%$ and 50 %), as expected when the arrival-time spread is set by the light sharing rather than by the ballistic wavefront. For the two specular wrappers the same width grows by about 70 % (glossy paper 0.39 ns $\to$ 0.68 ns, air-backed aluminium 0.39 ns $\to$ 0.67 ns): beyond $\alpha \approx 20\,\%$ the wavefront time has become a tail time. That the linear resolution nevertheless *improves* up to $\alpha \approx 15\,\%$ (panel b) shows that it is not the width alone that sets the resolution: over the same range the opposite-pair slope $|\mathrm{d}T_{\mathrm{CFD},x}/\mathrm{d}x|$ grows from $0.0018\,\mathrm{ns\,mm^{-1}}$ to $0.0029\,\mathrm{ns\,mm^{-1}}$ (glossy), i.e. faster than the width, and only the ratio of the two — the resolution itself — has an interior minimum. Neither quantity alone is therefore a good tuning criterion: the pulse width would drive $\alpha$ to its smallest scanned value, the slope to $\alpha \approx 20\,\%$.

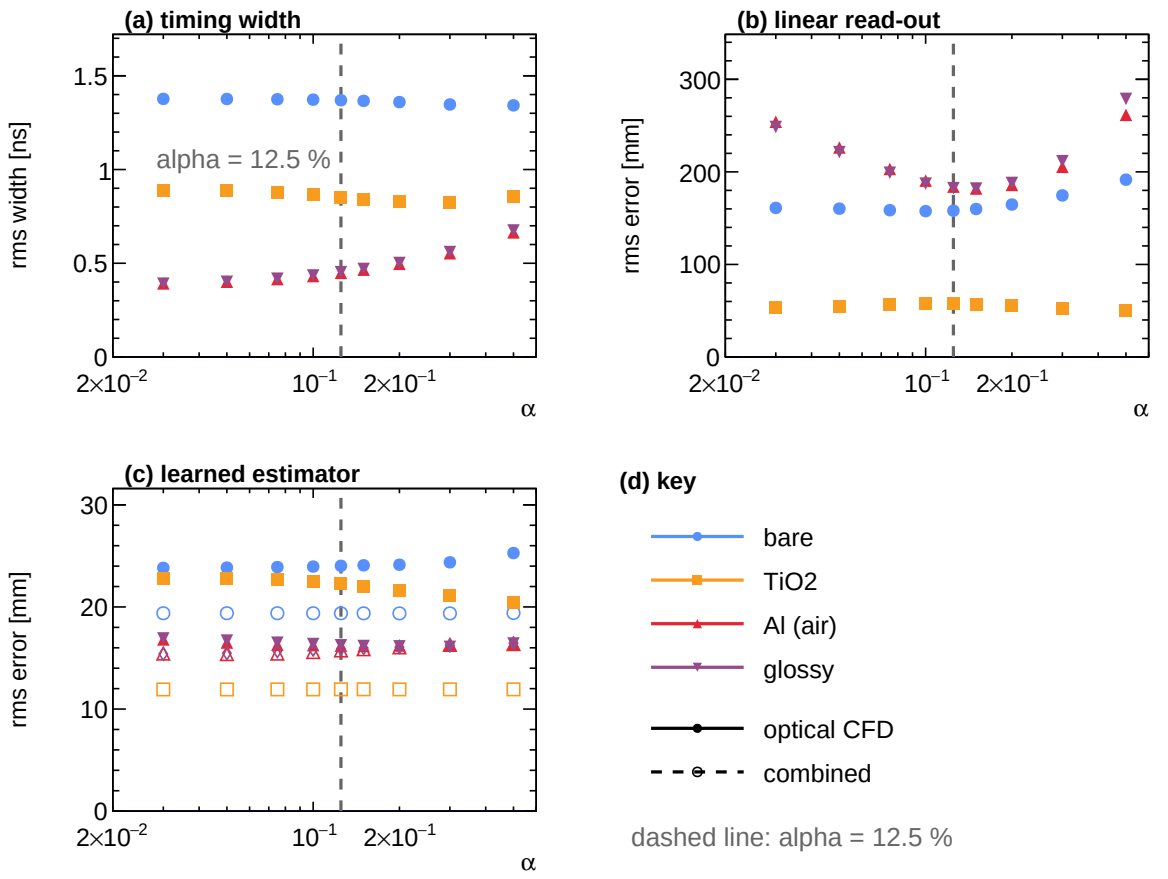



**Figure 30:** Position resolution as a function of the constant fraction $\alpha$ of the optical CFD time, one curve per wrapper. (a) The width of the CFD time difference at fixed muon position, i.e. the rms of $T_{\mathrm{CFD},x}$ pooled within 25 mm bins of $x$ — the quantity a constant fraction is normally tuned on: it is flat for the bare plate and the diffuse paint, and it grows by about 70 % for the two specular wrappers, whose wavefront time gradually becomes a tail time. (b) The transparent linear opposite-pair read-out. (c) The learned eight-channel estimator, with the optical CFD channel (filled markers, solid lines) and the combined estimator (open markers, dashed lines). (d) Key. The dashed vertical line marks the nominal $\alpha = 12.5\,\%$. The learned estimator is almost insensitive to the choice of $\alpha$, while the linear timing read-out of the two specular wrappers has a clear minimum near $\alpha = 10\,\%$ to $15\,\%$ and degrades by a factor $\sim 1.5$ once the fraction reaches the multi-bounce reverberation tail.

Pairing the wavefront onset $t_{(1),s}$ with the leading-$\alpha$ wavefront mean $\bar{t}_{\leq\alpha,s}$ captures *two* physical characteristics of the pulse in each channel: the arrival time of the ballistic wavefront and its *optical rise time*

$$\Delta t_{\mathrm{rise},s} = \bar{t}_{\leq\alpha,s} - t_{(1),s}, \tag{8}$$

which measures the temporal dispersion of the rising edge (steep for a sensor receiving a direct burst from a nearby muon, and broad for a distant sensor accumulating multi-bounce light).

### 8.3 Two ways to localise the muon

Two families of estimator are evaluated on the whole-plate dataset. The first is transparent and purely analytic: the *opposite-pair* observables

$$A_x = \frac{N_{\mathrm{right}} - N_{\mathrm{left}}}{N_{\mathrm{right}} + N_{\mathrm{left}}}, \qquad T_x = \bar{t}_{\mathrm{right}} - \bar{t}_{\mathrm{left}}, \qquad T_{\mathrm{CFD},x} = \bar{t}_{\leq 12.5\%,\mathrm{right}} - \bar{t}_{\leq 12.5\%,\mathrm{left}}, \tag{9}$$

formed from the two SiPMs on the right and the two on the left edge (and the analogous $A_y$, $T_y$, $T_{\mathrm{CFD},y}$ for the bottom and top edges). $N_{\mathrm{right}}$ and $N_{\mathrm{left}}$ are the summed pulse integrals of

the two channels on each edge, while $\bar{t}_{\mathrm{right}}$ and $\bar{t}_{\leq 12.5\%,\mathrm{right}}$ are the edge-averaged first-arrival and 12.5 % wavefront times. All three observables are odd functions of the coordinate $x$, so a linear fit against $x$ measures the first-order response slope $\partial O_x/\partial x$ and rms residual $\sigma_O$, yielding an implied linear resolution $\sigma_x = \sigma_O/|\partial O_x/\partial x|$.

Because the eight-channel pattern in a rectangular light guide is strongly non-linear—particularly in the timing channel and near the plate corners—a linear combination of opposite edges extracts only a fraction of the available information. The second estimator therefore learns the inverse map $\mathbf{f} \mapsto \mathbf{y} = (x, y) \in [-L, L]^2$ ($L = 125\,\mathrm{mm}$) non-parametrically from a calibration training set of size $N_{\mathrm{tr}} = 20\,000$ (80 % of the 25 000 whole-plate events), and is evaluated on the held-out test set of size $N_{\mathrm{te}} = 5000$. In words: for a new event, the estimator looks for the $k = 40$ calibration events whose eight-channel pattern looks most similar, and returns their (known) positions, averaged with a weight that falls off with the distance in pattern space,

$$\hat{\mathbf{y}}_t = \frac{\sum_{m=1}^{k} w_m \, \mathbf{y}_{i_m}}{\sum_{m=1}^{k} w_m}, \qquad w_m = K\!\left(\frac{d_m}{h}\right), \qquad K(u) = (1-u^3)^3\,\Theta(1-u), \tag{10}$$

where $d_m$ is the distance of the $m$-th neighbour in pattern space, $h$ is the distance of the farthest of the $k$ neighbours, and $\mathbf{y}_{i_m}$ is the position of that neighbour, rotated or reflected into the frame of the event by the symmetry that matched the two patterns.

Four ingredients make this work, and each of them has a plain reading:

1. **The pattern is used in relative terms.** The eight charges enter as shares of the total charge of the event, the eight arrival times as differences to the mean arrival time of the eight channels. The total light yield and the time of the interaction therefore cancel identically, and only the *shape* of the pattern carries the position.
2. **Each quantity is rescaled to a common spread** before the distances are computed, so that a quantity with a large spread cannot dominate the comparison merely because of its units.
3. **The eight symmetries of the square plate are used.** A pattern measured in a corner of the plate has eight equivalent versions (four rotations, four reflections), and so does every calibration event. Comparing a new pattern against all eight versions of every calibration pattern multiplies the effective density of the calibration set by eight, which is what makes the corners and the edges of the plate as well determined as its centre.
4. **Uninformative information is down-weighted.** In a specular wrapper the pulse integrals carry no position information, and including them with the same weight as the arrival times would bury the informative part of the pattern in noise. Each block of the pattern therefore enters with a weight set by its own reconstruction error, so that a block that does not help is suppressed automatically.

The formal definitions of the pattern blocks, of the symmetry-augmented distance and of the block weights are collected in Appendix B.

### 8.4 What the eight channels see

Figure 31 shows the per-SiPM arrival-time waveforms for two extreme populations: a muon in the centre of the plate ($|x|, |y| \leq 15\,\mathrm{mm}$, 371 events for the glossy wrapper) and a muon in the top-right corner ($x, y \geq 90\,\mathrm{mm}$, 437 events, i.e. the corner between the T1 and R2 sensors). Each curve is the mean number of photoelectrons per 0.2 ns bin.

For the central muon the eight waveforms are indistinguishable: every SiPM receives the same light at the same time, and the light share of the eight channels is within 0.3 percentage points of the uniform expectation (12.5 % each). For the corner muon the pattern changes completely, and it does so *differently for the two wrappers*. With the diffuse $TiO_2$ paint the two sensors at the corner (T1 and R2) collect 36.74 % and 36.89 % of the light instead of 12.5 %—nearly three times the share of a central muon and about nine times that of the opposite sensors—their pulses arrive 1.62 ns–1.64 ns earlier than the event mean in first-hit time (1.41 ns–1.42 ns earlier in the

12.5 % optical CFD wavefront), and the remaining six sensors are starved. With the specular glossy paper the light is mixed so thoroughly by the total-internal-reflection guide that the light share changes by at most 1.5 percentage points, but the arrival wavefronts separate by more than a nanosecond across the eight channels.

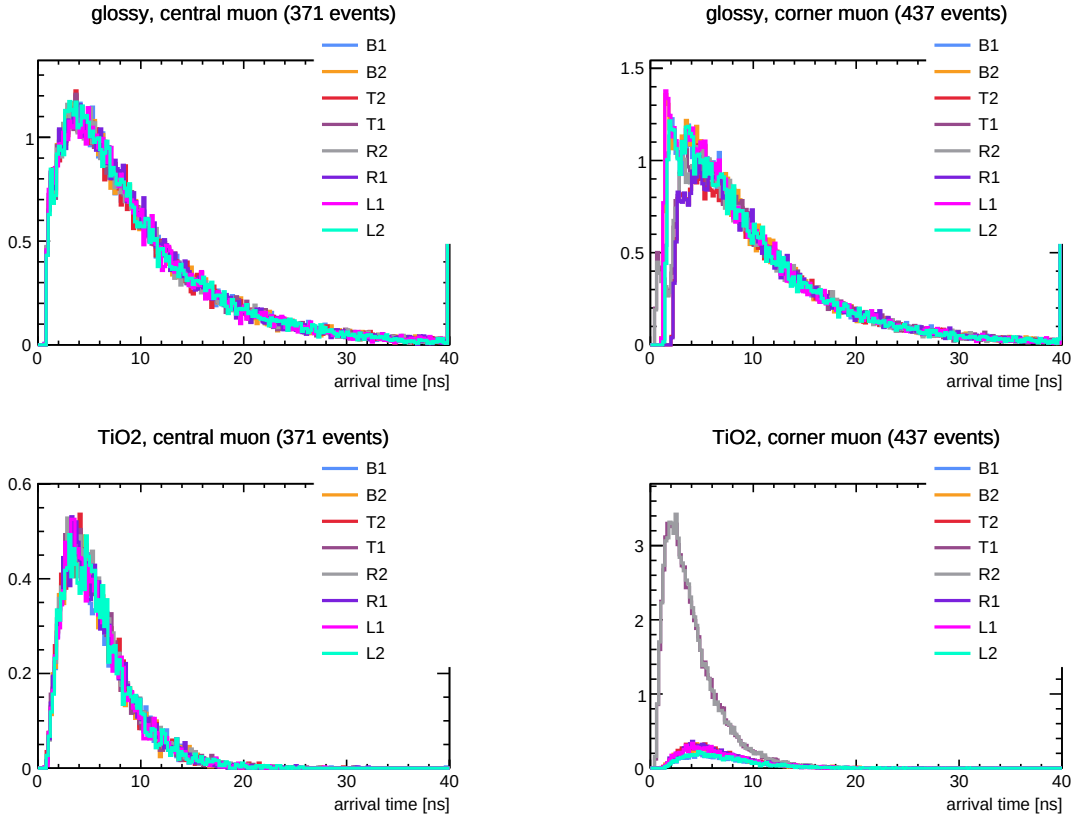



**Figure 31:** Per-SiPM arrival-time waveforms of the config-1 read-out for a muon in the centre of the plate and for a muon in the top-right corner, for the two wrappers that behave most differently. Each curve is the mean number of photoelectrons in a 0.2 ns bin, averaged over 371 (centre) and 437 (corner) events of the whole-plate irradiation; the sensor names follow Fig. 1. For the central muon the eight waveforms lie on top of one another for both wrappers. For the corner muon the diffuse $TiO_2$ paint sends a large and early pulse to the two sensors at that corner (T1, R2) and starves the other six, whereas the specular glossy paper leaves the integrated charges almost untouched while separating the rising wavefronts in time.

Figure 32 quantifies both effects side by side, comparing the first-hit offset $t_{(1),s} - \bar{t}_{(1)}$ (orange bars) directly against the 12.5 % optical CFD wavefront offset $\bar{t}_{\leq 12.5\%,s} - \bar{\bar{t}}_{\leq 12.5\%}$ (red bars) in the right-hand panels. Two physical features stand out:

- In **$TiO_2$** (bottom row), the corner population shows light-share deviations of +24.24 and +24.39 percentage points for T1 and R2 against −7.45 to −9.21 for the other six. In the timing panel, moving from $t_{(1),s}$ (orange) to the 12.5 % optical CFD wavefront (red) reduces the offset of T1 and R2 from −1.62 ns to −1.41 ns and of the far corner sensors B1 and L2 from 0.97 ns to 0.83 ns: removing the $N_s^{-1/2}$ order-statistic amplitude walk of Appendix B strips out the portion of the $t_{\text{first}}$ shift that was merely a reflection of the 9× charge ratio.
- In **glossy paper** (top row), the 12.5 % optical CFD wavefront (red) *enhances* the timing contrast relative to $t_{\text{first}}$ (orange): the earliest offsets grow from −0.43 ns and −0.43 ns to −0.53 ns and −0.56 ns (at B2 and L1), while the latest offsets grow from 0.70 ns and 0.73 ns to 0.73 ns and 0.77 ns (at T2 and R1). Notice also which sensors are earliest for a top-right corner muon (+100, +100) in a polished specular guide: because the scintillator-to-grease interface ($n = 1.58 \to 1.46$) has a critical angle of $\theta_c = \arcsin(1.46/1.58) = 67.5°$, rays emitted from (+100, +100) toward T1 (+62.5, +125) and R2 (+125, +62.5) strike the narrow face at grazing

incidence ($\theta_{\text{inc}} \geq 56.3°$, or $74.1° > \theta_c$ after one corner bounce) and suffer strong Fresnel/TIR rejection at the grease pad, whereas rays travelling straight across the plate to the collinear opposite-wall sensors B2 $(+62.5, -125)$ and L1 $(-125, +62.5)$ arrive at near-normal incidence ($\theta_{\text{inc}} \approx 9.5°$) with high transmission. This non-monotonic grazing-angle optics is precisely why a linear opposite-pair difference struggles in a specular guide while the full eight-channel learned estimator succeeds.

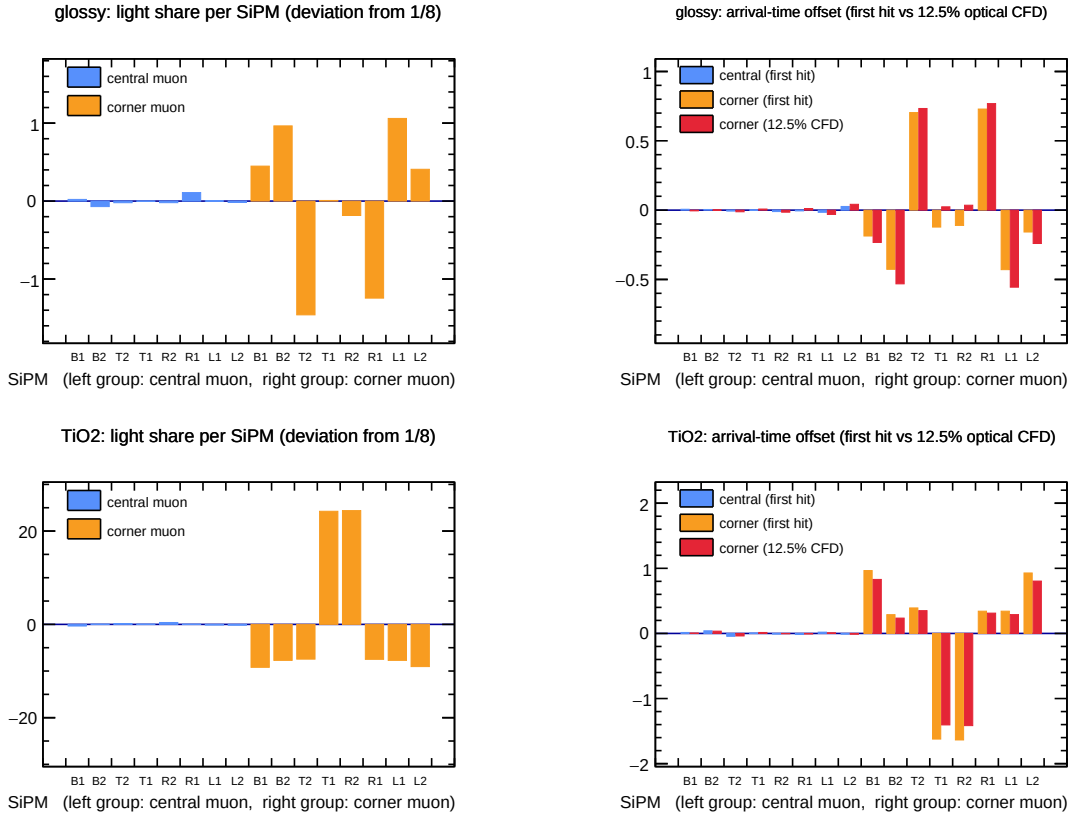



**Figure 32:** Per-SiPM observables for a central muon (left group of each panel) and a corner muon (right group), for the glossy (top row) and $TiO_2$ (bottom row) wrappers. *Left column:* light share of each SiPM as the deviation from the uniform 1/8 expectation, in percentage points. *Right column:* arrival-time offset of each SiPM relative to the eight-channel event mean, comparing the first-photoelectron time $t_{\text{first}}$ (orange) with the 12.5 % optical CFD wavefront time $\bar{t}_{\leq 12.5\%}$ (red), in nanoseconds. In $TiO_2$ the optical CFD removes the $N_s^{-1/2}$ amplitude-walk component of $t_{\text{first}}$; in glossy paper it sharpens the wavefront contrast across the eight channels.

### 8.5 Linear opposite-pair response: first hit versus optical CFD

Table 11 quantifies the linear read-out of Eq. 9, comparing the pulse-integral asymmetry $A_x$, the first-arrival difference $T_x$, and the 12.5 % optical CFD wavefront difference $T_{\text{CFD},x}$. For the $TiO_2$ paint the charge asymmetry is a clean, first-order position observable: $A_x$ changes by $7.40 \times 10^{-3}$ per millimetre, so that the 0.133 rms noise of $A_x$ corresponds to a position uncertainty of 18.0 mm along $x$ from a *single* ratio of two pairs of sensors. For the two specular wrappers the charge slope is $5 \times 10^{-5}$, i.e. two orders of magnitude smaller, because TIR mixing erases the first-order charge gradient.

Comparing the two timing columns of Table 11 shows the effect of the 12.5 % optical CFD directly:

- For the specular wrappers (**Al** and **glossy**), replacing $T_x$ ($t_{\text{first}}$) with $T_{\text{CFD},x}$ ($\bar{t}_{\leq 12.5\%}$) increases the linear timing slope by 55 %–60 %—from 1.71 ps mm$^{-1}$ to 2.66 ps mm$^{-1}$ (and to 3.23 ps mm$^{-1}$–3.25 ps mm$^{-1}$ for the point quantile $t^{\text{q}}_{12.5\%}$)—reducing the implied linear error

from 266 mm to 184 mm in aluminium and from 268 mm to 181 mm in glossy paper (and from 161 mm to 158 mm in the bare plate). This advantage is the value at the chosen constant fraction and is not a property of the wavefront time as such: with the scan of Fig. 30 the implied linear error of the glossy wrapper would be 221 mm at $\alpha = 5\,\%$ (a 17 % gain over the first-hit time instead of 32 %) and 279 mm at $\alpha = 50\,\%$, i.e. worse than the first-hit time itself. Choosing $\alpha$ just below the ballistic fraction is what makes the wavefront time beat the first photon at all.

- For **$TiO_2$**, where $t_{\text{first}}$ is artificially steepened by the $N_s^{-1/2}$ amplitude walk of the bright near-edge sensors, the optical CFD removes the amplitude-walk contribution, lowering the apparent slope magnitude from $17.4\,\text{ps}\,\text{mm}^{-1}$ to the true propagation slope of $15.2\,\text{ps}\,\text{mm}^{-1}$ while also reducing the rms timing noise from 0.91 ns to 0.87 ns.

**Table 11:** Linear response of the opposite-pair observables of Eq. 9 to the interaction position, for the four wrappers ($x$-direction; the $y$-direction is identical within statistical precision by four-fold symmetry). Shown are the pulse-integral asymmetry $A_x$, the first-arrival difference $T_x$, and the 12.5 % optical CFD wavefront difference $T_{\text{CFD},x}$. In each block the slope is the fitted response per millimetre, the noise is the rms residual from the linear fit, and $\sigma_x$ = noise/|slope| is the implied 1-D linear resolution. The final column gives the resolution of the full eight-channel learned estimator (Table 12) for comparison.

| | **Pulse integral $A_x$** | | | **First arrival $T_x$** | | | **Optical CFD $T_{\text{CFD},x}$** | | | **Learned** |
|---|---|---|---|---|---|---|---|---|---|---|
| Wrapper | slope [$\text{mm}^{-1}$] | noise | $\sigma_x$ [mm] | slope [$\text{ps}\,\text{mm}^{-1}$] | noise [ns] | $\sigma_x$ [mm] | slope [$\text{ps}\,\text{mm}^{-1}$] | noise [ns] | $\sigma_x$ [mm] | $\sigma_x$ [mm] |
| Bare | $4.54 \times 10^{-4}$ | 0.313 | 689 | 8.93 | 1.44 | 161 | 9.05 | 1.43 | 158 | 19.4 |
| $TiO_2$ | $7.40 \times 10^{-3}$ | 0.133 | 18.0 | −17.40 | 0.91 | 52.5 | −15.19 | 0.87 | 57.4 | 11.9 |
| Al (air) | $6.44 \times 10^{-5}$ | 0.090 | 1398 | 1.71 | 0.46 | 266 | 2.66 | 0.49 | 184 | 15.7 |
| Glossy | $5.57 \times 10^{-5}$ | 0.086 | 1545 | 1.69 | 0.45 | 268 | 2.71 | 0.49 | 182 | 15.9 |

For the bare plate the 12.5 % point quantile $t^{\text{q}}_{12.5\%}$ reaches a slope of $9.3\,\text{ps}\,\text{mm}^{-1}$ and an implied linear resolution of 153 mm, slightly better than the wavefront mean; in the two specular wrappers it is markedly worse (193 mm against 182 mm in glossy paper), because the $\lceil \alpha N_s \rceil$-th photon then falls in the low-density trough between the ballistic peak and the reverberation tail. The learned-estimator column quotes the combined multi-channel resolution of Table 12.

### 8.6 Performance of the learned estimator

Table 12 and Fig. 33 report the resolution of the symmetry-augmented learned estimator of Sec. 8.3 across five feature configurations on the 5000 held-out test events: *pulse integral* ($\mathbf{f}^{\text{amp}}$), *first arrival* ($\mathbf{f}^{\text{time}}$ using $t_{(1),s}$), *optical CFD (12.5 %)* (pairing the onset $t_{(1),s}$ and the 12.5 % wavefront mean $\bar{t}_{\leq 12.5\%,s}$, which encodes both the wavefront arrival time and the rising-edge slope $\Delta t_{\text{rise},s}$ of Eq. 8), *prompt fraction* ($\mathbf{f}^{\text{prompt}}$), and *combined* (all feature blocks weighted by the inverse-MSE metric of Appendix B).

**Table 12:** Position resolution of the config-1 read-out using the symmetry-augmented kernel $k$-NN estimator ($k = 40$), from the whole-plate irradiation of the *v6p5* campaign (25 000 events per wrapper: 20 000 training events augmented to 160 000 by the eight symmetries of the plate, and 5000 held-out test events). Entries give the rms reconstruction error $\sigma_x$ along one transverse axis in millimetres; $\sigma_r$ is the rms radial error of the best (combined) estimator and $r_{68}$ its 68 % radial containment radius.

| | **rms error along one axis $\sigma_x$ [mm]** | | | | | **Best** | | |
|---|---|---|---|---|---|---|---|---|
| Wrapper | pulse integral | first arrival | optical CFD (12.5 %) | prompt fraction | combined | best channel | $\sigma_r$ [mm] | $r_{68}$ [mm] |
| Bare | 22.6 | 23.8 | 24.0 | 22.6 | **19.4** | combined | 27.5 | 25.0 |
| $TiO_2$ | 12.3 | 22.6 | 22.3 | 14.2 | **11.9** | combined | 17.0 | 16.7 |
| Al (air) | 45.5 | 17.2 | 16.2 | 26.2 | **15.7** | combined | 22.6 | 21.6 |
| Glossy | 44.7 | 17.1 | 16.2 | 24.9 | **15.9** | combined | 22.1 | 20.7 |

Three improvements over an unweighted, non-symmetric $k$-NN baseline stand out:

1. **The eight symmetries of the plate sharpen every timing channel.** Even before changing the timing observable, using the eight symmetries of the square plate (increasing the effective training density from 20 000 to 160 000 patterns) substantially reduces the first-arrival error, leaving 23.8 mm in the bare plate, 22.6 mm in $TiO_2$, 17.2 mm in air-backed aluminium and 17.1 mm in glossy paper: the corners and the edges of the plate, where the density of calibration patterns is lowest, are the regions that benefit most.
2. **Optical CFD (12.5 %) outperforms first-arrival timing in all three reflective wrappers.** Adding the 12.5 % optical CFD wavefront to capture both the arrival onset and the rising-edge slope $\Delta t_{\mathrm{rise},s}$ lowers the timing-only error $\sigma_x$ further: from 17.1 mm to 16.2 mm in glossy paper ($\sigma_y = 15.4$ mm, radial rms $\sigma_r = 22.1$ mm), from 17.2 mm to 16.2 mm in aluminium ($\sigma_r = 23.2$ mm), and from 22.6 mm to 22.3 mm in $TiO_2$.
3. **Inverse-MSE block weighting makes the `combined` estimator strictly optimal for every wrapper.** Whereas an unweighted concatenation of charge and timing was previously degraded by the noisy blocks, the relevance-weighted metric of Appendix B achieves the best resolution across the board in the `combined` column: 11.9 mm per axis ($\sigma_y = 12.2$ mm, $\sigma_r = 17.0$ mm, $r_{68} = 16.7$ mm) for $TiO_2$, 15.9 mm ($\sigma_y = 15.4$ mm, $\sigma_r = 22.1$ mm, $r_{68} = 20.7$ mm) for glossy paper, 15.7 mm ($\sigma_r = 22.6$ mm, $r_{68} = 21.6$ mm) for air-backed aluminium, and 19.4 mm ($\sigma_r = 27.5$ mm, $r_{68} = 25.0$ mm) for the contact-limited bare plate.

The physical dichotomy of Sec. 5.3 remains the organising principle: the diffuse paint localises the muon primarily through light sharing (12.3 mm from pulse integrals alone, improved to 11.9 mm when combined with prompt charge and timing), whereas the specular wrappers carry no usable information in the full-event pulse integral (44–46 mm) but localise the muon to 15.7 mm–15.9 mm per axis via the optical CFD wavefront and prompt-light pattern.

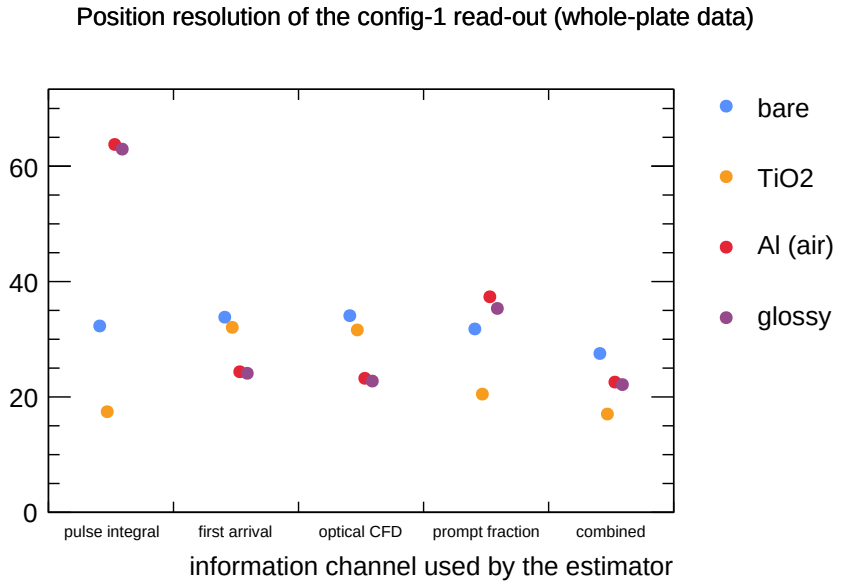



**Figure 33:** Rms radial reconstruction error $\sigma_r$ of the config-1 read-out across the five estimator channels and four wrapper treatments, on the 5000 held-out events of the whole-plate irradiation. In the reflective wrappers the 12.5 % optical CFD channel improves over single-photon first-arrival timing, and the inverse-variance-weighted `combined` estimator achieves the lowest error for every wrapper.

### 8.7 Response and resolution map

Figure 34 shows the response of the combined estimator: the mean reconstructed position in 25 mm bins of the true position, with the rms error of each bin as a vertical bar, against the one-to-one line. Because the symmetry-augmented training set populates all eight octants and edges symmetrically, the response follows the one-to-one diagonal closely across the plate, with

only a mild residual pull in the outermost 25 mm bin where the support of the $[-125, 125]$ mm prior is bounded on one side.

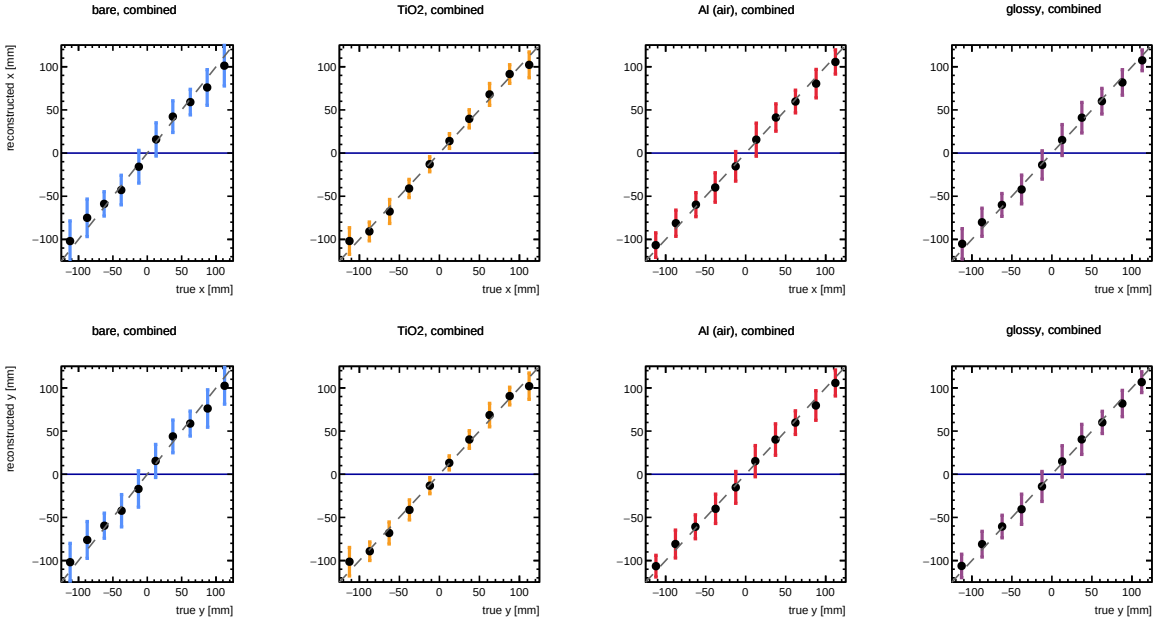



**Figure 34:** Position response of the learned estimator (`combined` channel of Table 12) for the four wrappers (rows: the two transverse coordinates; columns: the wrapper). Each point is the mean reconstructed position in a 25 mm bin of the true position, with the rms error of the bin as a vertical bar; the dashed line is the one-to-one diagonal.

Figure 35 maps the rms radial error $\sigma_r(x, y)$ over the plate in 25 mm cells. For $TiO_2$ the resolution is 12 —-16 mm over most of the interior and reaches 24 —-30 mm in the four extreme corner cells; for glossy paper the symmetry-augmented optical CFD estimator keeps the error remarkably uniform across the plate (18 —-26 mm, with a plate-wide $r_{68}$ of 20.7 mm).

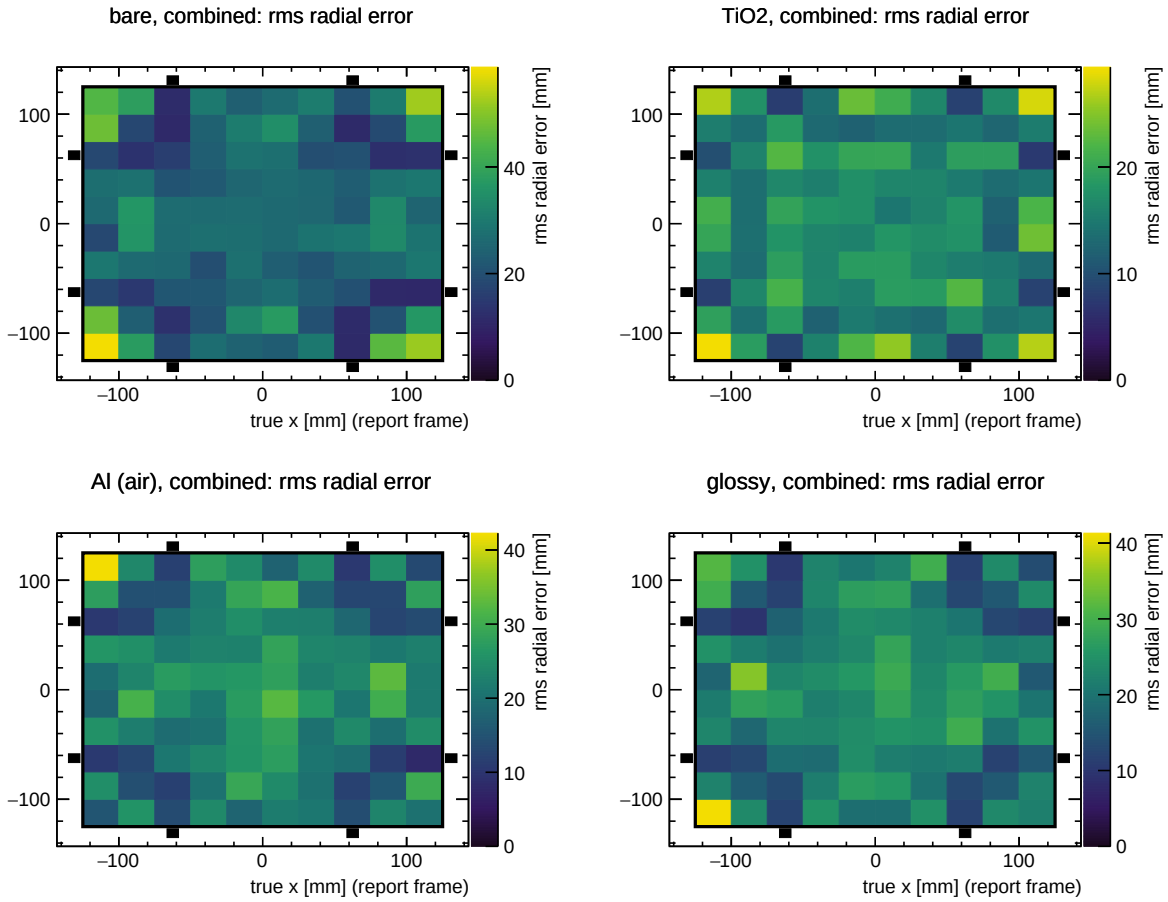



**Figure 35:** Map of the rms radial reconstruction error $\sigma_r(x, y)$ of the config-1 read-out (`combined` estimator) over the plate, in 25 mm cells, for the four wrappers (each panel on its own colour scale). The black squares mark the SiPM positions and the bold rectangle the slab outline.

### 8.8 What this would require in practice

The quoted resolutions are those of an idealised optical read-out, and the practical requirements are worth stating explicitly:

- **Which electronics are needed depends on the wrapper.** With a diffuse reflector the position comes from the light sharing, so the integrated charges of the eight channels suffice and no fast timing electronics are required (12.3 mm per axis from pulse integrals alone, 11.9 mm combined). With a specular wrapper the full-pulse integrals carry no position information and the localisation comes from the arrival-time wavefront and prompt-light share, requiring per-channel time digitisation (a TDC or fast waveform digitiser with $\lesssim 100$ ps resolution) to reach 15.7 mm–15.9 mm per axis.
- **The charge observable is the pulse integral, not the pulse amplitude.** The numbers above use the integrated charge of the whole light pulse, which is what a charge-integrating ADC or slow shaper delivers. A read-out recording only the peak of the shaped pulse would sample only the prompt subset of the light—53 % for the bare plate, 33.7 % for $TiO_2$ and 15 % to 16 % for the specular wrappers—and would incur higher Poisson noise. On the other hand, a *dual-gate* charge read-out (recording both a fast 3 ns prompt gate $N_s^{\text{prompt}}$ and the full-event integral $N_s$) already achieves 25 mm radial error in the specular wrappers even without sub-nanosecond timing.
- **Optical constant-fraction timing vs. first-photon timing.** While $t_{\text{first}}$ is an extreme order statistic susceptible to single-photon shot noise and $N_s^{-1/2}$ amplitude walk, the 12.5 % optical CFD wavefront $\bar{t}_{\leq 12.5\%,s}$ averages over the leading 12.5 % of photoelectrons in the

channel ($\sim 8$ photoelectrons in glossy paper and aluminium), making it directly analogous to a constant-fraction discriminator set near the leading edge of the prompt pulse and reducing the reconstruction error in all reflective wrappers.

- **The simulation contains no electronic imperfections.** There is no SiPM saturation, electronic noise, dark-count background, optical crosstalk, gain spread or front-end time jitter, and the PDE is applied exactly as tabulated. The reported resolutions therefore represent the fundamental optical limit of the config-1 geometry.
- **Symmetry-equivariant calibration in an experiment.** Because the eight symmetries of the square plate are a geometric property of the detector, a real calibration scan with a reference muon hodoscope can apply the same eight-fold folding (Appendix B), reducing the required calibration beam time by a factor of eight for a target statistical precision.

The practical conclusion is that a side-read-out muon trigger of this geometry can be operated as a two-dimensional position detector at the 12 mm to 18 mm level per axis (5 —-7 % of the plate width) without any modification to the optical hardware, provided the read-out electronics and reconstruction metric are matched to the wrapper's light-mixing regime.

### 8.9 What the eight-sensor read-out buys

The preceding results use the eight sensors of config 1. Two of the reduced layouts of Sec. 5 also have four channels, and replaying the same combined estimator on their whole-plate runs isolates the cost of removing half of the read-out. Config 2 keeps one sensor per side at the config-1 offsets (a pinwheel with fourfold rotational symmetry but no reflection symmetry), whereas config 2 (mod) places one sensor on each 45° corner face and therefore retains the full eight-element symmetry group of the square. Both data sets are the 25 000-event $v7$ whole-plate runs used above.

**Table 13:** Combined-estimator position resolution for the three four-sided read-outs, from the whole-plate $v7$ runs (25 000 generated events per wrapper). Entries are the rms error along one axis $\sigma_x$ with the radial rms $\sigma_r$ in parentheses, in millimetres. Config 2 (mod) retains 24 881 events per wrapper after requiring at least one detected photoelectron; the missing 119 muons per wrapper are the ones that miss the truncated corners.

| Layout | bare | $TiO_2$ | Al (air) | glossy |
|---|---|---|---|---|
| Config 1 | 19.4 (27.5) | 11.9 (17.0) | 15.7 (22.6) | 15.9 (22.1) |
| Config 2 | 33.1 (46.5) | 21.0 (29.4) | 31.4 (44.7) | 31.2 (44.3) |
| Config 2 (mod) | 29.9 (41.9) | 20.4 (28.6) | 27.8 (39.2) | 27.6 (39.1) |

Table 13 lists the corresponding $\sigma_x$ and $\sigma_r$, and Fig. 36 shows the $\sigma_x$ comparison. The penalty is largest for the two specular wrappers, where the position information is carried by the arrival-time pattern: $\sigma_x$ rises from 15.7 mm (Al) and 15.9 mm (glossy) in config 1 to 31.4 mm and 31.2 mm in config 2, and to 27.8 mm and 27.6 mm in config 2 (mod). The diffuse $TiO_2$ plate remains the best four-sensor wrapper, at 21.0 mm in config 2 and 20.4 mm in config 2 (mod), because its light sharing is already first order and does not need the extra channels to break the left–right ambiguity. The bare plate moves from 19.4 mm to 33.1 mm in config 2 and 29.9 mm in config 2 (mod). Even the worst four-sensor case remains a factor 2.2 better than the 72 mm rms of a uniform prior over the 250 mm plate, so four channels still carry genuine position information; they are simply not enough to reach the 12 mm to 18 mm level of the eight-sensor design.

Config 2 (mod) is consistently a little better than config 2 at the same sensor count (by 3 % to 12 %), and it is the fairer comparison with config 1 for sensor *number*, since both keep the full eightfold symmetry. The residual gap to config 1 is therefore the intrinsic cost of four instead of eight views of the event, not a shortage of training patterns.

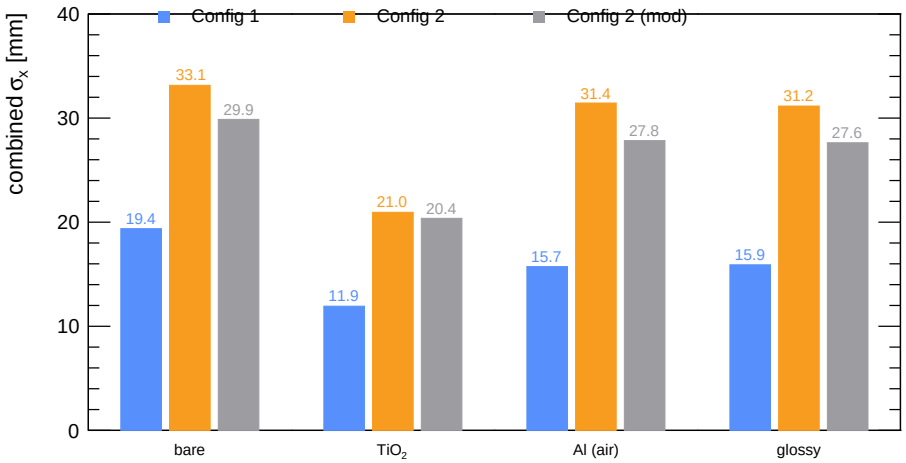



**Figure 36:** Combined-estimator rms error $\sigma_x$ along one axis for the config-1, config-2 and config-2 (mod) read-outs, one group of bars per wrapper. The two four-sensor layouts lose a factor 1.5 to 2.0 in resolution relative to the eight-sensor config 1, but the wrapper ordering ($TiO_2$ best, bare worst) survives. Config 2 (mod) is slightly better than config 2 in every wrapper; part of that difference is geometric (corner sensors and the full eightfold symmetry) and part is statistical (config 2 keeps only four of the eight symmetry operations, so its training set is 80 000 rather than 160 000 patterns).

## 9 Comparison with the measurement

This section puts the results of Sections 5–8 side by side with the statements of Ref. [1] listed in Sec. 2. Table 14 is the summary; Table 15 treats the one statement that is a threshold statement rather than an ordering.

**Table 14:** Simulation results against the statements of Ref. [1].

| Statement in Ref. [1] | Simulation result | Verdict |
|---|---|---|
| Configurations without a reflective layer consistently produce the lowest detected photon yield at the SiPMs | The contact-limited bare plate is the weakest wrapper in every layout, by a factor 6.5–6.9 in yield in the four direct-coupled layouts and 4.5 in config 4 | Reproduced in all five layouts |
| The signal-to-noise ratios are highest and nearly identical for the aluminium foil and the high-gloss paper | Air-backed aluminium reaches 91 % to 92 % of the glossy yield in the four direct-coupled layouts and 95 % in config 4 | Reproduced |
| The lowest detected photon yield occurs when the MCD is positioned at the corner of the plate | The corner is the dimmest patch for the bare plate, aluminium and glossy paper in the four Table IV layouts; for the diffuse $TiO_2$ paint the corner is the *brightest* patch in the four-sided layouts. Config 2 (mod) is not a test of this statement: its corner is instrumented, and there the corner is brightest for every wrapper | Reproduced for the paper's four layouts; contradicted for $TiO_2$ |
| All configurations except those without a reflective layer reach a detection efficiency of $\geq 80\,\%$ at the working threshold; the bare configuration is the only one that falls short | There is a non-empty threshold window in configs 1, 2, 2 (mod) and 3 in which the three reflective treatments exceed 80 % and the bare one does not | Reproduced (Table 15) |
| The WLS-fibre configuration produces a significantly higher detected photon yield than config 3 at all measurement positions | Config 4 reaches 87.0 $N_{\mathrm{pe}}$/event against 140.7 $N_{\mathrm{pe}}$/event for config 3, a factor 1.6 too few | Not reproduced (Sec. 11) |
| The WLS-converted photons still produce electrical signals with approximately 30 % efficiency | Not modelled: the simulation transports the WLS photons and applies the photocathode PDE, but contains no electronic chain | Out of scope |

### 9.1 The bare configuration and the detection-efficiency threshold

The statement about the 80 % threshold is the one that can be made quantitative without electronics, because the threshold enters the detection efficiency only through the requirement that an event deposit more than a certain number of photoelectrons. Writing $N_{\mathrm{thr}}$ for that number, the simulated detection efficiency of Eq. 1 is

$$\mathrm{DE}(N_{\mathrm{thr}}) = P\left(\sum_s N_s \;\geq\; N_{\mathrm{thr}}\right), \tag{11}$$

and the absolute value of $N_{\mathrm{thr}}$ corresponding to the experiment's 400 mV is not known (it depends on the SiPM gain, the electronics gain and the threshold setting). The statement itself, however, is *threshold-free*: it says that there *exists* a working threshold at which the three reflective treatments are above 80 % and the bare one is not.

Figure 37 shows the simulated curves of Eq. 11 for the four treatments of each layout, which have exactly the shape of the measured detection-efficiency curves of Fig. 11 of Ref. [1]: the

bare plate's curve is shifted far to the left, and the three reflective curves are nearly on top of one another. Table 15 lists, for each layout, the window of thresholds in which the experiment's statement holds. In the four directly-coupled layouts the window is non-empty and wide (58–130 photoelectrons for config 1, 26–56 for Config 2 (mod)), and it is empty only for config 4. There the bare plate is now the weakest wrapper, as in the other layouts, but its photoelectron distribution, set by the single SiPM behind the wavelength-shifting fibres, overlaps $TiO_2$'s closely enough that no threshold separates them at the 80 % level; the experiment also reports no bare config-4 measurement.

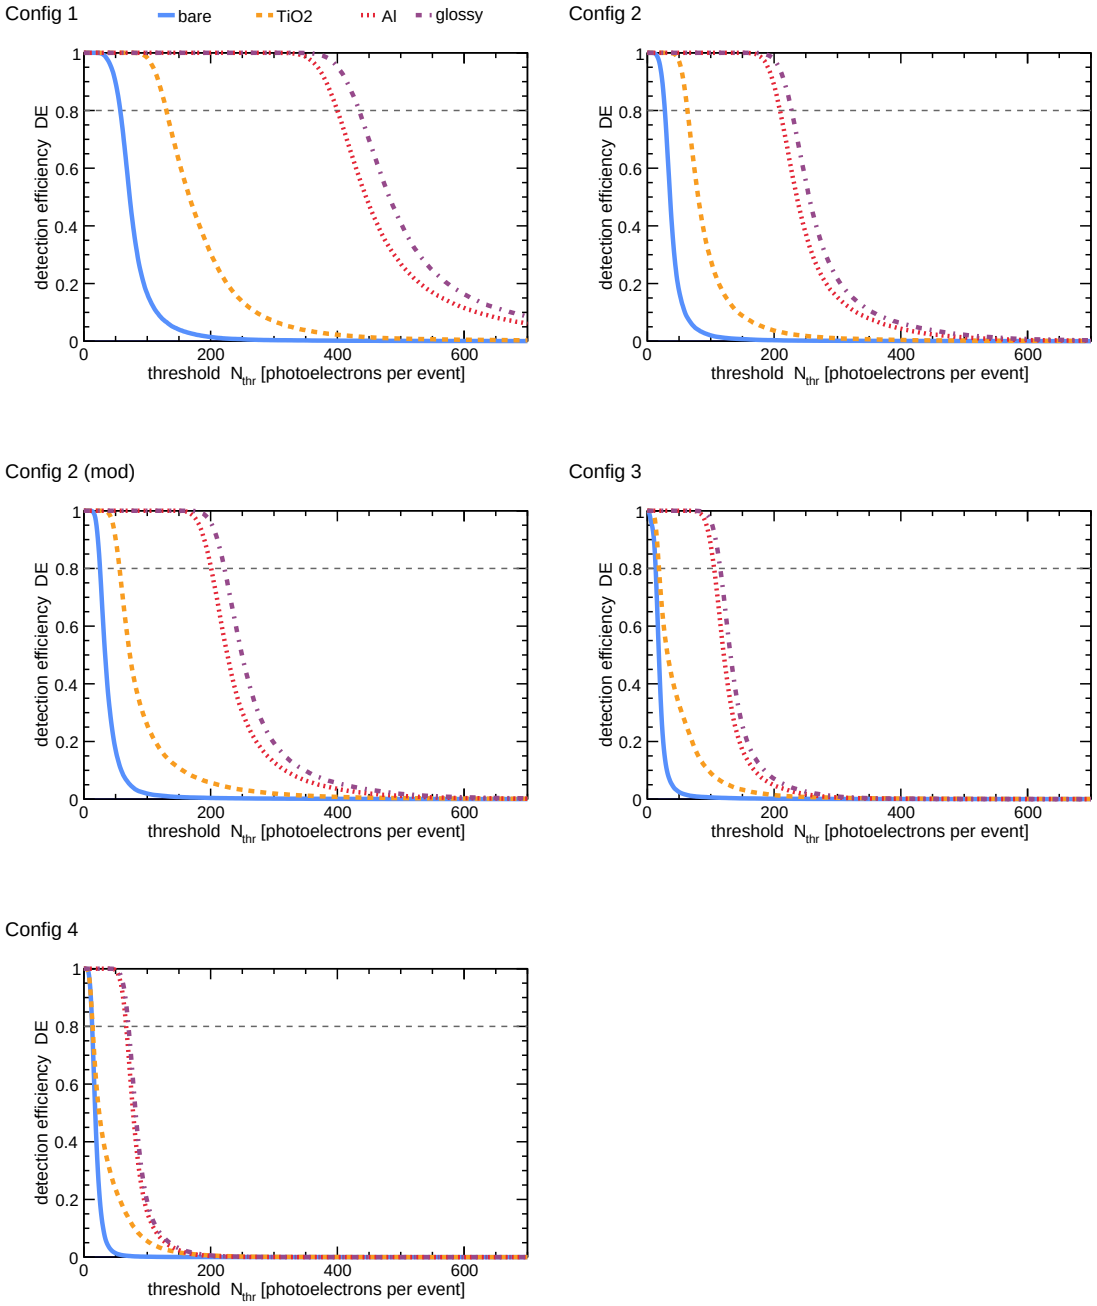



**Figure 37:** Simulated detection efficiency in the sense of Eq. 1 of Ref. [1], as a function of the threshold expressed in photoelectrons per event, one panel per layout and one curve per surface treatment (25 000 whole-plate events per panel). The dashed line marks the 80 % level of the experiment's criterion. The curve of the bare plate is shifted far to the left of the three reflective ones, which is the simulation counterpart of the measured statement that the bare configuration is the only one that fails the 80 % criterion at the working threshold. The horizontal scale is in photoelectrons, not in the millivolts of the experiment, because the electronics are not simulated.

**Table 15:** The window of photoelectron thresholds in which the three reflective treatments exceed the 80 % detection efficiency while the bare plate does not, for each layout. A non-empty window is the threshold-free form of the statement made in Ref. [1] that the bare configuration is the only one that fails the 80 % criterion at the working threshold.

| Layout | Window [pe/event] | DE(bare) | Note |
|---|---|---|---|
| Config 1 | 58–130 | 0.067–0.790 | statement holds |
| Config 2 | 28–63 | 0.083–0.788 | statement holds |
| Config 2 (mod) | 26–56 | 0.119–0.779 | statement holds |
| Config 3 | 14–18 | 0.510–0.752 | statement holds, narrow window |
| Config 4 | — | — | window empty; no bare measurement |

### 9.2 The one disagreement: the position trend of the diffuse paint

For three of the four treatments the simulation reproduces the measured sign of the position trend in the four Table IV layouts: the corner of the plate is the dimmest place, as reported in Ref. [1]. The diffuse $TiO_2$ paint is the exception. In the four-sided layouts 1 and 2 the corner patch is the *brightest* of the three, a factor 1.75 above the centre, and in the single-sided layouts 3 and 4 the centre is the brightest and the corner the dimmest, which is the measured sign.

Config 2 (mod) is outside this comparison because its corner is instrumented. There the corner patch is the brightest for all four treatments, including the bare plate and the two specular wrappers (corner/centre ratios 2.65, 3.58, 1.21 and 1.17). That is not a contradiction of the measurement but a direct confirmation of the nearest-sensor rule: the paper's corner is dim because it is far from every sensor, whereas here it lies about 27 mm from one.

The mechanism is the one of Sec. 6.3. A Lambertian paint is a poor light mixer, so the response tracks the distance to the nearest sensor. In a four-sided layout the corner patch is close to *two* sensors and is therefore the brightest, while the centre of the plate is the furthest point from any of the eight sensors and is the dimmest—which is what the three-patch scan of Table 7 shows ($6.398 \times 10^{-3}$ at the centre against $1.119 \times 10^{-2}$ at the corner). Config 2 (mod) is the limiting case: its corner is close to *one* sensor, but the centre is 168 mm from all four, so the corner is still the brightest and the centre the darkest. In a single-sided layout the same rule applies with a single collection site, and there the centre of the plate is closer to the sensor than the far corners are, so the sign of the trend is reversed.

The same rule explains why the paint is the *least* uniform wrapper ($\kappa_{2D} = 1.91$–$10.90$) while the specular wrappers are nearly flat, and why the paint is the only wrapper whose light sharing carries a first-order position signal. The disagreement with the measurement is therefore not a random discrepancy: it is a single, identified difference in how strongly the light is mixed, and it is confined to one treatment. The experiment's own report does not state which of the two competing effects dominates in the paint, so the discrepancy cannot be attributed from the published data alone; in the model, the sign is set by the number of sensors on the illuminated side of the plate.

## 10 What the design knobs are worth: a controlled design study

Everything up to here varies the *wrapper* of a fixed plate read out by a fixed set of SiPMs. The builder of such a monitor faces a different question: given a plate, a wrapper and a sensor budget, which change buys the most? The wrapper comparison cannot answer it, because all of those runs share one read-out layout and put the same treatment on all six faces. The four knobs that the model actually exposes are the finish of the four *narrow* faces, the SiPM active area, the arrangement of the sensors, and a wavelength-shifting fibre read-out on every face. This section isolates them.

Ten designs were run, each a single deliberate change from the v7 baseline, 25 000 whole-plate muons each, with identical beam, identical surface parameters ($f = 0.045$, air-backed aluminium

where a foil is present, $n_{\mathrm{coup}} = 1.55$) and identical optical tables. Table 16 states what each design changes and Table 17 collects the observables used below: the light yield, the *fractional* width of the per-event yield (its rms over its mean, which is what a threshold has to accommodate), the position contrast $\kappa_{2\mathrm{D}}$, the threshold at which the detection efficiency of Sec. 9 reaches 90 %, and two timing numbers. The last column, the per-axis position resolution $\sigma_x$, is the observable of Sec. 8 measured for each design in turn.

**Table 16:** The ten completed designs of the campaign. Every design changes one thing relative to the control (bottom row): the finish of the four 10 mm-tall narrow faces, the SiPM active area, the SiPM arrangement, or the read-out, which for the last four designs is a wavelength-shifting fibre clamp on every narrow face instead of SiPMs coupled to the plate. The two fibre pairs are deliberately confounded: the $TiO_2$-wrapped plate is read through a white Lambertian clamp, the glossy plate through a mirror clamp, because that is how each wrapper would actually be built. In the four-sided fibre layouts the read-out pads are displaced past the clamp, so there is *no* direct plate-to-SiPM path and the yield is a pure measure of the fibre path.

| Design | SiPMs | Large faces | Narrow faces | Read-out |
|---|---|---|---|---|
| C1 black edges | 8×4 mm, C1 | glossy | black | — |
| C8 black edges | 8×4 mm, C8 | glossy | black | — |
| C1 diffuse edges | 8×4 mm, C1 | glossy | diffuse | — |
| C1 6 mm, diffuse edges | 8×6 mm, C1 | glossy | diffuse | — |
| C8 6 mm, diffuse edges | 8×6 mm, C8 | glossy | diffuse | — |
| 4-sided WLS (4 ch), $TiO_2$ | 4×4 mm, 1/side | $TiO_2$ | $TiO_2$ | 4 clamps, single-ended |
| 4-sided WLS (8 ch, dual), $TiO_2$ | 8×4 mm, 2/side | $TiO_2$ | $TiO_2$ | 4 clamps, dual-ended |
| 4-sided WLS (4 ch), glossy | 4×4 mm, 1/side | glossy | glossy | 4 clamps, single-ended |
| 4-sided WLS (8 ch, dual), glossy | 8×4 mm, 2/side | glossy | glossy | 4 clamps, dual-ended |
| C1 control, glossy | 8×4 mm, C1 | glossy | glossy | — |

**Table 17:** The campaign in numbers, 25 000 events per design. $\langle N_{\mathrm{pe}} \rangle$ is the mean photoelectron count per event throughout the plate; $\sigma_{N_{\mathrm{pe}}}/\langle N_{\mathrm{pe}} \rangle$ its relative rms width; $\kappa_{2\mathrm{D}}$ the ratio of the brightest to the darkest 50 mm cell of the efficiency map; $N_{\mathrm{thr}}$ the per-event photoelectron threshold at which the detection efficiency reaches 90 % (this is the threshold that matters for a monitor, not the mean); the two timing columns are the fraction of the light arriving within 3 ns and the time that contains 90 % of it. $\sigma_x$ is the per-axis position resolution obtained from the design's own channel pattern with the estimator of Sec. 8.

| Design | $\langle N_{\mathrm{pe}} \rangle$ | $\sigma_{N_{\mathrm{pe}}}/\langle N_{\mathrm{pe}} \rangle$ | $\kappa_{2\mathrm{D}}$ | $N_{\mathrm{thr}}$ | $f(< 3\,\mathrm{ns})$ | $t_{90}$ [ns] | $\sigma_x$ [mm] |
|---|---|---|---|---|---|---|---|
| C1 black edges | 68.8 | 0.68 | 1.89 | 33.1 | 0.649 | 5.65 | 18.75 |
| C8 black edges | 61.3 | 0.76 | 3.01 | 32.4 | 0.647 | 5.65 | 17.41 |
| C1 diffuse edges | 339.6 | 0.28 | 1.14 | 265.6 | 0.249 | 11.85 | 19.85 |
| C1 6 mm, diffuse edges | 715.2 | 0.27 | 1.14 | 565.5 | 0.263 | 11.25 | 11.48 |
| C8 6 mm, diffuse edges | 708.9 | 0.28 | 1.33 | 550.2 | 0.263 | 11.25 | 11.78 |
| 4-sided WLS (4 ch), $TiO_2$ | 96.6 | 0.38 | 2.15 | 60.3 | 0.033 | 25.05 | 13.89 |
| 4-sided WLS (8 ch, dual), $TiO_2$ | 115.0 | 0.40 | 2.26 | 71.5 | 0.054 | 24.05 | 13.75 |
| 4-sided WLS (4 ch), glossy | 220.3 | 0.26 | 1.04 | 173.8 | 0.023 | 28.15 | 60.71 |
| 4-sided WLS (8 ch, dual), glossy | 273.0 | 0.26 | 1.06 | 216.3 | 0.036 | 27.55 | 55.23 |
| C1 control, glossy | 568.2 | 0.25 | 1.07 | 455.4 | 0.153 | 20.35 | 15.94 |

The control reproduces the v7 glossy value of 520.7 $N_{\mathrm{pe}}$/event to within 9 %; the difference is the coupling grease, whose refractive index is 1.55 here against the 1.46 default of the v7 runs (`setCouplingIndex`). A higher grease index widens the escape cone at the plate–pad interface and therefore raises the collected fraction, which is what the 9 % measures. The control is therefore the denominator for every "change" statement below, not the v7 number. The number of optical

photons produced in the plate agrees across the ten designs to within 1.4 % (19 322–19 598), a spread that is larger than the naive standard error of the mean but consistent with the heavy tail of the muon energy-loss distribution rather than with any difference in the optical model: the ten designs differ only in how the light is collected after it is made.

### 10.1 What the designs look like

The ten completed designs reduce to six distinct solid geometries, because only three of the four knobs change a shape: the sensor pattern (preset 1 places two 4 mm sensors per face at $u = \pm 0.5$, i.e. 62.5 mm from the corners; preset 8 at $u = \pm 0.75$, 31.25 mm from the corners), the sensor area (4 or 6 mm side), and the four-sided wavelength-shifting clamp with its single- or dual-ended read-out. Fig. 38 draws the three sensor patterns in the report frame and names the designs that use each; the sensor *positions* are to scale, the markers themselves are enlarged. The remaining axes are surface properties and change no solid: the narrow-face finish is a 5 µm strip, and the clamp surface, the coupling index and the wrapper are optical tables. No rendering can show them, and Table 16 is the only place where they are visible.


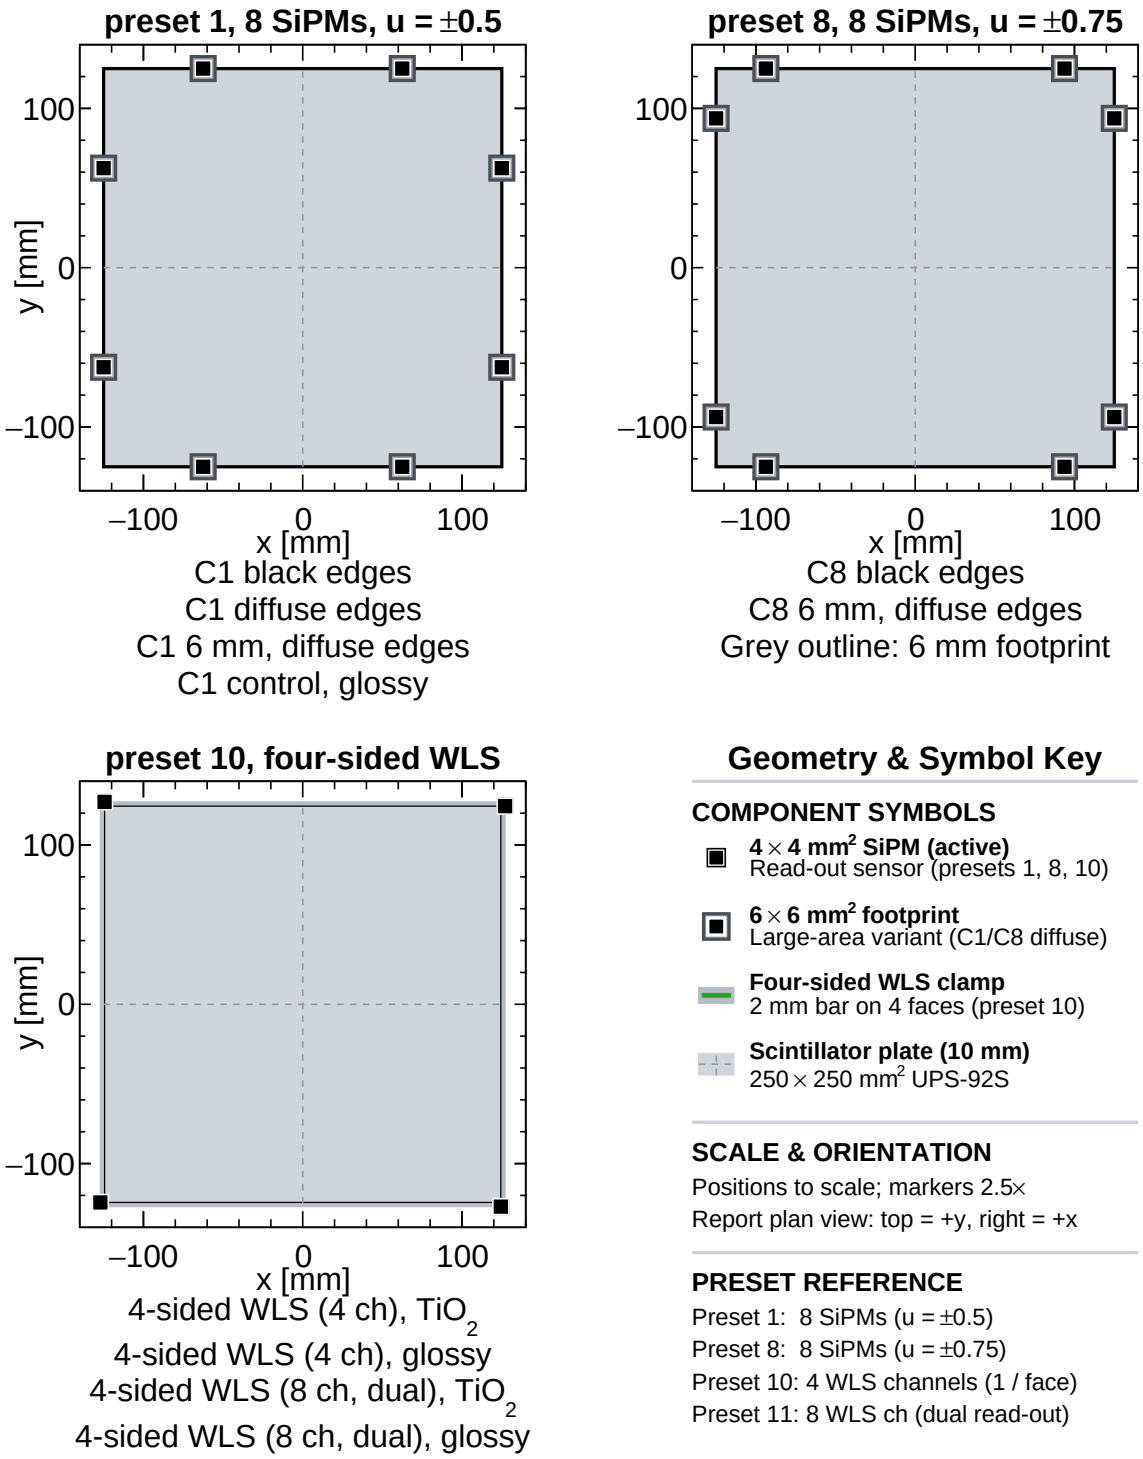



**Figure 38:** The three sensor patterns of the campaign, in the report frame (top $= +y$, right $= +x$). The sensor centres are to scale; the markers are drawn at 2.5 times their true edge length so that a 4 mm sensor still reads at print size. Panel 1 (preset 1) is shared by the C1 designs (black edges, diffuse edges, the 6 mm variant and the control); panel 2 (preset 8) by the C8 designs; panel 3 (preset 10) by the two 4-channel fibre designs and, with a second read-out at each far end, the two 8-channel dual-ended designs. Filled black markers are the 4 mm read-out sensors, each with a white outline; the darker grey outline marks the 6 mm footprint of the large-sensor variants. In the fibre panel the clamp runs along all four narrow faces. The fourth quadrant is a symbol and preset key, not a fourth layout.

Fig. 39 shows the three geometric differences at the scale at which they matter. A whole-plate view would not: a 4 mm sensor is 1.6 % of the plate width, so on a whole-plate panel it is a few

points across and the 6 mm variant differs from it by half of that. Panels (a) and (b) therefore look at a single sensor on the narrow face with a 26 mm field of view, from the same camera, so the only difference between the two is its area. Panels (c)–(e) look at a read-out corner of the fibre clamp; comparing (c) with (d) and (e) shows what the clamp hides — the four fibres, their 41 mm convergence into the bundle and the read-out pads all sit behind it, and only the exposed fibre ends remain visible at the corner.

Two caveats apply to these renders. They are visualisation geometry: the fibres are the faceted tessellated variant (24-gon core, square-section clamp channels), because the production analytic mitered tubes are built from `G4CutTubs`, whose boolean results carry no polyhedron and therefore cannot be drawn by the OpenGL driver. Centreline, radii, materials and surfaces are identical, but the faceted variant is the one measured 20 % lower in yield, so the renders show where the fibres are, not how much light they collect. Second, the clamp is drawn opaque: the absence of a cutaway plane is deliberate, since the head-less renderer does not support one.

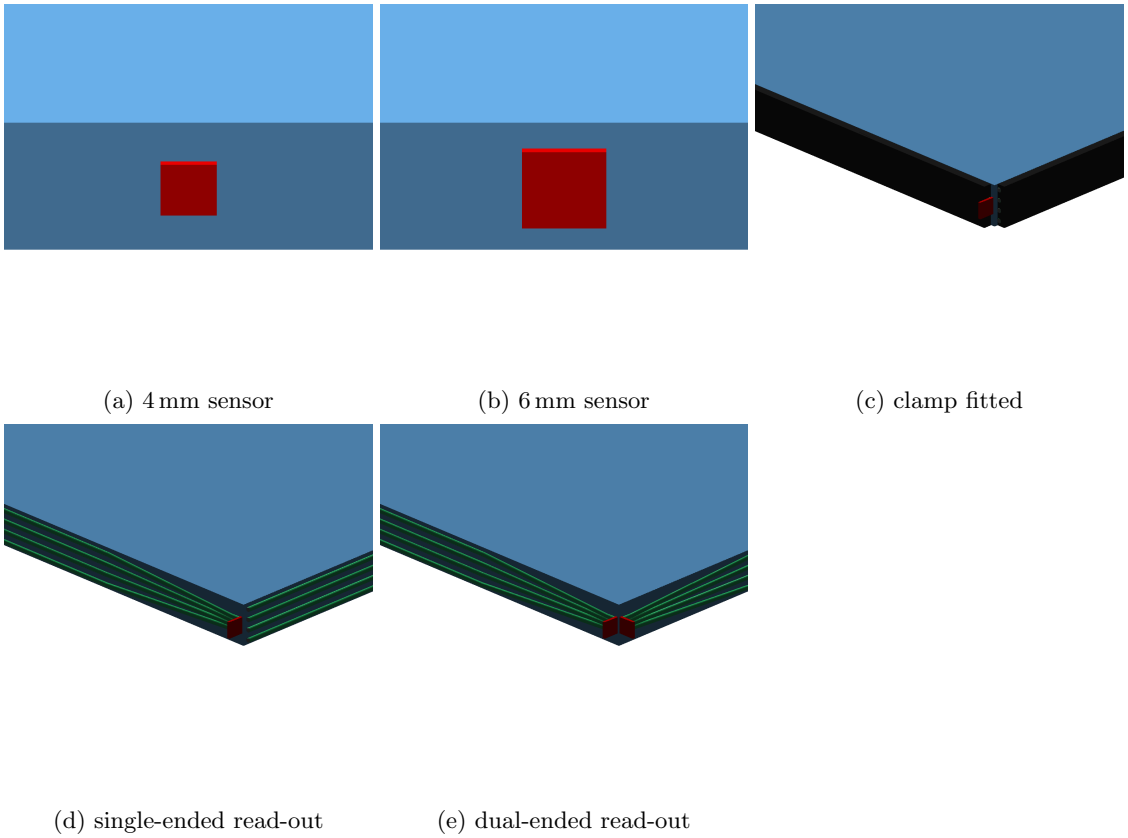

(a) 4 mm sensor (b) 6 mm sensor (c) clamp fitted

(d) single-ended read-out (e) dual-ended read-out

**Figure 39:** The geometric design differences at the scale at which they act. (a), (b) the same sensor position on the narrow face with 4 and 6 mm active area, identical camera, 26 mm across. (c) the four-sided clamp as built, opaque; (d) the same corner with the clamp, coupling film and grease hidden: four fibres converge into one read-out sensor, and the four far ends are mirror-capped; (e) the dual-ended layout, where the far bundle is instrumented as well. Colours: plate blue, fibres green, read-out sensors red, clamp near-black. The renders use the faceted visualisation fibres of Sec. 3.4; the campaign itself used the analytic tubes.

### 10.2 What each knob buys in light

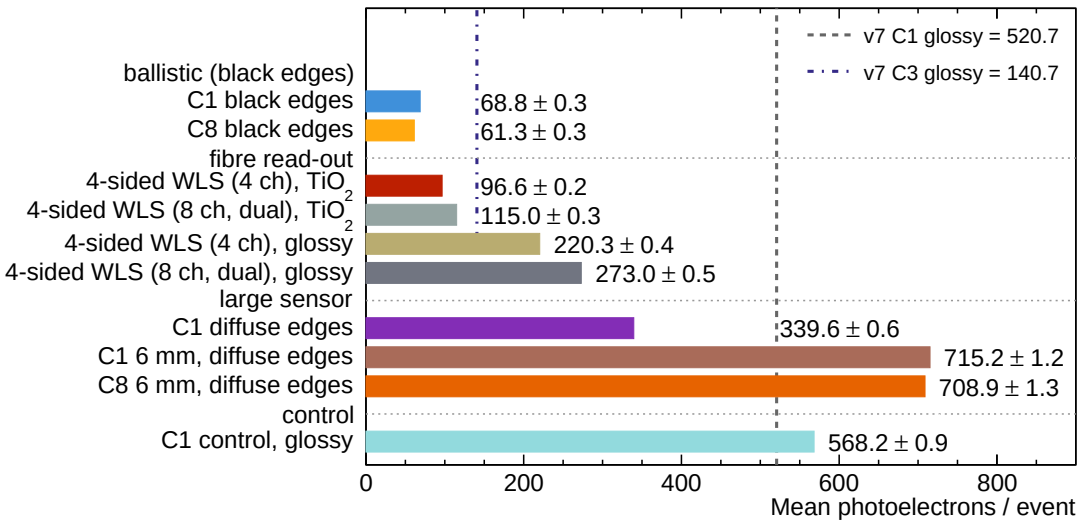



**Figure 40:** Light yield of the campaign designs, 25 000 whole-plate muons each, grouped by the question they answer. Bars are coloured by design, and the colour follows the same design in every figure of this section. The two vertical reference lines are the v7 whole-plate values for config 1 (glossy, 520.7 $N_{\mathrm{pe}}$, dashed) and config 3 (glossy, 140.7 $N_{\mathrm{pe}}$, dash-dotted), i.e. the directly-coupled plate and the single-sided fibre clamp that the campaign extends.

The four knobs are not remotely equivalent (Fig. 40). Blackening the four narrow faces costs 88 % of the light: 68.8 $N_{\mathrm{pe}}$/event against 568.2 for the control in layout 1, and 61.3 against 568.2 in layout 8. This is not a small-area effect that one might expect from the geometry—the narrow faces are only 7.4 % of the 135 000 mm$^2$ total surface—and the reason is the optics rather than the area. A photon trapped by total internal reflection at a large face necessarily travels at more than the critical angle (39.3°) from the plate normal, so its direction is dominated by its in-plane component; and a photon whose in-plane direction is within 39.3° of a narrow-face normal escapes at that face. For the strongly trapped population the two conditions coincide over essentially every azimuth, so the trapped light drains out of the narrow faces within a few crossings, and a black narrow face converts the drain into an absorber. The measured 12 % that survives is the light that reaches a SiPM before it makes that crossing.

Replacing the black faces with the diffuse paint recovers most of it but not all: 339.6 $N_{\mathrm{pe}}$/event, 60 % of the control. The paint returns 96 % of each encounter, so a single bounce is nearly free, but a Lambertian redirection sends the light back at a random angle and each subsequent crossing carries a fresh chance of being absorbed in the paint or lost elsewhere; the timing data of Sec. 10.4 confirm that the light in this design makes many more crossings than in the specular one. In light of this, the diffuse *narrow* face is a surprisingly expensive way to avoid a black one.

The SiPM area is the only knob with a near-unity return. Going from 4 mm to 6 mm sensors multiplies the yield by 2.11 in layout 1 and 2.09 in layout 8, i.e. it captures 94 % of the 2.25-fold area increase. The missing 6 % is the lower photon flux at the outer edge of the larger pad, and it is the same in both layouts, which is what one expects if the mechanism is the local light field rather than the read-out.

The fibre read-out on every face is the design that changes the most at once. With the glossy wrapper it delivers 220.3 $N_{\mathrm{pe}}$/event with one SiPM per side—1.57 times the single-sided config 3 (140.7) and 2.53 times the single-sided config 4 clamp (87.0) — and 273.0 $N_{\mathrm{pe}}$/event when both ends of every fibre bundle are read out, a further 1.24. With the $TiO_2$ wrapper the same step is worth 2.02 (47.9 to 96.6) and 1.19 (96.6 to 115.0). The paint gains more from being read on every face because a poorly mixing cavity loses most of its light to the faces that have no collector;

a fibre on every face removes that loss. None of the fibre designs, however, comes close to the directly-coupled plate in absolute yield: the best of them reaches 48 % of the control, and even that is with the mirror wrapper. The fibre path is expensive, and Sec. 10.4 shows where the price is paid.

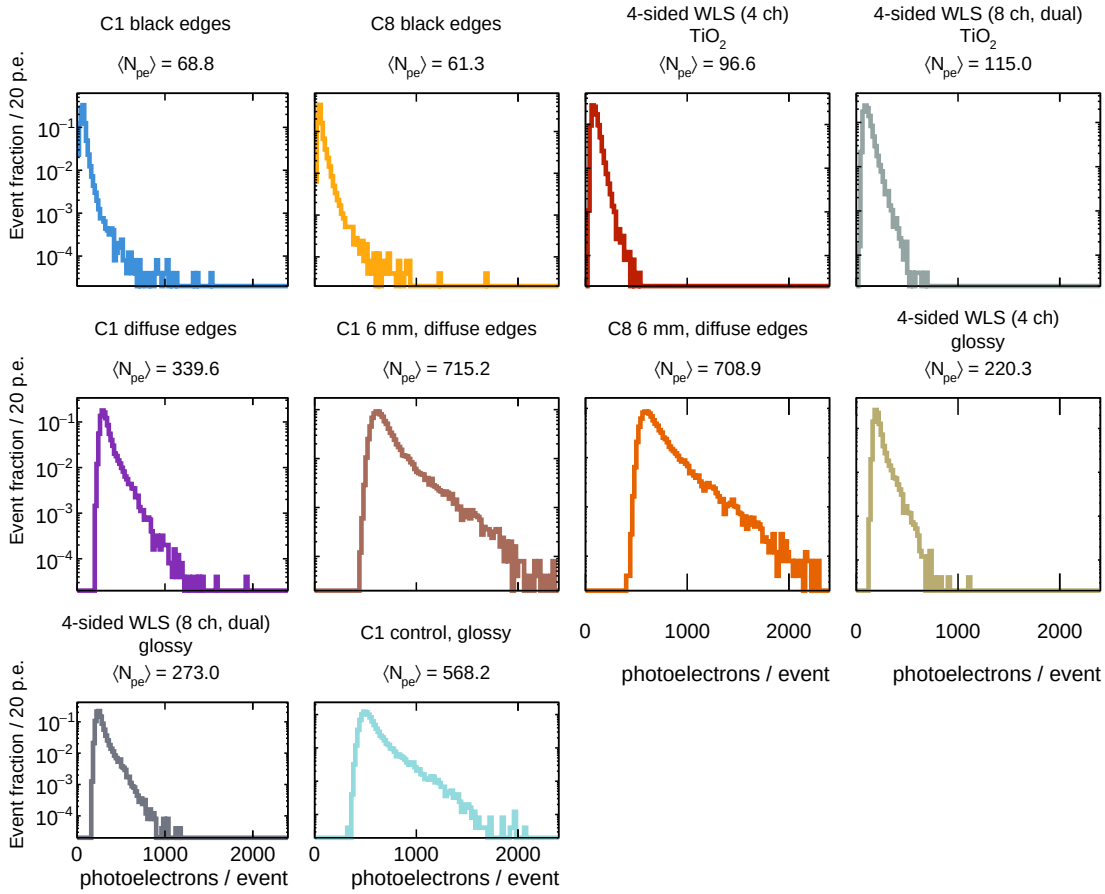



**Figure 41:** Per-event photoelectron spectra of the campaign designs, in a common abscissa range, normalised to unit area with a logarithmic ordinate. The mean is printed in each panel. Every event in the campaign records at least one photoelectron, so the zero-photoelectron bin is empty throughout and the distributions are not truncated. The panels are ordered as in Table 17.

The spectra (Fig. 41) show the second half of the story, which the mean alone hides: filling the plate with collectors does not only move the distribution to the right, it narrows it. The relative width of the per-event yield is 0.25 for the control, 0.26 for the glossy fibre designs, 0.27–0.28 for the diffuse-edge designs, 0.38–0.40 for the $TiO_2$-wrapped fibre designs, and 0.68/0.76 for the two black-edge designs. The absolute widths are the opposite: 144 photoelectrons in the control against 47 in the C1 black-edge design, because 25 % of a large mean is larger than 68 % of a small one. A monitor that has to set a threshold cares about the relative number, and there the black edge is the worst design of the ten.

That is not counting statistics. With 68.8 photoelectrons the Poisson term alone is 12 %, so the observed 68 % is dominated by something else: the muon energy-loss tail, which contributes a roughly common 25 % to every design, plus a geometric term specific to the ballistic read-out—where the track is, and how many crossings it makes before a photon finds a sensor. The two terms add in quadrature to the observed width, which puts the geometric term at 63 % for the C1 black-edge design. The same decomposition explains why the $TiO_2$-wrapped fibre designs are

wider (0.38, 0.40) than the glossy ones (0.26): the paint is a poor mixer, so the fraction of the light that reaches a fibre depends on where the track is, whereas the mirror clamp averages it out.

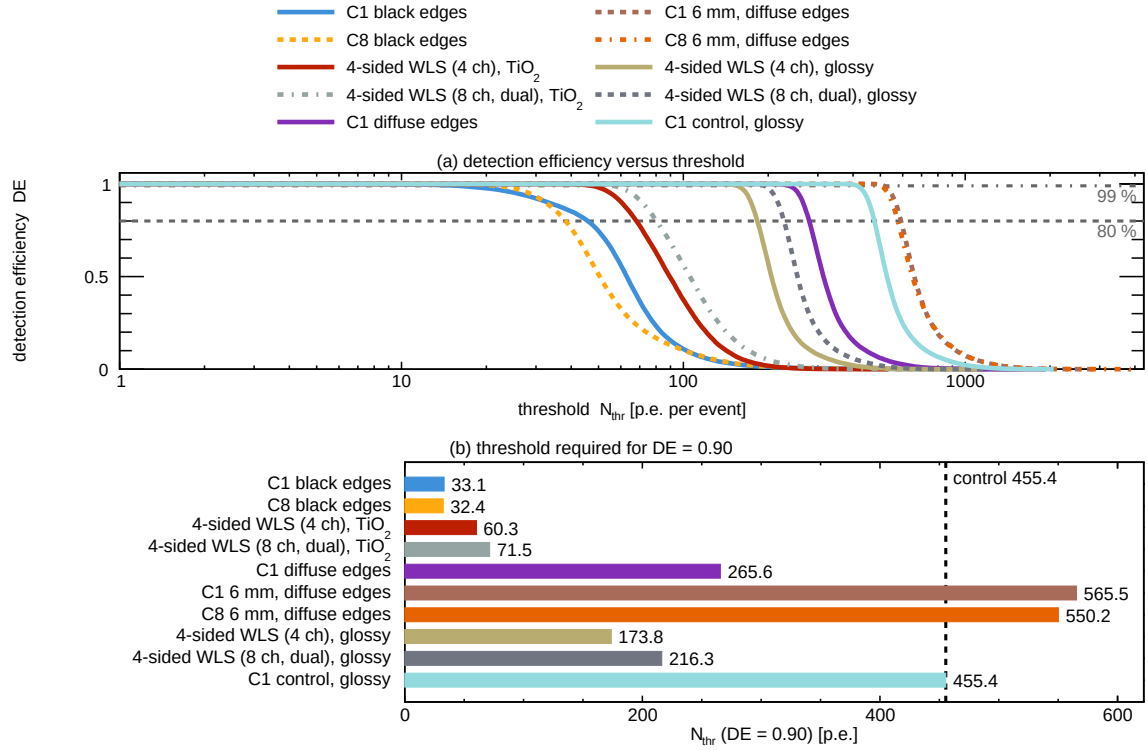



**Figure 42:** Detection efficiency in the form used for the measurement of Sec. 9: the fraction of the 25 000 events that record at least $N$ photoelectrons, as a function of $N$. Panel (a) shows the ten curves of the campaign designs; panel (b) gives, for each design and in the order of Table 17, the threshold at which the efficiency reaches 90 %, the number tabulated there as $N_{\mathrm{thr}}$; the dotted vertical line marks the control. Every design saturates at unity, because every event of the campaign records at least one photoelectron; the designs differ only in where the knee sits.

The threshold-free form of the question asked by the paper tells the same story (Fig. 42). The threshold at which the detection efficiency reaches 90 % lies at 78–80 % of the mean yield for six of the ten designs—both 6 mm designs, the control, the diffuse-edge design and the two glossy fibre designs—that is, for every design whose relative width is 0.25–0.28. The four exceptions are the designs with the widest distributions (Fig. 41): the black-edge designs reach 90 % at 48 % and 53 % of their mean, the $TiO_2$-wrapped fibre designs at 62 %. Setting a threshold is therefore not a free way to reject noise in those four designs, because their per-event light is spread too unevenly for a single cut to separate the bulk of the distribution from its tail.

### 10.3 Where the light goes

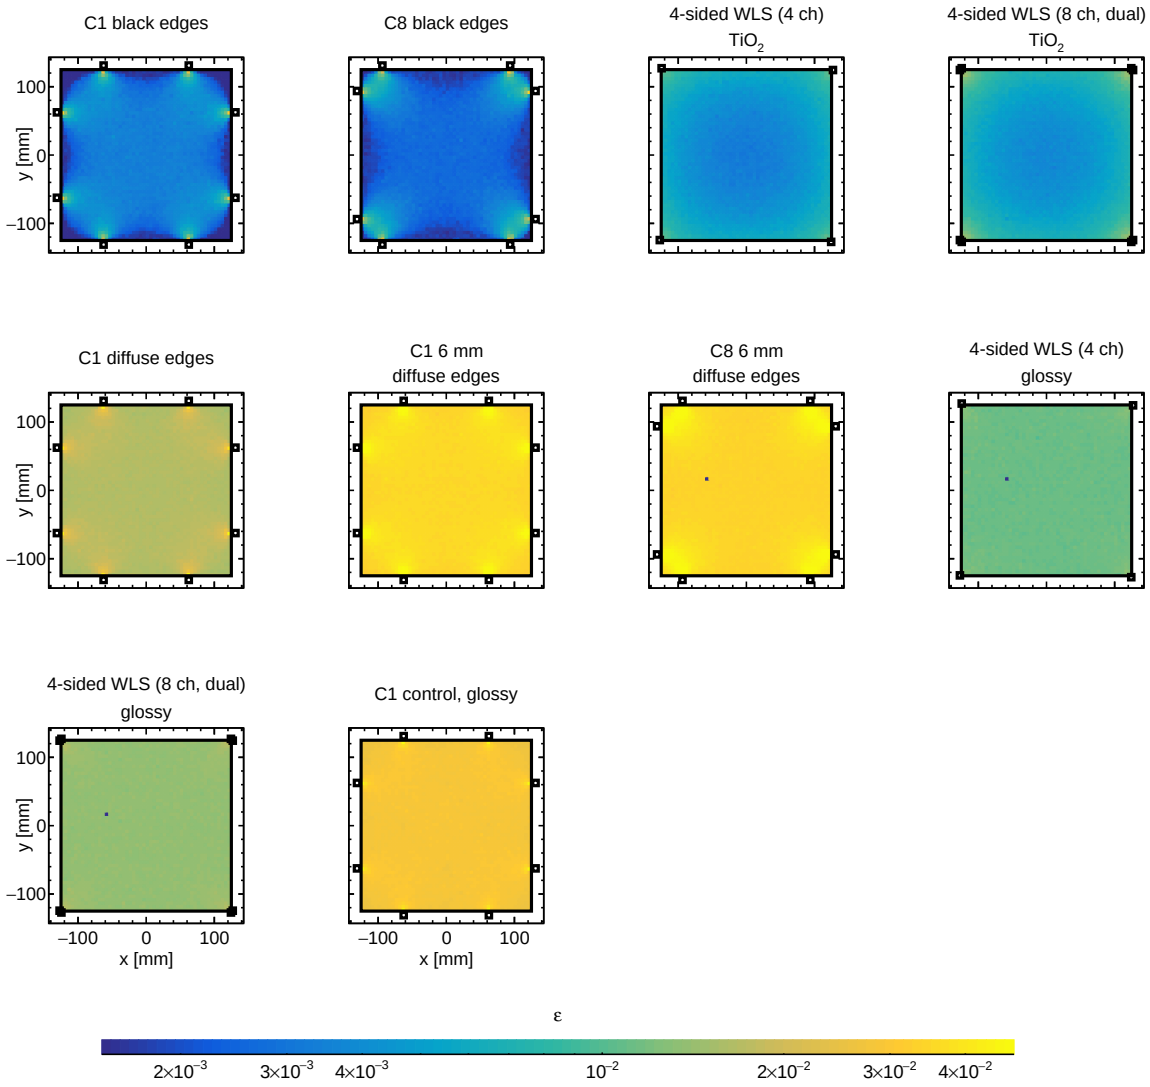



**Figure 43:** Collection efficiency over the plate for the campaign designs, in 5 mm cells and on one shared logarithmic colour scale (the range is set by the 1st–99th percentile of the pooled cells so that a single bright cell does not flatten the rest). Open squares mark the SiPM positions of each design's layout. Cells with no statistics are drawn in the underflow colour. The shared scale is what makes the comparison readable across designs, but it compresses the within-panel structure of the four brightest designs; Fig. 44 shows the same maps normalised per panel.

The efficiency maps (Fig. 43) put the two mechanisms of Sec. 6.3 side by side. The black-edge designs (top row) are the purest form of the nearest-sensor rule found anywhere in this study: the map is essentially the distance to the nearest SiPM, and the contrast is 1.89 in layout 1 and 3.01 in layout 8, against 1.07 for the same layout with a specular wrapper. Moving the eight sensors from $u = \pm 0.5$ to $u = \pm 0.75$ (layout 8) makes the field *less* uniform (1.89 to 3.01), the opposite of what a naive "spread the sensors" argument would predict, because the sensors move away from the centre of the plate and the ballistic read-out has no way to help the middle.

The diffuse narrow faces (second group) leave the large faces glossy, and the contrast stays at the specular floor: 1.14 in layout 1 with both 4 mm and 6 mm sensors, 1.33 in layout 8. A Lambertian *side* face does not destroy the mixing that the specular large faces provide, which is why this design is simultaneously the brightest and one of the most uniform.

The fibre designs divide by wrapper in a way that the yields do not. With the mirror clamp

they have the flattest efficiency fields in the entire study, 1.04 with four channels and 1.06 with eight—better than the specular control (1.07) and better than any design of Sec. 6—because a fibre reads a *line* rather than a point: every point of the plate is at a similar distance from the collector set, so the response no longer tracks a point-to-point distance. With the $TiO_2$ wrapper the same read-out gives 2.15 and 2.26: the paint dominates, and no arrangement of collectors rescues a wrapper that does not mix.

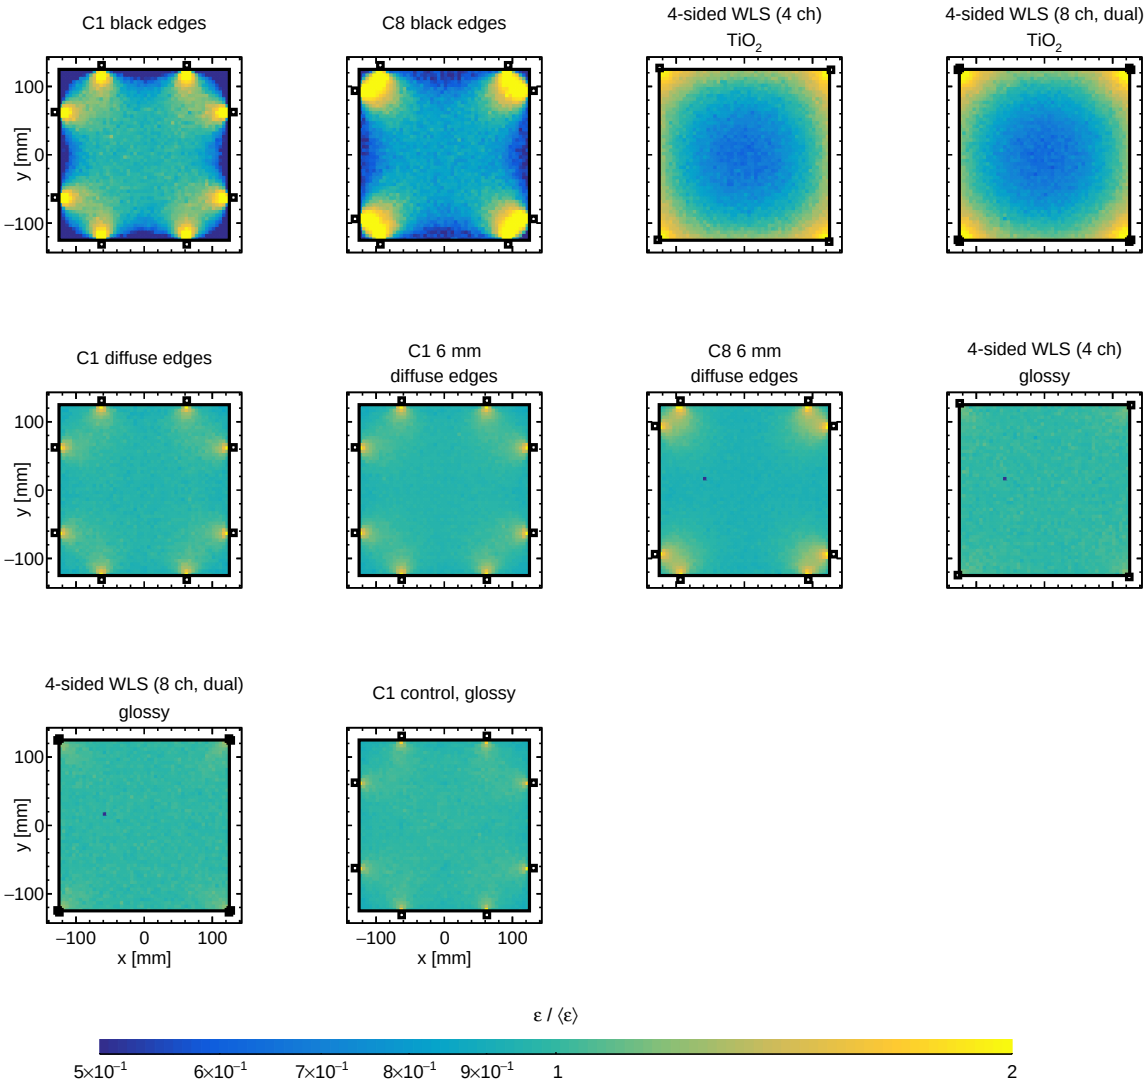



**Figure 44:** The maps of Fig. 43 normalised to each panel's own plate-averaged efficiency, on a shared logarithmic scale. This view separates *how much* light is collected from *where* it is collected: the ballistic designs concentrate it at the sensor cells, the specular-plate designs are flat, and the fibre designs show the two orthogonal line collectors. The scale is clipped at 0.5 and 2, so in the two ballistic designs the darkest cells are flat navy and the sensor cells flat yellow; the structure that the clip hides there is visible on the absolute scale of Fig. 43.

The normalised maps (Fig. 44) make the difference explicit. In the ballistic designs the bright cells are the cells that contain a sensor, as in the v6 maps of Sec. 6.3, and the cell between two sensors on the same face is the darkest. In the four-sided fibre designs the structure is a cross: four line collectors, two along each axis, and the field is flat to 6 % over most of the plate. This is the geometric reason why a fibre read-out is the right choice when uniformity matters more than yield.

## 10.4 Timing: what the light costs on the way out

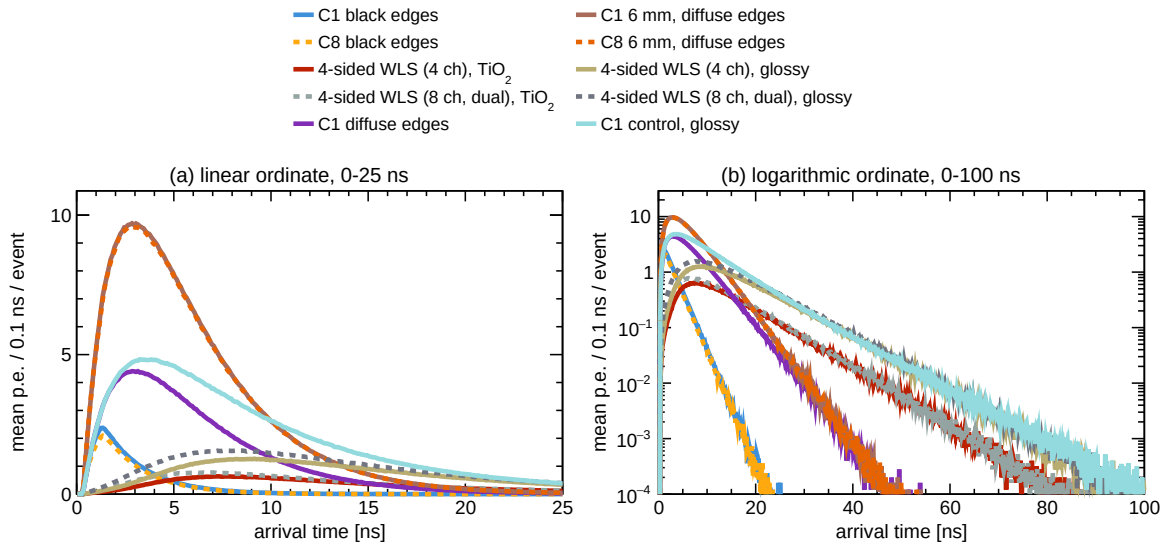



**Figure 45:** Mean photoelectron arrival-time profile of the campaign designs, pooled over all channels and divided by the number of events, so the ordinate is the mean number of photoelectrons per 0.1 ns in an event. Left: linear scale over the first 25 ns; right: logarithmic ordinate over 100 ns, which is where the wavelength-shifting tail lives.

The narrow-edge finish is the timing knob (Fig. 45, Table 17). Blackening the narrow faces makes the detector fast: 65 % of the photoelectrons arrive within 3 ns and 90 % within 5.65 ns, against 15 % and 20.35 ns for the control—a factor 3.6 in $t_{90}$. The reason is the same drain that costs the light: the surviving photons are the ones that reach a sensor directly, without the long random walk that a reflective cavity imposes. The diffuse narrow faces sit in between (25 %, 11.85 ns), consistent with a light path that is lengthened but not eliminated.

The fibre designs are the slowest of the ten: 2.3–5.4 % within 3 ns and $t_{90}$ of 24 ns–28 ns, with 91–96 % of the photoelectrons created by Geant4's `G4OpWLS` rather than by scintillation in the plate. That fraction is the quantitative statement of the price noted in Sec. 10.2: the fibre designs are not scintillation counters with a light guide, they are wavelength-shifting counters, and the 7 ns exponential re-emission sets the resolution of their timing. The glossy pair is systematically slower than the $TiO_2$ pair (28.15 ns against 25.05 ns at four channels), because the specular clamp reflects the light back into the plate at the mirror angle, so it has to randomise over several bounces before it can enter a fibre, whereas the paint randomises the direction at the first encounter.

## 10.5 Position resolution, and the trade-off the four knobs obey

Figure 46(a) applies the estimator of Sec. 8 to each design's own channel pattern. The single-axis rms errors fall into three groups that the yields alone do not predict. The two 6 mm designs are best, 11.5 mm and 11.8 mm, with the control at 15.9 mm; the black-edge designs follow at 18.8 mm and 17.4 mm and the diffuse-edge design at 19.9 mm. The four-sided fibre designs split by clamp: with the white clamp they reach 13.9 mm and 13.8 mm on a fifth of the control's light, while with the mirror clamp they collapse to 60.7 mm and 55.2 mm, barely better than the 72 mm prior of a plate that carries no position information at all. The statistical error of a resolution measured on 5000 test events is $\sigma_x/\sqrt{2N_{\text{test}}} \approx 0.2$ mm, so every difference quoted here is significant.

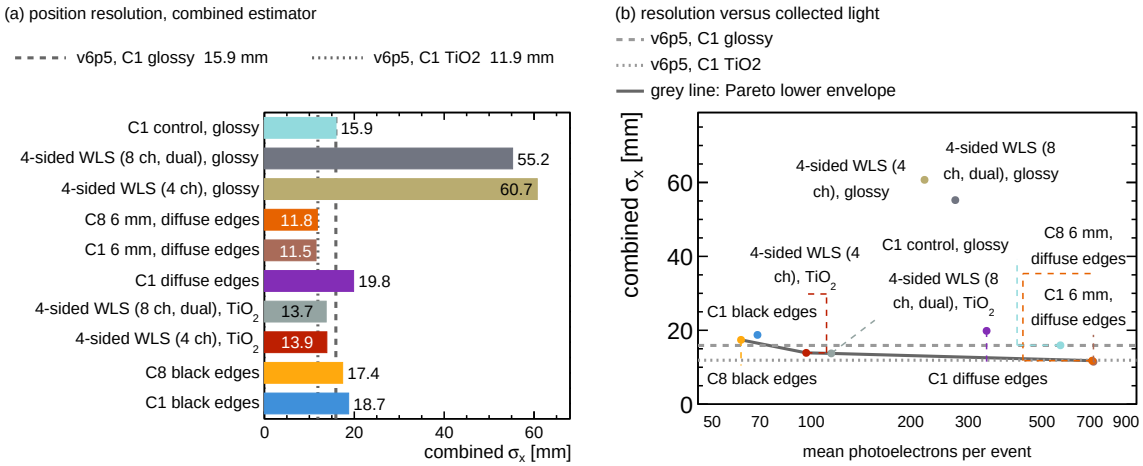



**Figure 46:** Left: single-axis position resolution obtained from each design's own channel pattern with the combined estimator of Sec. 8, on 5000 held-out events. The dashed and dotted lines are the config-1 glossy (15.9 mm) and $TiO_2$ (11.9 mm) references of Table 12 (v6p5, eight SiPMs): the first is the resolution of the layout the control reproduces, the second is what a wrapper that mixes light achieves with a fifth of the control's yield. Right: the same resolutions against the per-event yield, with every design labelled; the grey line is the Pareto lower envelope. The two mirror-clamp fibre designs are the points whose 55–61 mm approaches the 72 mm prior of a plate with no position information.

The per-estimator decomposition separates three ways in which the light can carry the position. Where the light is shared, the *amplitude* does the work: the white-clamp fibre designs reach 13.9 mm and 12.4 mm with the pulse integral alone and are poor with timing (30–38 mm for the first arrival), because every channel receives a share of every event and the shares themselves encode the entry point. Where the light is ballistic the reverse holds: in the control and the 6 mm designs the pulse integral is the worst estimator (46.2 mm and 30.3 mm) and the arrival time the best (17.4 mm and 13.7 mm), as in the v6p5 plate of Sec. 8. Blackening the narrow faces removes the late light; with only prompt photons and between 8 and 9 photoelectrons per channel the arrival-time spread is dominated by photoelectron jitter rather than by the path length, so the timing estimators degrade to 26 mm and the design falls back on an amplitude that sees one bright channel with large relative fluctuations. The mirror clamp is the third case: it transports light from any entry point to the read-out bundle, so each channel measures a line integral over the whole plate and *every* estimator fails (56–69 mm). The linear opposite-pair observable of Sec. 8 corroborates this from the same data—its slope is $8.7 \times 10^{-3}$ per millimetre with the white clamp and $4.3 \times 10^{-4}$ with the mirror, a factor 20—so the collapse is a property of the optics, not of the estimator.

Light therefore buys resolution only when it is partitioned. Within the direct-coupled family the scaling is pure statistics: the 6 mm design improves the control's 15.9 mm to 11.5 mm, against the 1.45 predicted by $\sqrt{N}$ for 2.1 times the light (measured 1.39), and the diffuse-edge design's 340 $N_{\mathrm{pe}}$ predict 20.6 mm against 19.9 mm measured. The white-clamp fibre design breaks that scaling: 13.8 mm with 115 $N_{\mathrm{pe}}$ is about 6.6 times more position information per photoelectron than the control. Figure 46(b) puts the two observables together; the Pareto front is formed by the 6 mm pair, the white-clamp fibre pair and the black-edge pair, each at a different corner, and the control lies inside it.

### 10.6 What to build

Read together, the ten completed designs answer the builder's question in a way that the wrapper study could not. One knob improves almost everything; the others each buy a single property at a measurable price, and one buys nothing at all.

The SiPM area is the only free lunch: 2.1 times the light, 1.4 times better position resolution—

precisely the $\sqrt{N}$ gain that the extra photons predict—and 1.8 times faster response, for 2.25 times the active area, at a 7 % higher exposure contrast. Where the budget allows it, the larger sensor is strictly better on everything except uniformity.

Blackening the narrow faces is the opposite: it is the fastest design in the study, 3.6 times faster than the control, and it costs 88 % of the light, nearly triples the relative width of the yield and gives the worst position resolution of the direct-coupled designs (18.8 mm against 15.9 mm). With 69 $N_{\mathrm{pe}}$/event it is still above the single-photoelectron threshold everywhere on the plate, so the loss is affordable if the observable is time rather than charge—it is the right choice for a detector that has to timestamp a muon, not for one that has to count or image photons.

The diffuse narrow faces are dominated on every count: they cost 40 % of the light to the specular alternative, leave the relative width slightly worse (0.28 against 0.25) and the resolution a quarter worse (19.9 mm), and buy no uniformity. If the goal is to avoid a black edge because the light is needed, the specular edge is better in every observable measured here. The only argument for the paint is mechanical—it is a diffuse reflector and does not need optical contact with a mirror—and that argument is not tested by this campaign.

The fibre read-out on every face is the only design that improves yield and uniformity together relative to its own single-sided counterpart (1.57 and 2.53 times the yield of configs 3 and 4, with the flattest field of the study), and it holds the record for position information per photoelectron (6.6 times the control). It pays for that with the slowest response in the study and with read-out hardware on all four faces. The clamp finish is not a detail: the same geometry with a mirror clamp collects more than twice as much light and loses the position information entirely, so the diffuse clamp is what turns the fibre from a light guide into a position sensor.

No design beats the control on all four observables. The 6 mm design dominates it on yield, timing and resolution and loses only on the 7 % contrast cost; the Pareto front of Fig. 46 is the honest summary of the rest. The study therefore does not discover a detector that is better than the one the measurement describes in every respect—it quantifies what each deviation from it would cost, which is the question a monitor designer actually asks.

## 11 Caveats and open items

**Config 4 collects less light than config 3, the opposite of the measurement.** With the nominal surfaces, config 4 reaches 87.0 $N_{\mathrm{pe}}$/event against 140.7 $N_{\mathrm{pe}}$/event for config 3 in the glossy treatment, a factor 1.6 too few, whereas Fig. 12 of Ref. [1] shows config 4 producing a significantly *higher* pulse height than config 3. The experiment reports that the WLS-converted photons produce electrical signals with approximately 30 % efficiency, so a substantial loss in the wavelength-shifting path is expected and is not reproduced here. The geometric cause is visible in the maps: in config 4 the light has to reach a single SiPM through four 1.0 mm fibres, of which only the converged bundle is actually read out, and the surviving light is then transported along the fibre to the read-out at one end. The simulation does model the fibre, the multi-clad index staircase, the far-end mirrors, the exponential re-emission and the photocathode, but it does not model the finite acceptance of the fibre mouths or the collection inefficiency of the re-emission at the fibre end, both of which are candidate causes. A quantitative light budget—photons produced, coupled into the fibres, surviving the transport, re-emitted within the acquisition window, and detected—has not been made, and this is the largest open item of the study. The comparison also inherits the caveat that the experiment itself states, namely that the four configurations cannot be compared directly because the number of parallel SiPMs changes the gain, the input capacitance and the effective photon-coupling probability; the experiment's config-4 value is a pulse height over a 2500 $\mathrm{mm}^2$ fibre-augmented effective area, not a raw photoelectron count.

**Two of the three reflector reflectances are fitted, not measured.** Only the aluminium reflectance is taken from data (the evaporated-film normal-incidence reflectance of McPeak *et al.* [20]). The $TiO_2$ paint curve is a representative white-paint curve ($R \approx 0.955$–$0.983$) and the

glossy paper curve ($R \approx 0.900$–$0.955$) is fitted to the statement that the two best wrappers give nearly equal signals. The robustness of the reported *ordering* to a systematic shift of these curves has not been tested; the ordering is expected to be robust, because the $TiO_2$ paint is separated from the mirrors by the absence of TIR rather than by a difference in reflectance, but this remains an untested assumption.

**The WLS absorption length is a systematic band, not a scanned parameter.** The absolute strength of the Y-11 absorption is set by the absorption length at 430 nm, taken as 1.0 mm with a plausible band of 0.3 mm to 3 mm. The config-4 yield is directly sensitive to it, and the band has not been scanned. The quoted config-4 numbers should therefore be read with a systematic band of a few tens of per cent on the yield.

**Bare-holder contact is effective, not measured.** Modelled with a real 1.2 mm air gap between the polished plate and the black holder ($f = 0$), the bare configuration keeps the full TIR cone but loses the entire sub-critical fraction at the black wall, and is the *third*-brightest wrapper in every layout—brighter than the paint, dimmer than the two mirrors—not the weakest. (With the lower-bound grease-backed foil it would sit second, since that foil falls below the bare plate.) Reproducing the experimental suppression requires the plate–holder interface to be optically *lossy*, i.e. partial real contact (frustrated TIR). The extended contact scan shows that the crossing fraction is $\approx 0.017$ at the centre in every layout, 0.003–0.009 at the edge/corner in configs 1–2, and 0.039–0.041 at the edge/corner of config 3. No single $f$ matches every cell exactly; the production nominal $f = 0.045$ is the smallest sampled fraction that places all nine cells below $TiO_2$, and the same nominal is applied to the bare faces of config 4, which the scan does not cover but which at $f = 0.045$ also falls below $TiO_2$ (19.5 versus 36.9 $N_{\mathrm{pe}}$/event). The fraction is an effective area fraction, not a measured holder gap, so $f = 0$ is retained as the clean-air reference and lower bound on the contact loss.

**Position trend of the diffuse paint.** As discussed in Sec. 9, the sign of the position trend of the $TiO_2$ paint is layout-dependent in the simulation and disagrees with the single trend reported in Ref. [1]. The mechanism is identified (the nearest-sensor rule of Sec. 6.3), but the simulation has not been checked against an independent set of simulation settings, and the experiment does not report the light-mixing behaviour that would decide the issue.

**Position reconstruction is limited by the optics, not by the estimator.** Sec. 8 shows that the relative pattern of the eight SiPM channels of config 1 localises the interaction point to 11.9 mm per axis (17.0 mm radially) with the diffuse $TiO_2$ paint, 15.7 mm–15.9 mm with the specular wrappers (via 12.5 % optical constant-fraction timing and a symmetry-augmented regression), and 19.4 mm with the contact-limited bare plate. However, the quoted numbers are those of an *optical* read-out: the simulation contains no SiPM saturation, no electronic noise, no threshold, no gain spread, no dark counts and no time jitter. The timing channel additionally assumes a per-channel time digitisation well below the 0.5 ns separations that carry the signal, and the response function is learned from simulated events rather than measured. The reported resolution should therefore be read as an upper bound for a real device.

**Scale and normalisation.** The absolute efficiencies are model-dependent: they are fixed by the assumed PDE curve, the grease coupling, and the absorbed fraction of the tabulated reflectivities. The SiPM breakdown voltage and gain (which drive the PDE) are also temperature-dependent [9], an effect not modelled here. The robust results are the *ordering* (glossy paper brightest and most uniform, air-backed aluminium second, contact-limited bare plate weakest in every layout), the threshold statement of Table 15, and the full-plate contrast hierarchy, not the absolute efficiencies.

**Optical-track stall (resolved).** During earlier matrix production runs a rare stall was observed: a single worker thread would enter a tight loop (100% CPU) while the remaining threads waited at the event-level barrier, freezing the run. It was traced to insufficiently robust photon tracking in the *tessellated* config-4 fibre solid, where near-coincident facet boundaries could leave a track stuck. The production config-4 geometry now uses the analytic, mitered `G4CutTubs` fibre legs (Sec. 3.4) instead, whose straight, planar miter interfaces eliminate that class of degenerate boundary; the stall has not recurred since. As a safety net the production workflow still wraps every task in a timeout with automatic retry.

## 12 Summary

A Geant4 optical simulation of a 250 mm×250 mm×10 mm polished plastic scintillator read out by side-mounted SiPMs has been developed and applied to a full matrix of five read-out layouts and four reflector treatments at three beam positions (150 000 generated events), complemented by a uniform whole-plate irradiation (500 000 generated events), a 99 000-event bare-contact scan and an 18 000-event aluminium-backing scan (767 000 generated events in total). The optical physics—unified surface model, finish selection, photocathode PDE via the boundary process, and per-event photon accounting—has been verified against the Geant4 source.

The starting point of the study is an inversion: of the four surface treatments compared in Ref. [1], the bare polished plate is the only one that returns no light to the plate—it is a total-internal-reflection guide whose sub-critical cone is swallowed by the black wall—and yet it is the dimmest in the measurement, below even the diffuse paint. In the model the bare plate is the third-brightest wrapper even in the idealised case ($f = 0$): the two mirrors are brighter, because they keep the same TIR cone and additionally hand the sub-critical fraction back with a reflectivity of 0.90–0.96, while the diffuse paint is dimmer; the inversion is therefore not a statement about the guide but about an extra loss channel. Two unmeasured surface parameters had to be calibrated before the measured ordering could be reproduced at all: the mean-field plate–holder contact fraction, locked at $f = 0.045$ as the smallest sampled value that places all nine direct-coupled cells below $TiO_2$, and the optical backing of the aluminium foil, taken as air because it reproduces the measured near-equality of aluminium and glossy paper. With them, every layout reproduces the experimentally observed ordering

$$\text{bare} < \text{TiO}_2 < \text{Al} < \text{glossy},$$

glossy paper being the brightest and the most uniform wrapper, air-backed aluminium within 92 % of it, and the contact-limited bare plate the weakest. A fifth layout, Config 2 (mod), truncates the four corners at 45° and puts one sensor on each cut face; it keeps the same ordering and within 4 % the total light of config 2, but it does not make the plate a better mixer. The measured statement that the bare configuration is the only one to fail the 80 % detection-efficiency criterion is reproduced as well, and is shown to be a statement about the *threshold window* rather than about a single number.

Underneath the ordering there is a single mechanism, and it organises the rest of the results. Two axes matter: the *survival* of the trapped light, which sets the yield, and the *mixing* of that light, which sets the uniformity of the response and the information content of the sensor pattern. The specular wrappers win on both; the diffuse paint wins on neither, and therefore is the dimmest wrapper but the one whose light sharing localises the muon; the bare plate wins on mixing and loses on survival, and is the only wrapper for which the two disagree. The unifying coordinate is the distance from the interaction point to the nearest collection site: the response tracks it whenever the cavity is not a perfect light mixer, which is why the full-plate contrast runs from 1.07 (glossy) to 10.90 (diffuse paint in the single-sided layout), and why the three-patch position trend of the paint reverses its sign between the four-sided and the single-sided layouts. The corner-cut layout is the direct confirmation: its instrumented corner is the brightest patch for every wrapper and its centre is the darkest point of the plate.

The same mechanism makes the eight channels of config 1 a position detector. With a symmetry-augmented, relevance-weighted nearest-neighbour regression, the diffuse paint fixes the interaction point to 12.3 mm per axis from light sharing alone (11.9 mm per axis and 17.0 mm radially when combined with prompt charge and timing, i.e. 5 % of the plate width), with no timing electronics needed; the specular wrappers are useless in pulse integral (44–46 mm) but reach 16.2 mm per axis from 12.5 % optical constant-fraction timing alone and 15.7 mm–15.9 mm combined, given a fast enough TDC. The contact-limited bare plate reaches 19.4 mm per axis when charge and timing are combined. These are the resolutions of the optical read-out alone: the simulation contains no SiPM saturation, electronic noise, threshold, gain spread or time jitter, and a real device would do worse. The WLS read-out of config 4 is delayed by about 4 ns and green-shifted to 498.5 nm by the Y-11 fibres, confirming that the WLS path is active; it is also the one configuration whose efficiency is not reproduced, collecting a factor 1.6 less light than config 3 where the measurement finds more, which remains the largest open item of the study.

Absolute efficiencies remain model-dependent (PDE, coupling, and tabulated reflectivities); the robust results are the wrapper and layout orderings, the threshold statement of Table 15, the full-plate contrast hierarchy, and the fact that the position information carried by a side-read-out trigger depends on the wrapper rather than on the read-out electronics.

## A Geant4 optical-physics implementation notes

This appendix collects the verification of the Geant4 optical boundary physics that the model relies on. It is reference material rather than a result, and is kept out of the main text for that reason.

### A.1 The boundary process and the unified surface model

Photon crossing of a dielectric interface is handled by `G4OpBoundaryProcess`, which selects an `G4OpticalSurface` from the unified surface model of Levin and Moisan [5] (whose key parameters for Geant4/GATE photon transport were later characterised [6]), using (*i*) a `G4LogicalBorderSurface` between two physical volumes or (*ii*) a `G4LogicalSkinSurface` on a logical volume. Reading the source (lines 319–347), the lookup is: a border surface between the pre- and post-step volumes is consulted first; if none exists, the skin surface of the daughter (or, failing that, the mother) logical volume is used. This establishes two facts on which the geometry relies:

1. a `G4LogicalBorderSurface` takes precedence over a `G4LogicalSkinSurface` at the same boundary—hence the grease and SiPM patches punch "holes" in the wrapping skin;
2. if no surface object exists at a boundary, the process falls back to the default lossless TIR behaviour (via `DielectricDielectric()`).

The boundary process requires a valid `RINDEX`: on medium 1 always, and on medium 2 for a `polished`/`ground` `dielectric_dielectric` boundary (lines 289–306, 436–453); `*backpainted` finishes instead read the backing index from the *surface* MPT (lines 356–374). If the property is absent the process sets status `NoRINDEX` and kills the photon *silently*—the message is printed only above verbose level 1—which is why every material (and every backpainted surface) in the model carries an explicit `RINDEX` table. This silent kill is also why the far-end fibre mirror needed an explicit skin (Sec. 3.4): the metal cap has no `RINDEX`, so the un-covered core-to-cap crossing was being lost.

For the *unified* model the probability weights for the reflection sub-models are read from the surface MPT—`SPECULARSPIKECONSTANT` ($f_{ss}$), `SPECULARLOBECONSTANT` ($f_{sl}$) and `BACKSCATTERCONSTANT` ($f_{bs}$)—together with `REFLECTIVITY` (line 381) and, where applicable, `TRANSMITTANCE` (line 394) and `EFFICIENCY` (line 390). The surviving probability $1 - f_{ss} - f_{sl} - f_{bs}$ is shared between diffuse (Lambertian) and bare reflection.

### A.2 Reflector finishes

The four treatments use three distinct code paths in `G4OpBoundaryProcess`, which we verified:

- `groundfrontpainted` ($TiO_2$). The finish is handled by the "painted-front" branch (lines 462–488): a uniform random draw against `REFLECTIVITY` decides absorbed / transmitted / reflected, and reflection is set to a pure Lambertian distribution (`LambertianReflection`, line 481). There is *no* TIR at this finish—photons are either diffusely reflected or absorbed. This is the physically correct description of sub-surface scattering in a thick $TiO_2$ paint.
- `polishedbackpainted` (Al, glossy paper). This finish is routed to `DielectricDielectric()` (line 456–459). The scintillator/backing interface still exhibits Fresnel reflection and TIR; sub-critical photons cross it and are returned by the backing "paint" with reflectivity $R(\lambda)$ and a reflection distribution set by $f_{ss}, f_{sl}, f_{bs}$. We choose $f_{ss} = 1$ (pure specular spike), since both wrappers are smooth mirrors, and set the backing refractive index to distinguish the two physical situations. For the aluminium foil the backing index is the coupling grease ($n = 1.46$), following Ref. [1], which applies grease so the foil optically contacts the plate; the critical angle is then only $\arcsin(1.46/1.58) = 67.5°$, so most light refracts out of the plate and is returned specularly by the foil, whose reflectivity is the tabulated normal-incidence reflectance of evaporated aluminium. For glossy paper the backing index is that of air ($n = 1.0003$), so the plate keeps its full TIR cone and only the sub-critical fraction reaches the paper, which acts as a slightly lossier mirror.
- **Bare plate**. This is deliberately *not* given a wrapping skin. The plate keeps its plain polished boundary across a real 1.2 mm air gap to the holder shell. The sub-critical fraction refracts across that gap and is then killed by the holder: the black shell carries an absorbing skin ($R = T = 0$), and its bulk (1 µm absorption length) would absorb the light anyway. Super-critical light is retained by TIR. There is *no* absorbing skin on the plate itself; the same air-gap loss is applied at the read-out pads, which are separated from the plate by a thin air border in this configuration.

## B The position-reconstruction machinery in detail

This appendix collects the formal definitions behind Sec. 8: the statistics of the first-arrival time, the two constant-fraction estimators that are not used for the headline results, and the full definition of the learned estimator. It is reference material rather than a result, and is kept out of the main text for that reason.

### B.1 The first-arrival time as an extreme order statistic

The simplest timing observable is the first-photoelectron arrival time $t_s^{\text{first}} = t_{(1),s}$. While convenient, $t_{(1),s}$ is an extreme order statistic of a finite sample of size $N_s$ and suffers from two distinct defects that act in opposite regimes:

1. *Order-statistic amplitude walk in light-sharing wrappers.* For the double-exponential scintillation pulse of Fig. 5 ($\tau_r = 0.9\,\text{ns}$, $\tau_d = 2.1\,\text{ns}$), the early photon arrival density above the ballistic wavefront $t_{0,s}$ grows linearly with time:

$$p_s(t) \approx \kappa\,(t - t_{0,s})\,\Theta(t - t_{0,s}), \qquad \kappa \approx \frac{1}{\tau_r \tau_d}, \tag{12}$$

so the cumulative distribution near the onset is quadratic, $F_s(t) \approx \frac{1}{2}\kappa(t - t_{0,s})^2$. Drawing $N_s$ independent photoelectrons yields a Weibull extreme-value law of index 2 for the first arrival, $\mathbb{P}(t_{(1),s} - t_{0,s} > \delta) \approx \exp(-\frac{1}{2}N_s\kappa\delta^2)$, with mean and standard deviation

$$\mathbb{E}\big[t_{(1),s} - t_{0,s}\big] = \sqrt{\frac{\pi}{2\kappa N_s}}, \qquad \sigma\big(t_{(1),s}\big) = \sqrt{\frac{4-\pi}{2\kappa N_s}}. \tag{13}$$

Even at identical propagation distance, a channel that collects more photoelectrons triggers earlier by $\propto N_s^{-1/2}$. In the diffuse $TiO_2$ wrapper, where a corner muon delivers $\sim 68$ photoelectrons to the adjacent corner sensors and only $\sim 6$ to the opposite sensors, Eq. 13 shifts $t_{(1),s}$ earlier at the bright sensors by several hundred picoseconds purely from sample-size bias—the optical analogue of fixed-threshold amplitude walk.

2. *Extreme-tail shot noise in specular wrappers.* In the air-backed aluminium and glossy wrappers, total internal reflection mixes the integrated charge so thoroughly that $N_s \approx 60$–$65$ is nearly identical across all eight channels, eliminating amplitude walk between channels. There, however, $t_{(1),s}$ samples only the $1/N_s \approx 1.5\,\%$ extreme tail of the arrival distribution and fluctuates from event to event depending on whether a single prompt photon enters the $4\,\mathrm{mm}\times 4\,\mathrm{mm}$ aperture on its first pass.

### B.2 Variants of the constant-fraction estimator

Besides the leading-$\alpha$ wavefront mean of Eq. 7, two further constant-fraction quantities are defined on the empirical cumulative photoelectron distribution $\hat{F}_s(t) = N_s^{-1}\sum_{j=1}^{N_s}\Theta(t - t_{(j),s})$. The first is the *continuous $\alpha$-quantile arrival time* $t^{\mathrm{q}}_{\alpha,s}$, obtained by piecewise-linear interpolation of the order statistics at rank $u_s = \max(0,\, \alpha N_s - 1)$ with $\gamma_s = u_s - \lfloor u_s \rfloor$:

$$t^{\mathrm{q}}_{\alpha,s} = (1-\gamma_s)\, t_{(\lfloor u_s\rfloor+1),s} + \gamma_s\, t_{(\min(N_s,\,\lfloor u_s\rfloor+2)),s}. \tag{14}$$

Its asymptotic variance $\alpha(1-\alpha)/\big(N_s[p_s(t_\alpha)]^2\big)$ becomes large at distant sensors, where the $\lceil \alpha N_s\rceil$-th photon falls in the low-density trough between the ballistic peak and the reverberation tail; the wavefront mean of Eq. 7 averages over all photoelectrons in the leading $12.5\,\%$ wavefront, where $p_s(t)$ is largest. The quantile time is quoted in Table 11 for the bare plate, where it is marginally better than the wavefront mean; in the two specular wrappers it is markedly worse, and it degrades steeply with $\alpha$ (from 193 mm at $\alpha = 12.5\,\%$ to 660 mm at $\alpha = 50\,\%$ in glossy paper, against 182 mm and 279 mm for the wavefront mean).

The second is the *tapered* Beta$(1,3)$ *wavefront L-estimator* $t^{\mathrm{CFD}}_{\alpha,s}$, which weights the leading fraction $\xi \in [0,1]$ (where $\xi = u/q_s$) with the smooth kernel $\psi(\xi) = 3(1-\xi)^2$:

$$\begin{aligned} t^{\mathrm{CFD}}_{\alpha,s} &= \frac{\sum_{j=1}^{\lceil q_s\rceil} w_j\, t_{(j),s}}{\sum_{j=1}^{\lceil q_s\rceil} w_j}, \\ w_j &= \int_{(j-1)/q_s}^{\min(1,\,j/q_s)} 3(1-\xi)^2\, d\xi = \left(1 - \frac{j-1}{q_s}\right)^3 - \left(1 - \min\left(1, \frac{j}{q_s}\right)\right)^3. \end{aligned} \tag{15}$$

Because the weight $\psi(\xi)$ vanishes to second order at the boundary $\xi = 1$, a photoelectron crossing the $\alpha N_s$ cutoff enters with zero weight, making $t^{\mathrm{CFD}}_{\alpha,s}$ $C^2$-smooth with respect to $N_s$ and eliminating integer-rank discretization jumps. This variant is the timing block of the `combined` estimator.

### B.3 The learned estimator in detail

The estimator of Sec. 8.3 is a *symmetry-equivariant, relevance-weighted kernel $k$-nearest-neighbour regression* in the standardised feature space, defined in four steps.

**Event-centred feature blocks.** For each event $e$, the eight-channel measurements are grouped into translation- and yield-invariant blocks $\mathbf{f}_e^{(b)} \in \mathbb{R}^8$ $(b = 1, \ldots, B)$, each centred on its per-event mean so that common-mode fluctuations (total light yield $N_\gamma^{(e)}$ or global interaction time $t_0$)

cancel identically:

$$f_{e,s}^{\mathrm{amp}} = \frac{N_{e,s}}{\sum_{q=0}^{7} N_{e,q}} - \frac{1}{8}, \qquad f_{e,s}^{\mathrm{prompt}} = \frac{N_{e,s}^{\mathrm{prompt}}}{\sum_{q=0}^{7} N_{e,q}^{\mathrm{prompt}}} - \frac{1}{8},$$
$$f_{e,s}^{\mathrm{time},(m)} = t_{e,s}^{(m)} - \frac{1}{|\mathcal{A}_e|} \sum_{q \in \mathcal{A}_e} t_{e,q}^{(m)}, \tag{16}$$

where $\mathcal{A}_e = \{q : N_{e,q} > 0\}$ is the set of active channels and $t_{e,s}^{(m)}$ denotes the timing observable ($t_{(1),s}$, $t_{12.5\%,s}^{\mathrm{CFD}}$, or $\bar{t}_{\leq 12.5\%,s}$).

**Block-invariant standardisation.** Each eight-sensor block $b$ is standardised using a single mean $\mu_b$ and standard deviation $\sigma_b$ pooled over all $8N_{\mathrm{tr}}$ entries of that block in the training set:

$$z_{i,s}^{(b)} = \frac{f_{i,s}^{(b)} - \mu_b}{\sigma_b}, \qquad \mu_b = \frac{1}{8N_{\mathrm{tr}}} \sum_{i=1}^{N_{\mathrm{tr}}} \sum_{s=0}^{7} f_{i,s}^{(b)}, \qquad \sigma_b = \left[ \frac{1}{8N_{\mathrm{tr}}} \sum_{i=1}^{N_{\mathrm{tr}}} \sum_{s=0}^{7} \left( f_{i,s}^{(b)} - \mu_b \right)^2 \right]^{1/2}. \tag{17}$$

Pooling $\mu_b$ and $\sigma_b$ across the eight symmetric sensors of block $b$ guarantees that spatial permutations of the eight sensors commute with feature standardisation.

**Dihedral group $D_4$ equivariance (eight-fold training augmentation).** The square plate $[-L, L]^2$ and the config-1 sensor coordinates $\{\mathbf{r}_s\}_{s=0}^{7}$ are invariant under the eight-element dihedral group of the square,

$$D_4 = \left\langle r, \sigma_x \;\middle|\; r^4 = \sigma_x^2 = e,\ \sigma_x r \sigma_x = r^{-1} \right\rangle, \qquad |D_4| = 8, \tag{18}$$

comprising the four rotations by $0°, 90°, 180°, 270°$ and the four reflections across $x = 0$, $y = 0$ and the diagonals $x = \pm y$. Each orthogonal transformation $T_g \in D_4$ ($\det T_g = \pm 1$) maps the sensor array onto itself via a bijection $\pi_g : \{0, \ldots, 7\} \to \{0, \ldots, 7\}$ defined by $\mathbf{r}_{\pi_g(s)} = T_g \mathbf{r}_s$, which induces an $8 \times 8$ orthogonal permutation matrix $\Pi_g$ ($\Pi_g^\top \Pi_g = I_8$) acting identically on every feature block $\mathbf{z}^{(b)}$. By physical symmetry, if $(\mathbf{z}_i, \mathbf{y}_i)$ is a valid calibration event, then $(\Pi_g \mathbf{z}_i, T_g \mathbf{y}_i)$ is an equally valid realization for all $g \in D_4$. We therefore measure the similarity between training event $i$ and test pattern $\mathbf{z}_t$ by the $D_4$-quotient distance

$$d_w^2(i,t) = \min_{g \in D_4} \sum_{b=1}^{B} w_b \left\| \Pi_g \mathbf{z}_i^{(b)} - \mathbf{z}_t^{(b)} \right\|_2^2 = \min_{g \in D_4} \sum_{b=1}^{B} w_b \left\| \mathbf{z}_i^{(b)} - \Pi_g^\top \mathbf{z}_t^{(b)} \right\|_2^2, \tag{19}$$

recording the optimal symmetry element $g^*(i,t)$ that achieves the minimum. This expands the effective training sample eight-fold from $N_{\mathrm{tr}} = 20\,000$ to $8N_{\mathrm{tr}} = 160\,000$ patterns—reducing the characteristic nearest-neighbour distance in a $d$-dimensional space by $8^{-1/d}$ and populating the corners and edges uniformly—while the orthogonality identity on the right-hand side of Eq. 19 allows the eight permuted query vectors $\Pi_g^\top \mathbf{z}_t$ to be precomputed in L1 cache so the training table remains at its un-augmented size $N_{\mathrm{tr}}$.

**Inverse-variance metric weighting and tricube kernel regression.** When blocks of very different predictive power are concatenated with equal weight ($w_b = 1$), uninformative blocks (such as the pulse integrals in a specular wrapper, where $\sigma_{r,\mathrm{amp}} \approx 63\,\mathrm{mm}$) contribute eight dimensions of pure Poisson variance to Eq. 19 and corrupt the neighbour ranking. Denoting by $\sigma_{r,b}$ the single-block radial rms error and $\sigma_{r,\min} = \min_c \sigma_{r,c}$, each block in the combined estimator is weighted by its inverse fourth-power error (squared inverse MSE):

$$w_b = \left( \frac{\sigma_{r,\min}}{\sigma_{r,b}} \right)^4. \tag{20}$$

This automatically suppresses noisy blocks ($w_{\mathrm{amp}} = 0.017$ in glossy paper and $w_{\mathrm{time}} = 0.088$ in $TiO_2$) while retaining all blocks at comparable weight ($w_b \in [0.76, 1]$) in the bare plate where every channel contributes. From the $k = 40$ nearest symmetry-matched training events $\{(i_m, g_m^*)\}_{m=1}^{k}$ with sorted distances $d_1 \le d_2 \le \cdots \le d_k$, the interaction position is reconstructed via a Nadaraya–Watson estimator with a compact tricube kernel:

$$\hat{\mathbf{y}}_t = \frac{\sum_{m=1}^{k} K\left(\dfrac{d_m}{h_t}\right) T_{g_m^*} \mathbf{y}_{i_m}}{\sum_{m=1}^{k} K\left(\dfrac{d_m}{h_t}\right)}, \qquad K(u) = \left(1 - u^3\right)^3 \Theta(1-u), \qquad h_t = 1.05\, d_k. \tag{21}$$

## References


[1] G. Rao, A. Bieberle, U. Hampel, M. Wagner, *Design studies on large muon trigger detectors using silicon photomultiplier devices*, J. Appl. Phys. **138**, 114504 (2025). doi:10.1063/5.0288270.

[2] S. Agostinelli *et al.*, *Geant4—a simulation toolkit*, Nucl. Instrum. Methods A **506**, 250–303 (2003). doi:10.1016/S0168-9002(03)01368-8.

[3] J. Allison *et al.*, *Recent developments in Geant4*, Nucl. Instrum. Methods A **835**, 186–225 (2016). doi:10.1016/j.nima.2016.06.125.

[4] Geant4 Collaboration, *Geant4 Physics Reference Manual*, CERN, v11.3 (doc. Rev. 9.2). https://geant4-userdoc.web.cern.ch/UsersGuides/PhysicsReferenceManual/BackupVersions/V11.3b/html/index.html.

[5] A. Levin, C. Moisan, *A more physical approach to model the surface treatment of scintillation counters and its implementation into DETECT*, 1996 IEEE Nuclear Science Symposium Conference Record **2**, 702–706. doi:10.1109/NSSMIC.1996.591410.

[6] J. Nilsson, V. Cuplov, M. Isaksson, *Identifying key surface parameters for optical photon transport in GEANT4/GATE simulations*, Appl. Radiat. Isot. **103**, 15–24 (2015). doi:10.1016/j.apradiso.2015.04.017.

[7] S. Korpachev, M. Chadeeva, *Geant4 simulation of optical photon transport in scintillator tile with direct readout by silicon photomultiplier*, J. Phys. Conf. Ser. **798**, 012218 (2017). doi:10.1088/1742-6596/798/1/012218.

[8] S. Gundacker, A. Heering, *The silicon photomultiplier: fundamentals and applications of a modern solid-state photon detector*, Phys. Med. Biol. **65**, 17TR01 (2020). doi:10.1088/1361-6560/ab7b2d.

[9] N. Anfimov *et al.*, *Study of silicon photomultiplier performance at different temperatures*, Nucl. Instrum. Methods A **997**, 165162 (2021). doi:10.1016/j.nima.2021.165162.

[10] AdvanSiD (Cefla), *NUV SiPMs — Chip Scale Package (CSP)*, Rev. 9 (2015), vendor datasheet. https://indico.cern.ch/event/566138/contributions/2287560/attachments/1400219/2139198/Advansid_datasheet_NUV.pdf.

[11] Eljen Technology, *General Purpose Plastic Scintillator: EJ-200, EJ-204, EJ-208, EJ-212*, data sheet (Rev. Aug 2023). https://eljentechnology.com/images/products/data_sheets/EJ-200_EJ-204_EJ-208_EJ-212.pdf.

[12] A. Artikov *et al.*, *Properties of the Ukraine polystyrene-based plastic scintillator UPS 923A*, Nucl. Instrum. Methods A **555**, 125–131 (2005). doi:10.1016/j.nima.2005.09.021.

[13] Amcrys, *Data Sheet: Polystyrene-based Plastic Scintillators*, Scintillation Material Data Sheet (September 2009). http://www.amcrys.com/pdf/4286_.pdf.

[14] J. B. Birks, *Scintillations from organic crystals: specific fluorescence and relative response to different radiations*, Proc. Phys. Soc. A **64**, 874–877 (1951). doi:10.1088/0370-1298/64/10/303.

[15] R. L. Craun, D. L. Smith, *Analysis of response data for several organic scintillators*, Nucl. Instrum. Methods **80**, 239–244 (1970). doi:10.1016/0029-554X(70)90768-8.

[16] Kuraray Co., Ltd., *Plastic Scintillating Fibers (PSF)* product catalogue (Y-11 wavelength-shifting grade). https://www.kuraray.com/content/dam/methacrylate/en/documents/psf.pdf.

[17] I. Alekseev *et al.*, *The performance of a new Kuraray wavelength shifting fiber YS-2*, J. Instrum. **17**, P01031 (2022). doi:10.1088/1748-0221/17/01/P01031.

[18] K. N. Borozdin *et al.*, *Radiographic imaging with cosmic-ray muons*, Nature **422**, 277 (2003). doi:10.1038/422277a.

[19] L. Bonechi, R. D'Alessandro, A. Giammanco, *Atmospheric muons as an imaging tool*, Rev. Phys. **5**, 100038 (2020). doi:10.1016/j.revip.2020.100038.

[20] K. M. McPeak, S. V. Jayanti, S. J. P. Kress, S. Meyer, S. Iotti, A. Rossinelli, D. J. Norris, *Plasmonic films can easily be better: rules and recipes*, ACS Photonics **2**, 326–333 (2015). doi:10.1021/ph5004237.

[21] A. Taheri, R. Gholipour Peyvandi, *The impact of wrapping method and reflector type on the performance of rod plastic scintillators*, Measurement **97**, 100–110 (2017). doi:10.1016/j.measurement.2016.10.051.